


# three-phase compact power supply

240 W

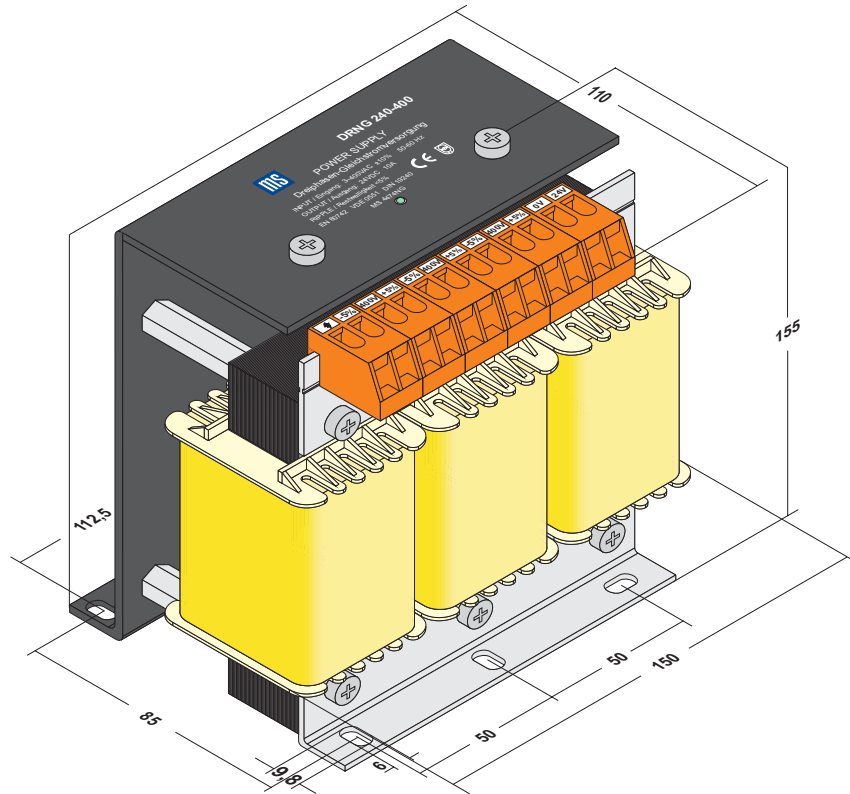

DRNG	order-nr	input	tapping	power / voltage / current
	MS4474NG	3x400V	± 5%	240W 24VDC/10ADC

## technical datas:

input-voltage/voltage-tolerance:	3~ 400 V / 50 - 60 Hz ± 10%
output-voltage / output-current:	24VDC / 10 A + 15% ; - 10%
output-ripple:	< 4,2%
ambient temperature:	0 - +50°C
safety standard:	EN 60742 VDE 0551, DIN 19240
protection-class:	I / IP00
LED-display:	green; output-voltage is on
terminal connectors:	VBG 4
short-circuit-proof protection:	external fuse (T0,5A, IEC 127)