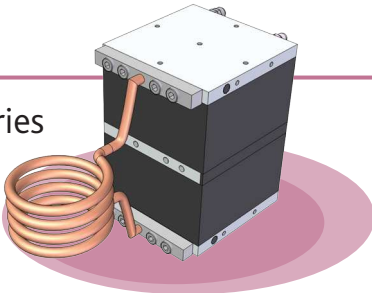
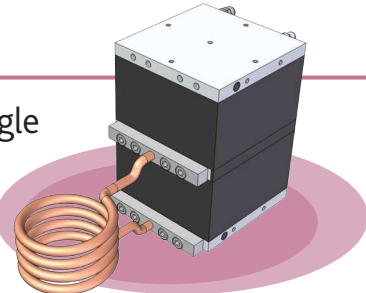
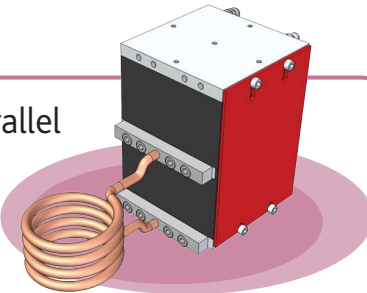
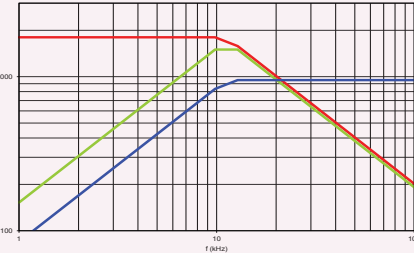
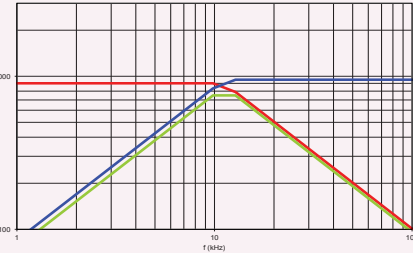
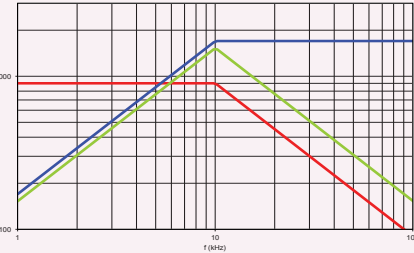
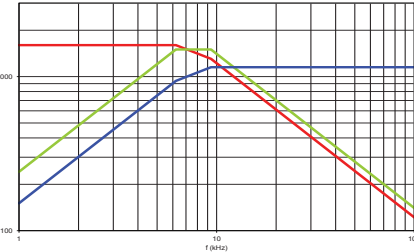
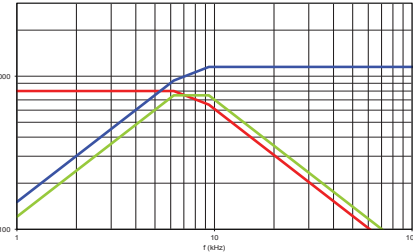
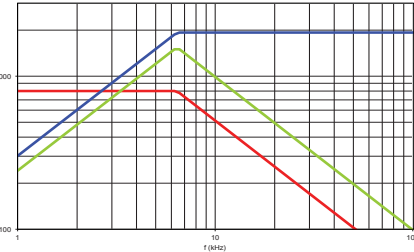
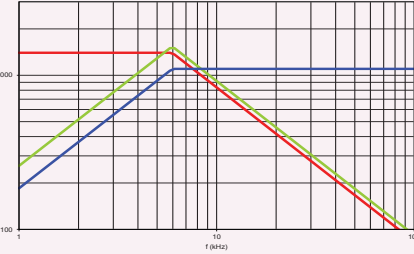
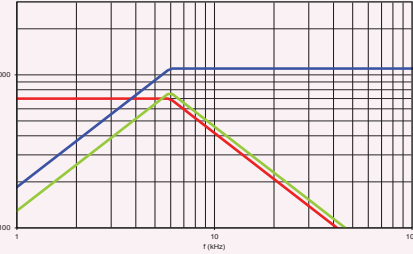
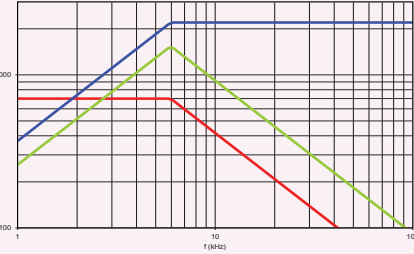
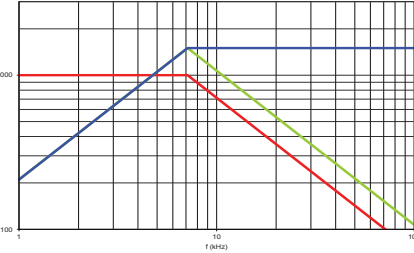
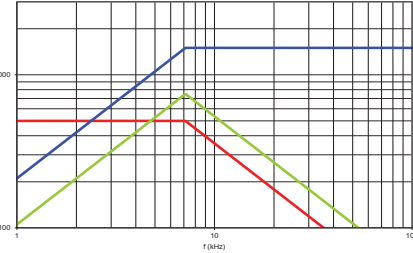
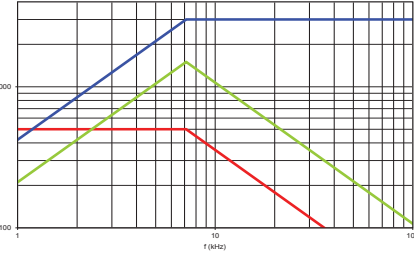
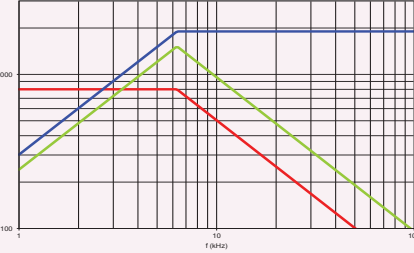
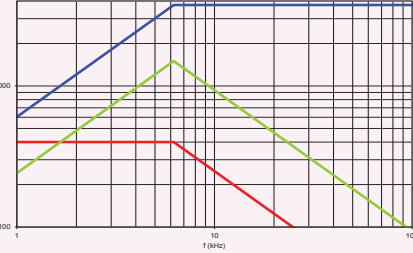
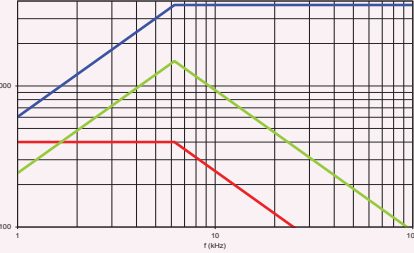


	Specifications							130 x 131 x 189			Series	Single	Parallel
	Capacitance [±10%] (μF)	Configuration	Sinusoidal Voltage (V _{rms})	Peak Voltage (V)	Max. Current (A _{rms})	Max. Power (kVA _r)	Half power freq. range (kHz)		Weight Al (kg)	Weight Cu (kg)			
CLF3 30	7.5	series	1800	2520	950	1500	5-26		4.9	8.7			
	15	single	900	1260	950	750	5-26				7.5 μF 1800 V _{rms} 950 A _{rms} 1500 kVA _r	15 μF 900 V _{rms} 950 A _{rms} 750 kVA _r	30 μF 900 V _{rms} 1700 A _{rms} 1500 kVA _r
	30	parallel	900	1260	1700	1500	5-20						
CLF3 60	15	series	1600	2240	1150	1500	3-19		5.0	8.8			
	30	single	800	1120	1150	750	3-19				15 μF 1600 V _{rms} 1150 A _{rms} 1500 kVA _r	30 μF 800 V _{rms} 1150 A _{rms} 750 kVA _r	60 μF 800 V _{rms} 1930 A _{rms} 1500 kVA _r
	60	parallel	800	1120	1930	1500	3-13						
CLF3 84	21	series	1400	1960	1100	1500	3-12		5.2	9.0			
	42	single	700	980	1100	750	3-12				21 μF 1400 V _{rms} 1100 A _{rms} 1500 kVA _r	42 μF 700 V _{rms} 1100 A _{rms} 750 kVA _r	84 μF 700 V _{rms} 2200 A _{rms} 1500 kVA _r
	84	parallel	700	980	2200	1500	3-12						
CLF3 134	33.5	series	1000	1400	1500	1500	4-14		5.4	9.2			
	67	single	500	700	1500	750	4-14				33.5 μF 1000 V _{rms} 1500 A _{rms} 1500 kVA _r	67 μF 500 V _{rms} 1500 A _{rms} 750 kVA _r	134 μF 500 V _{rms} 3000 A _{rms} 1500 kVA _r
	134	parallel	500	700	3000	1500	4-14						
CLF3 240	60	series	800	1120	1900	1500	3-13		5.6	9.4			
	120	single	400	560	1900	750	3-13				60 μF 800 V _{rms} 1900 A _{rms} 1500 kVA _r	120 μF 400 V _{rms} 1900 A _{rms} 750 kVA _r	240 μF 400 V _{rms} 3750 A _{rms} 1500 kVA _r
	240	parallel	400	560	3750	1500	3-12						

I(A) ——— Q(kVA_r) ——— V_{rms} ———