
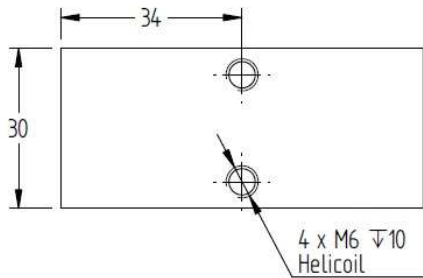


CSP 150/400

Conduction-cooled capacitor

Technology Patented Worldwide



Specifications

Type		CSP 150/400									
Dimensions (L x W x H)	mm	68 x 30 x 30.2									
Weight	kg	0.3									
Capacitance ($\pm 10\%$)	μF	0.05 μF	0.1 μF	0.17 μF	0.33 μF	0.5 μF	0.66 μF	1 μF	1.33 μF	2.4 μF	
Sinusoidal Voltage	V _{rms}	1000			800		700		600	500	
Peak Voltage	V	1410			1130		990		850	710	
Max. Current	A _{rms}	400			500		650		800		
Max. Power	kVA _r	400									
Freq Range @ Full Power	kHz	1274-1274	637-637	375-375	302-302	199-199	197-255	130-168	133-192	106-106	
Stray Inductance	nH	< 3									


Celem Power Capacitors

Produced: 07-01-2014


CSP 150/400

Conduction-cooled capacitor


Technology Patented Worldwide

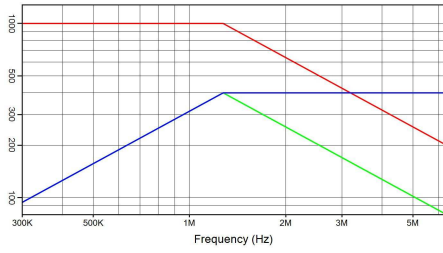


CSP 150/400 0.05 µF 1000 V_{rms} 400 A_{rms} 400 kVA_r
 I(A) — Q(kVA_r) — V_{rms}

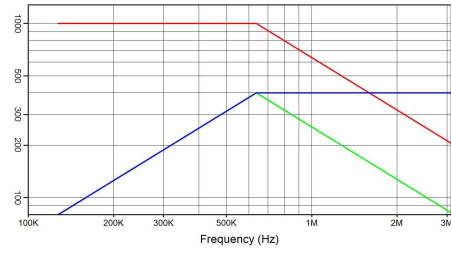


CSP 150/400 0.1 µF 1000 V_{rms} 400 A_{rms} 400 kVA_r
 I(A) — Q(kVA_r) — V_{rms}

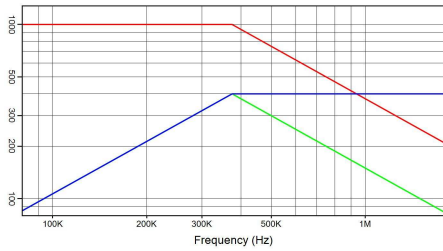


CSP 150/400 0.17 µF 1000 V_{rms} 400 A_{rms} 400 kVA_r
 I(A) — Q(kVA_r) — V_{rms}

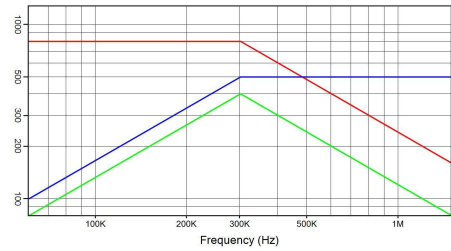


CSP 150/400 0.33 µF 800 V_{rms} 500 A_{rms} 400 kVA_r
 I(A) — Q(kVA_r) — V_{rms}

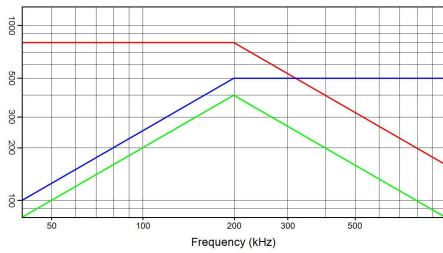


CSP 150/400 0.5 µF 800 V_{rms} 500 A_{rms} 400 kVA_r
 I(A) — Q(kVA_r) — V_{rms}

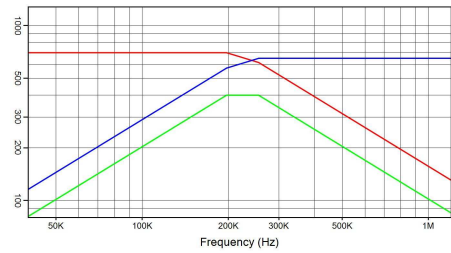


CSP 150/400 0.66 µF 700 V_{rms} 650 A_{rms} 400 kVA_r
 I(A) — Q(kVA_r) — V_{rms}

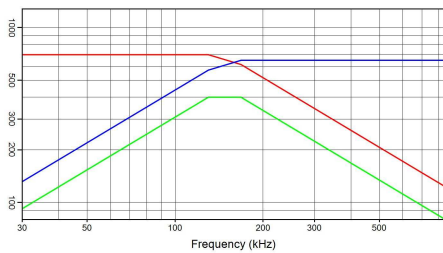

CSP 150/400 1 µF 700 V_{rms} 650 A_{rms} 400 kVA_r
 I(A) — Q(kVA_r) — V_{rms}

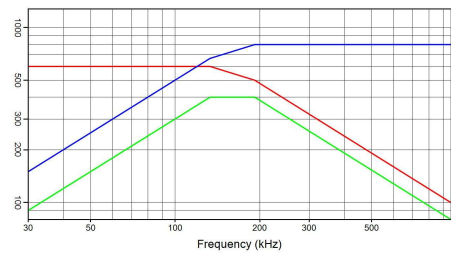

CSP 150/400 1.33 µF 600 V_{rms} 800 A_{rms} 400 kVA_r
 I(A) — Q(kVA_r) — V_{rms}

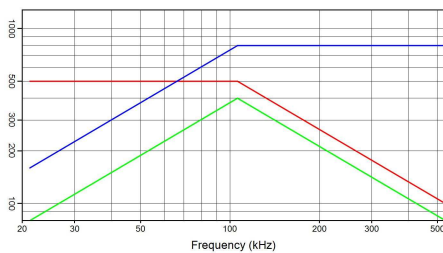

CSP 150/400 2.4 µF 500 V_{rms} 800 A_{rms} 400 kVA_r
 I(A) — Q(kVA_r) — V_{rms}

Celem Power Capacitors