


Features

- Low forward voltage drop
- High reverse voltage
- Hermetic metal cases with ceramic insulators

Typical Applications

- All purpose high power rectifier diodes
- High power resistance welding equipment
- Non-controllable and half-controllable rectifiers
- Controlled rectifiers

$I_{F(AV)}$ **5400 A**
 V_{RRM} **200~400 V**
 I_{FSM} **55 kA**
 I^2t **15125 10³A²S**

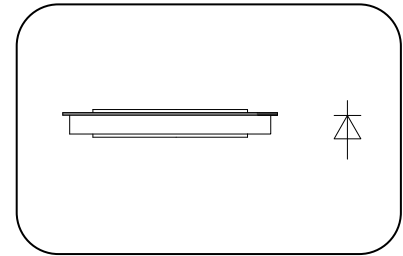

SYMBOL	CHARACTERISTIC	TEST CONDITIONS	T _j (°C)	VALUE			UNIT
				Min	Type	Max	
I _{F(AV)}	Mean forward current	180° half sine wave 50Hz Double side cooled,	T _C =55°C			6360	A
			T _C =85°C			5400	
V _{RRM}	Repetitive peak reverse voltage	V _{RRM} tp=10ms V _{RSM} = V _{RRM} +100V	190	200		400	V
I _{R(RM)}	Repetitive peak current	V _{RM} = V _{RRM}	190			50	mA
I _{FSM}	Surge forward current	10ms half sine wave	190			55	kA
I ² t	I ² T for fusing coordination	V _R =0.6V _{RRM}				15125	A ² s*10 ³
V _{FO}	Threshold voltage		190			0.75	V
r _F	Forward slop resistance					0.052	mΩ
V _{FM}	Peak on-state voltage	I _{FM} =6400A, F=24kN	190			1.10	V
Q _{rr}	Recovery charge	I _{FM} =2000A, tp=2000μs, di/dt=-20A/μs, V _R =50V	190		3500		μC
R _{th(j-c)}	Thermal resistance Junction to case	At 180° sine double side cooled Clamping force 24.0kN				0.0135	°C /W
R _{th(c-h)}	Thermal resistance case to heat sink					0.0035	
F _m	Mounting force			19		26	kN
T _{stg}	Stored temperature			-40		190	°C
W _t	Weight				140		
Outline	ZT44T						

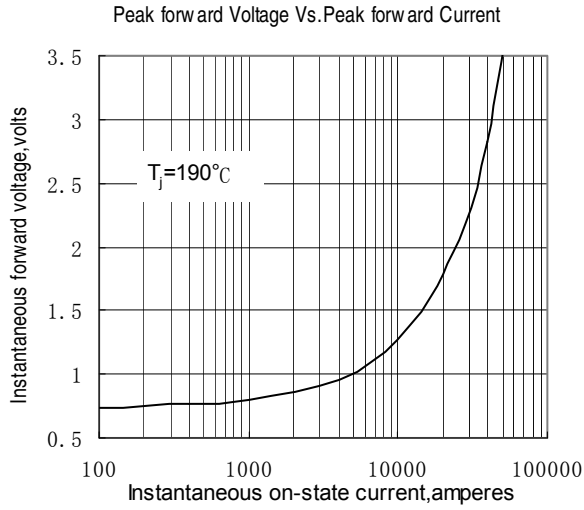


Fig.1

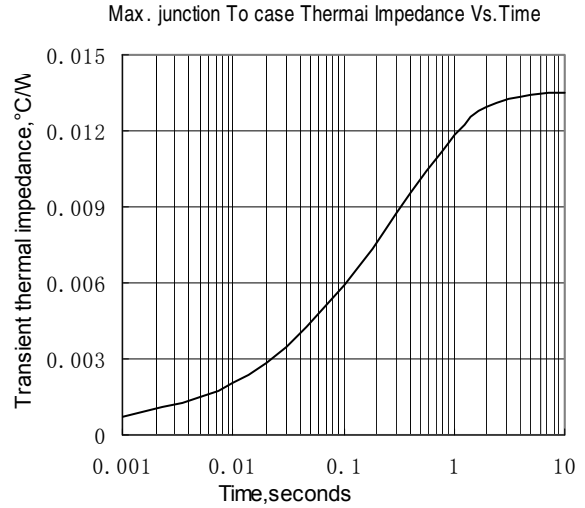


Fig.2

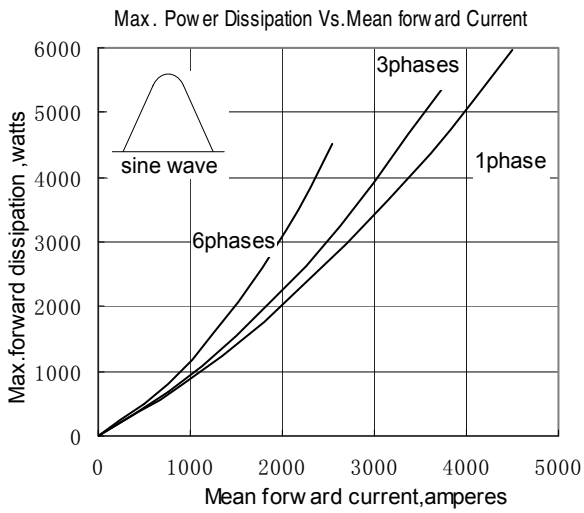


Fig.3

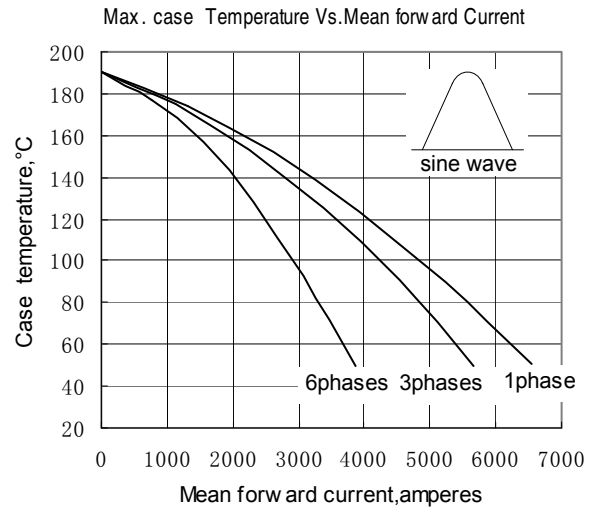


Fig.4

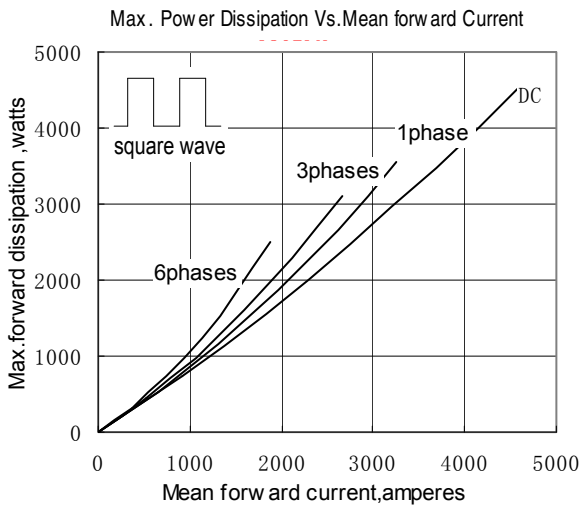


Fig.5

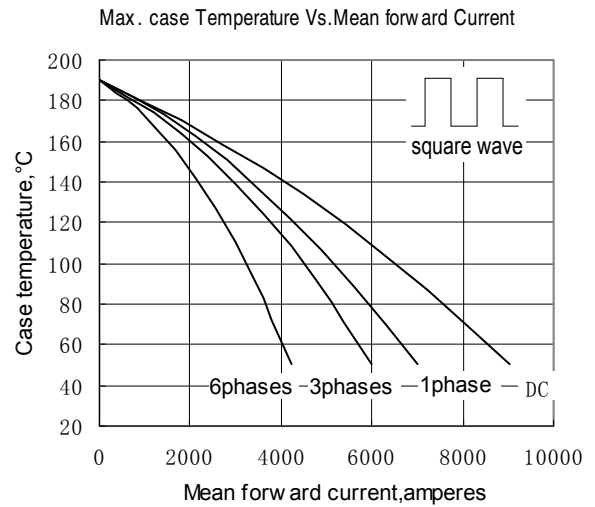


Fig.6

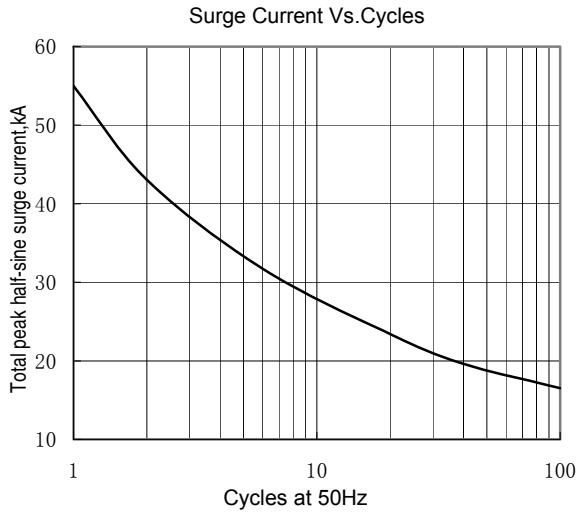


Fig.7

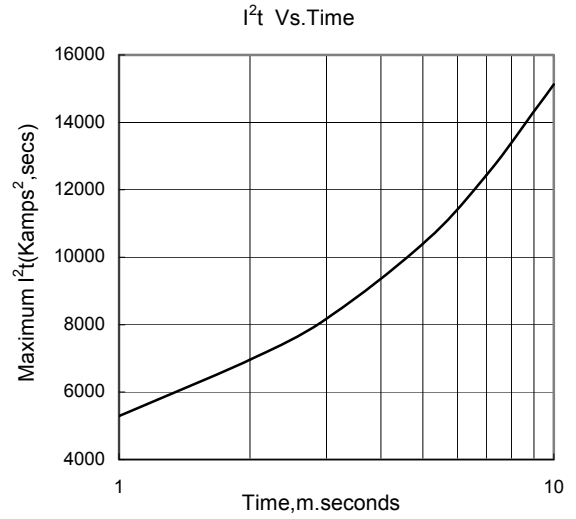


Fig.8

Outline:

