

High Current Probes



High Current Kelvin Probe up to 150 A

1860C004

Centers (mm/mil)	25,0 / 984
Temperature	-40°C...+250°C
Current (Circular)	150 A
Current (Internal)	5,0 A
Resistance (internal/circular)	<1/20 mOhm

Spring Force Total (cN ±20%)



	Preload	Nominal Force
total	-	3150
Internal Contact	130	300
Circular Contact	1000	2850

Travel (mm)

	Nominal	Maximum
Internal Contact	2,8	3,5
Circular Contact	5,6	7,0
Wrench Size	19	
Thread	10	

Materials and Plating

Internal Contact	BeCu, gold plated
Circular Contact	Brass, gold plated
Barrel	Brass, unplated
Spring Internal Contact	unplated, Stainless steel
Spring Circular Contact	Stainless steel, unplated

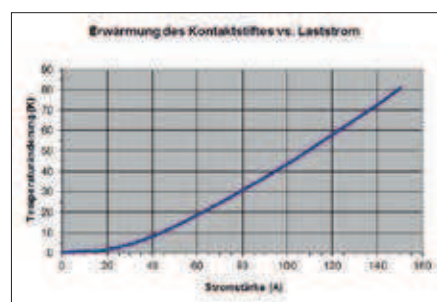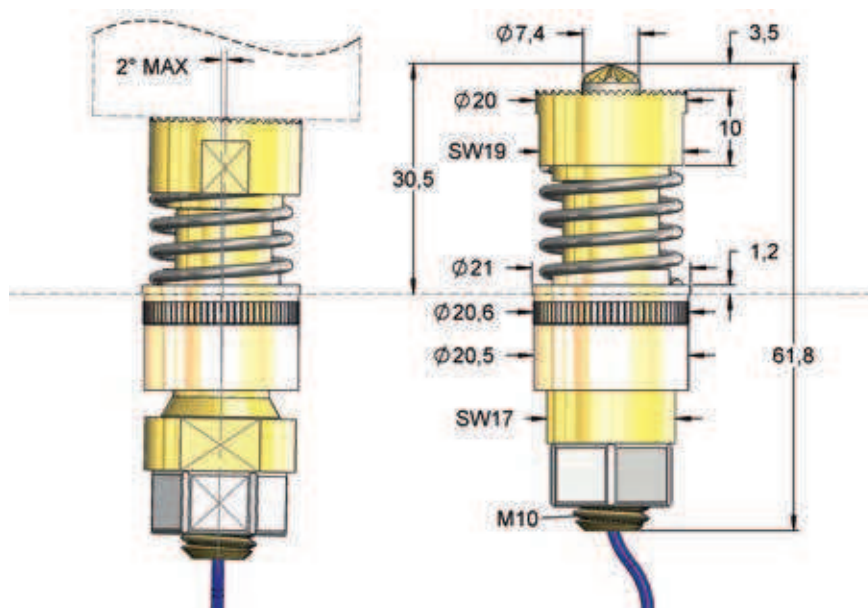

Tip Style	Number	Material	Plating	Ø in mm	Version
	07	B	G	7,4	C