

High Current Probes



High Current Probe up to 50 A

1860C005

NEU

| | |
|------------------|----------------|
| Centers (mm/mil) | 11,0 / 433 |
| Current | 50,0 A |
| Temperature | -40°C...+250°C |
| R typically | <6 mOhm |

Spring Force (cN ±20%)


| Preload | Nominal Force |
|---------|---------------|
| 200 | 530 |

Travel (mm)


| Nominal | Maximum |
|-------------------|---------|
| 5,0 | 7,0 |
| Thread (M) | 3,0 |
| Wrench Size | 9,0 |
| Pointing Accuracy | ±0,1 mm |

Materials and Plating

| | |
|---------|---------------------------|
| Plunger | see Tip Style |
| Barrel | Brass, unplated |
| Spring | Stainless steel, unplated |

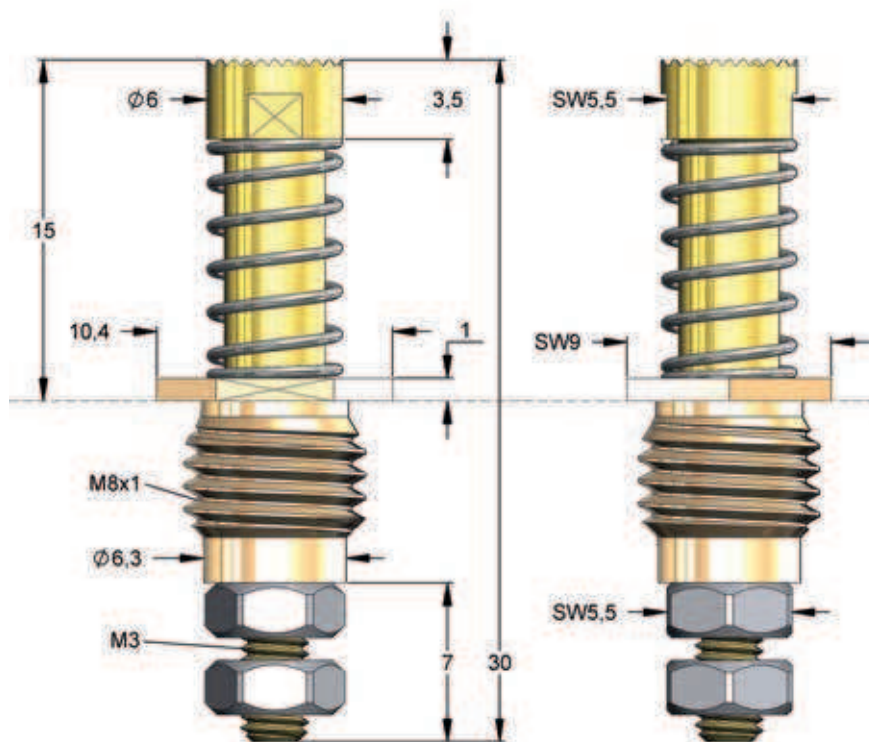

Robust designed high current probe with continuous plunger.

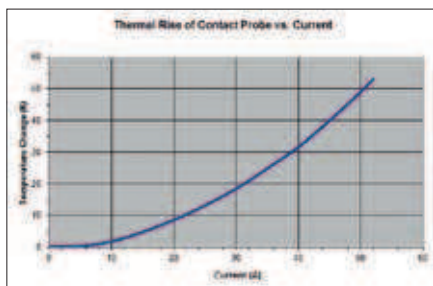

| Tip Style | Number | Material | Plating | Ø in mm | Version |
|---|--------|----------|---------|---------|---------|
|  | 06 | B | G | 6,0 | C |