



Interface Probe for Teradyne
F150

Centers (mm/mil)	2,54 / 100
Current	5,0 A
Temperature	-20°C...+80°C
R typically	20 mOhm

Spring Force (cN ±20%)

Preload	Nominal Force
50	100

Travel (mm)

Nominal	Maximum
4,5	8,0
Pointing Accuracy	±0,08 mm

Materials and Plating


Plunger	see Tip Style
Barrel	Bronze, gold plated
Spring	Music wire, silver plated

Drill Size [mm]

F150	1,62 -1,65
------	------------

Projection Height

F150...	20,5
---------	------

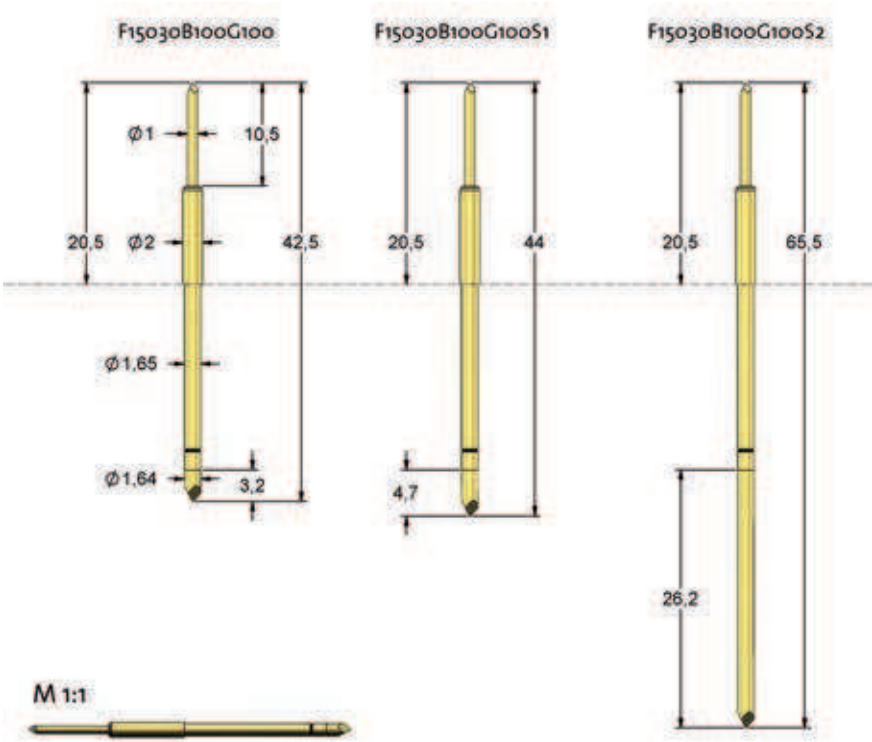

Type	Tip-Ø	Spring Force
F 150 30 B 100 G 100 S2		
Tip Style	Material	Finish
Material:	B = BeCu	
Tip-Ø:	100 = 1,0 mm (e.g.)	
Finish:	G = Gold	
Special Version:	S1/S2 = different Length of Contact end	
ORDER EXAMPLE		

Tip Style	Number	Material	Plating	Ø in mm	Version
	30	B	G	1,0	-