

Interface Probe  
for ATG Luther & Maelzer

F262

Centers (mm/mil)	1,50 / 59
Current	2,0 A
Temperature	-20°C...+80°C
R typically	100 mOhm

Spring Force (cN ±20%)

Preload	Nominal Force
0	140

Travel (mm)


Nominal	Maximum
5,0	7,0
Pointing Accuracy	±0,08 mm

Materials and Plating

Plunger	see Tip Style
Barrel	Nickel silver, unplated
Spring	Music wire, silver plated


Drill Size [mm]

F262	1,1
------	-----

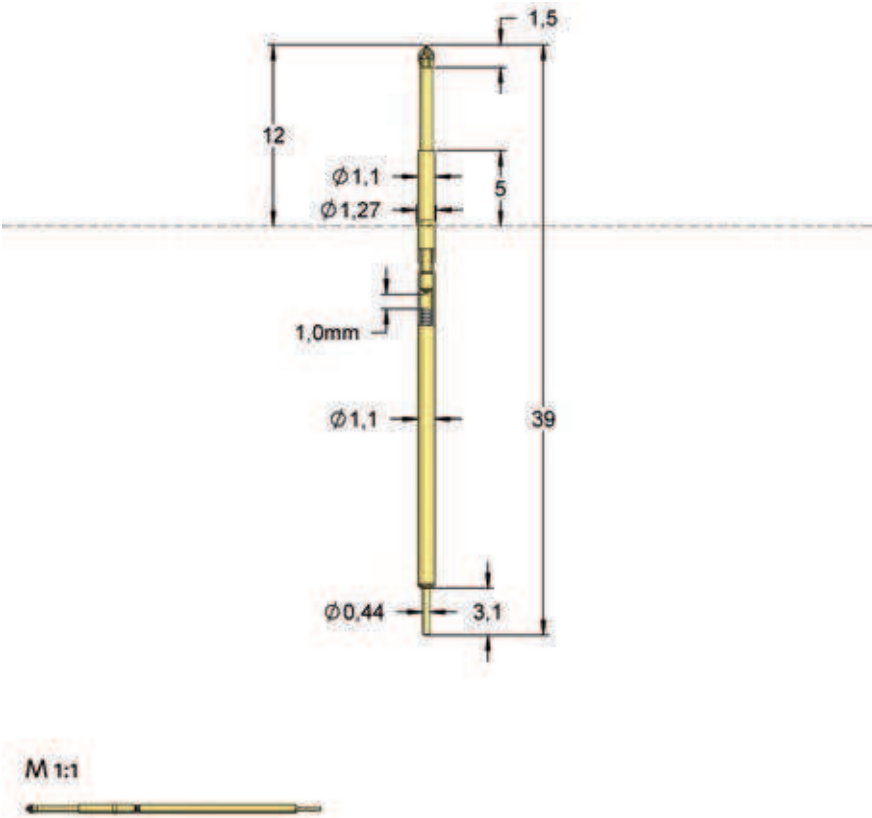

Probe F262 is mainly used at the basic grid field of bare board testers.

Type	Tip-Ø		Spring Force	
F 262 07	S	100	L	140
Tip Style	Material	Finish	Special Version	
Material:	S = Steel			
Tip-Ø:	100 = 1,0 mm (e.g.)			
Finish:	L = Longtime Gold plated, N = Nickel			
ORDER EXAMPLE				

Tip Style	Number	Material	Plating	Ø in mm	Version
	07	S	L	1,00	-