

Probe 75 mil
Short Version
F701

Centers (mm/mil)	1,90 / 75
Current	4,0 A
Temperature	-20°C...+80°C
R typically	20 mOhm

Spring Force (cN ±20%)

Preload	Nominal Force
40	70
30	150

Travel (mm)

Nominal	Maximum
4,0	5,0
Pointing Accuracy	±0,1 mm

Materials and Plating

Plunger	see Tip Style
Barrel	Bronze, gold plated
Spring	Music wire, silver plated
Receptable	Bronze, Gold plated

Accessories


Insertion tool receptacle	FEWZ-075EV
Insertion tool receptacle	FEWZ-075E0
Insertion tool probe	FDWZ-075
Plug lock	H075VS

Drill Size [mm]

H701...	1,31 - 1,32
---------	-------------

Projection Height

H701CR / LA	12,5
H701WW	12,7

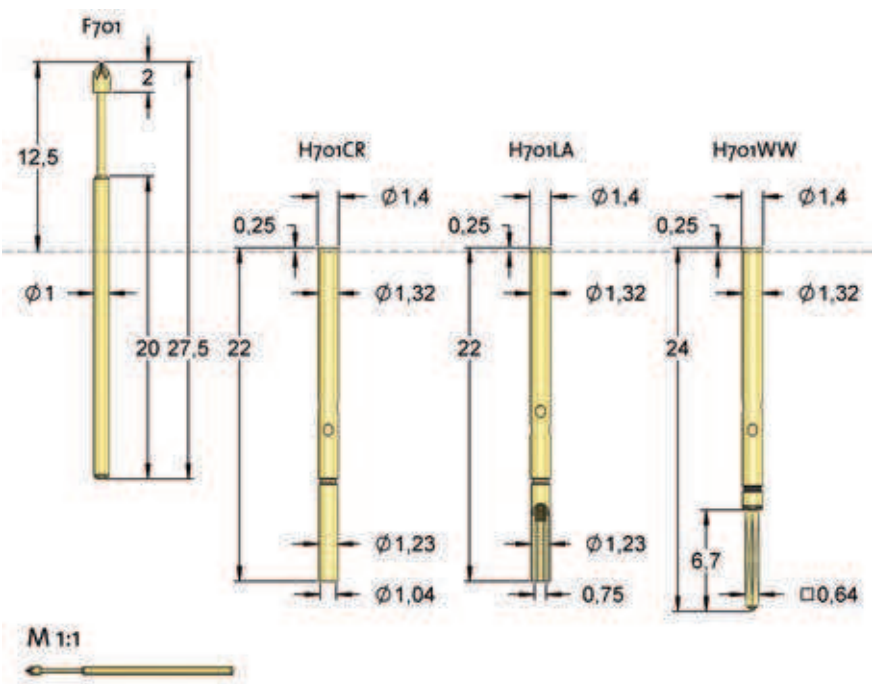

Type	Tip-Ø	Spring Force
F 701 11 B 050 G 150		
Tip Style	Material	Finish Special Version
Material:	B = BeCu, S = Steel	
Tip-Ø:	050 = 0,5 mm (e.g.)	
Finish:	G = Gold, L = Longtime Gold plated	
Receptacle:	Order Code according drawing	
ORDER EXAMPLE		

Tip Style	Number	Material	Plating	Ø in mm	Version
	06	B	G	1,15	-
	07	S	L	1,15	-
	11	B	G	0,5	-
	14	S	L	1,15	-
	15	B	G	1,3	-
	18	B	G	0,5	-
	21	S	L	0,5	-