



Battery Contact

F702

Centers (mm/mil)	3,00 / 118
Current	8,0 A
Temperature	-40°C...+250°C
R typically	15 mOhm

Spring Force (cN ±20%)

Preload	Nominal Force
10	15
10	30
40	130

Travel (mm)

Nominal	Maximum
1,5	2,2
Pointing Accuracy	±0,08 mm

Materials and Plating

Plunger	see Tip Style
Barrel	Brass, gold plated
Spring	Stainless steel, unplated
Receptacle	Bronze, Gold plated

Accessories


Insertion tool receptacle	FEWZ-563E0
---------------------------	------------

Drill Size [mm]

H702...	2,28 - 2,29
---------	-------------

Projection Height

H702...	3,7
---------	-----

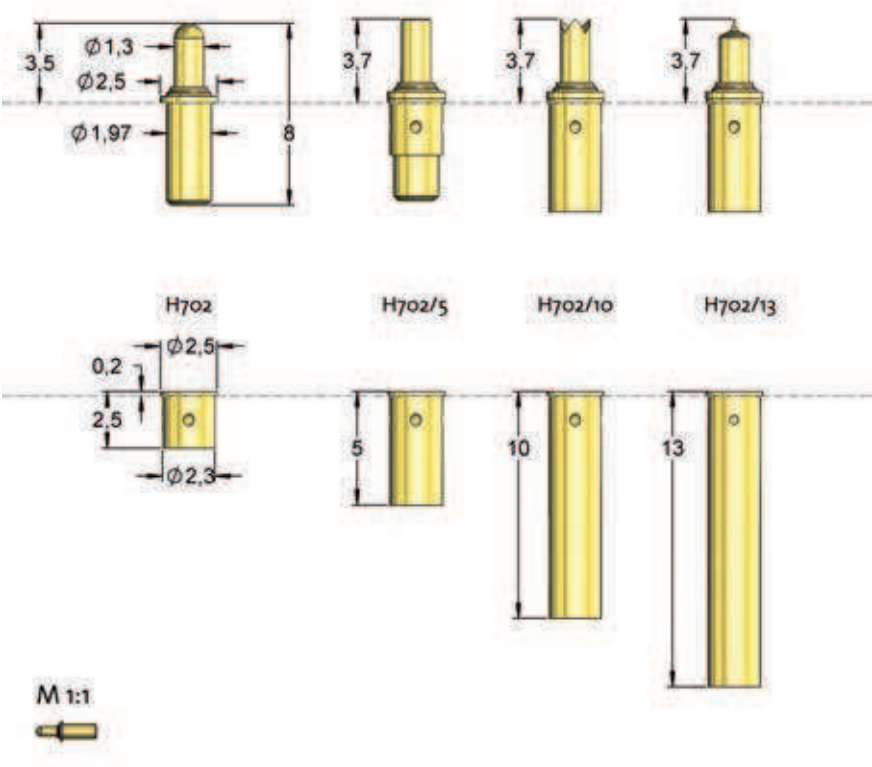

Type	Tip-Ø	Spring Force
F 702 11 B 130 G 130		
Tip Style	Material	Finish Special Version
Material:	B = BeCu, S = Steel	
Tip-Ø:	130 = 1,3 mm (e.g.)	
Finish:	G = Gold, L = Longtime Gold plated	
Receptacle:	Order Code according drawing	
ORDER EXAMPLE		

Tip Style	Number	Material	Plating	Ø in mm	Version
	11	B	G	1,3	-
	16	B	G	1,3	-
	29	B	G	1,3	-
	34	S	L	1,3	-