

Probe 75 mil
F703

Centers (mm/mil)	1,90 / 75
Current	4,0 A
Temperature	-20°C...+80°C
R typically	20 mOhm

Spring Force (cN ±20%)

Preload	Nominal Force
30	60
50	100
70	150

Travel (mm)

Nominal	Maximum
4,3	6,4
Pointing Accuracy	±0,08 mm

Materials and Plating

Plunger	see Tip Style
Barrel	Nickel silver, gold plated
Spring	Music wire, silver plated
Receptable	Nickel silver, Gold plated

Accessories

Insertion tool receptacle	FEWZ-075EV
Insertion tool receptacle	FEWZ-075E0
Insertion tool probe	FDWZ-075
Plug lock	H075VS


Drill Size [mm]

Press ring as stop	1,29 - 1,30
Press ring inserted	1,36 - 1,40

Projection Height

H075.../10.0	8,4 - 18,4
H075.../7.6	8,4 - 16,0
H075.../2.0	8,4 - 10,4
H075WW10/2.0S1	11,6 - 13,6
H075WW10/2.0S2	16,4 - 18,4

Type	Tip-Ø	Spring Force
F 703 21 S 078 L 100		
Tip Style	Material	Finish
Material:	B = BeCu, S = Steel	
Tip-Ø:	078 = 0,78 mm (e.g.)	
Finish:	G = Gold, L = Longtime Gold plated	
Receptacle:	Order Code according drawing	
ORDER EXAMPLE		

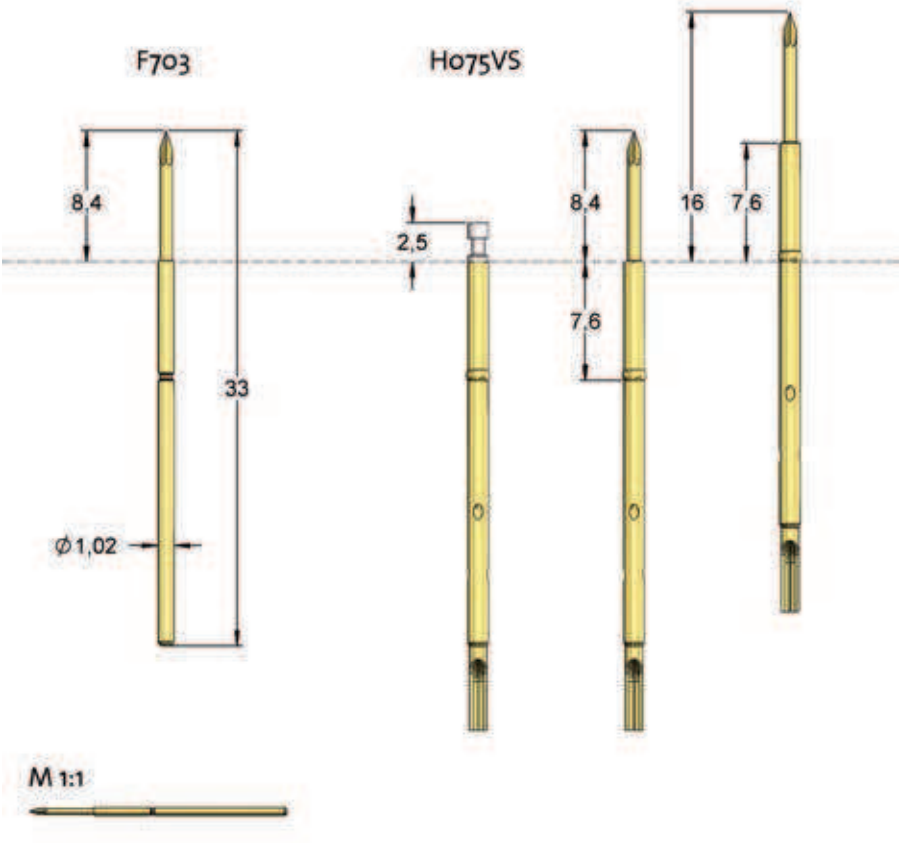

Further receptacles see „Receptacles H075“.

Tip Style	Number	Material	Plating	Ø in mm	Version
	18	B	G	0,78	-
	21	S	L	0,78	-



Receptacles for 75 mil centers

H075

For probes F075, F793 and F703 different receptacles are available with different connection types (e.g. LA, CR, WW), different press ring positions and different wire-wrap posts. Adequate insertion tools are available. The right tool for flush insertion is **FEWZ-703E0**. The tools for fix projection heights are **FEWZ-075Exx**. For variable projection heights the tool **FEWZ-075EV** is appropriate.

Plug locks **H075VS** can be used to close empty receptacles in order to prevent false assemblies and to avoid contamination.

A special receptacle with spring loaded contact pin (**H075WL11/7.6**) enables wireless contacting of conductor paths. Additionally a receptacle with preassembled wire AWG26 is available as H075LI/7.6.

H075WW10/2.0S2

H075WW10/2.0S1

H075WW10/2.0

H075CR/2.0

H075LA/2.0

H075CR/7.6


H075LA/7.6

H075WW10/7.6

H075WW19/7.6

H075CR/10.0

H075WW10/10.0

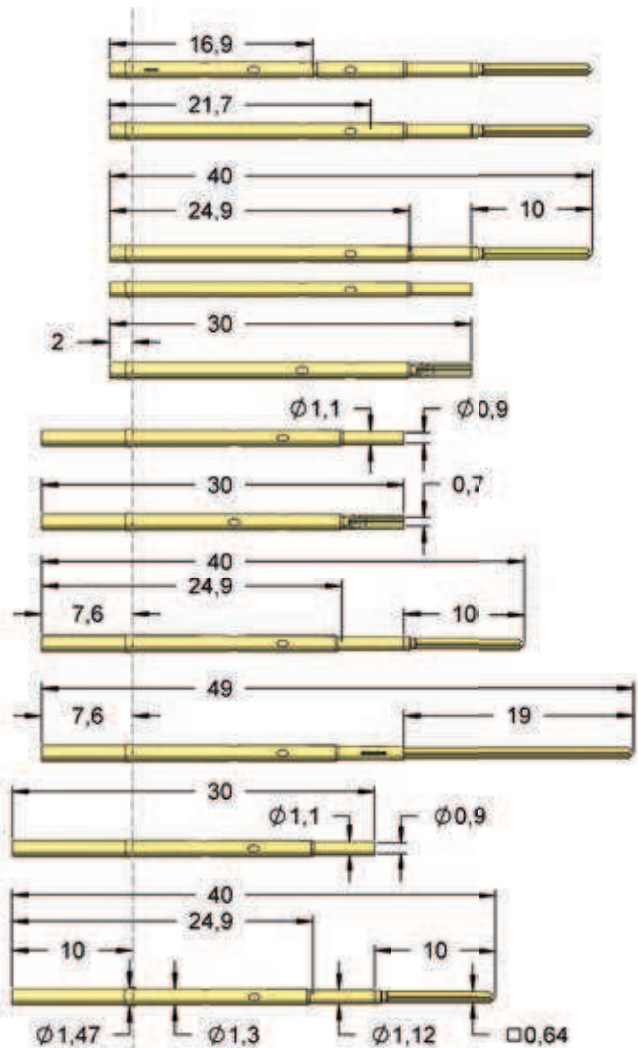

Material and Plating


Nickel silver, gold plated

Drill Size [mm]

Press ring as stop	1,29 - 1,30
Press ring inserted	1,36 - 1,40

Appropriate tools are available for each type of receptacle.

Please note: Carrier plates need to have a certain thickness to hold receptacles tight.

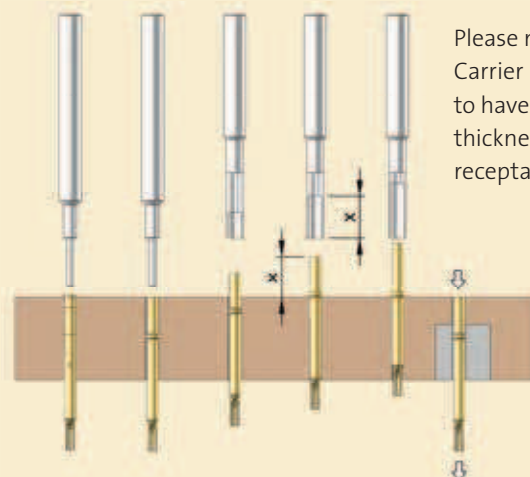

Type	Length of Wire Wrap Pin
H075	WW 10 / 7.6
Connection Type	Press Ring Position
Connection Type:	CR = Crimp connection LA = Solder connection WW = Wire Wrap connection LI = Stranded wire WL = Spring loaded connection
Length of Wire Wrap Pin:	e.g. 10 = 10,0mm
Press Ring Position:	e.g. 7.6 = 7,6mm
ORDER EXAMPLE	

Projection Height

	H075.../10.0	H075.../7.6	H075.../2.0	H075WW10/2.0S1	H075WW10/2.0S2
F075 / F703	8,4 - 18,4	8,4 - 16,0	8,4 - 10,4	11,6 - 13,6	16,4 - 18,4
F075...L / F703...L	10,4 - 20,4	10,4 - 18,0	10,4 - 12,4	13,6 - 15,6	18,4 - 20,4
F793	12,0 - 22,0	12,0 - 19,6	12,0 - 14,0	15,2 - 17,2	20,0 - 22,0
F793...L	14,0 - 24,0	14,0 - 21,6	14,0 - 16,0	17,2 - 19,2	22,0 - 24,0