



Battery Contact

F704 NEW

Centers (mm/mil)	2,20 / 87
Current	8,0 A
Temperature	-40°C...+250°C
R typically	20 mOhm

Spring Force (cN ±20%)

Preload	Nominal Force
20	60

Travel (mm)

Nominal	Maximum
1,5	2,2
Pointing Accuracy	±0,08 mm

Materials and Plating


Plunger	see Tip Style
Barrel	Brass, gold plated
Spring	Stainless steel, unplated
Receptacle	Bronze, Gold plated

Drill Size [mm]

H708...	1,54 - 1,55
---------	-------------

Projection Height

H708...	3,7
---------	-----

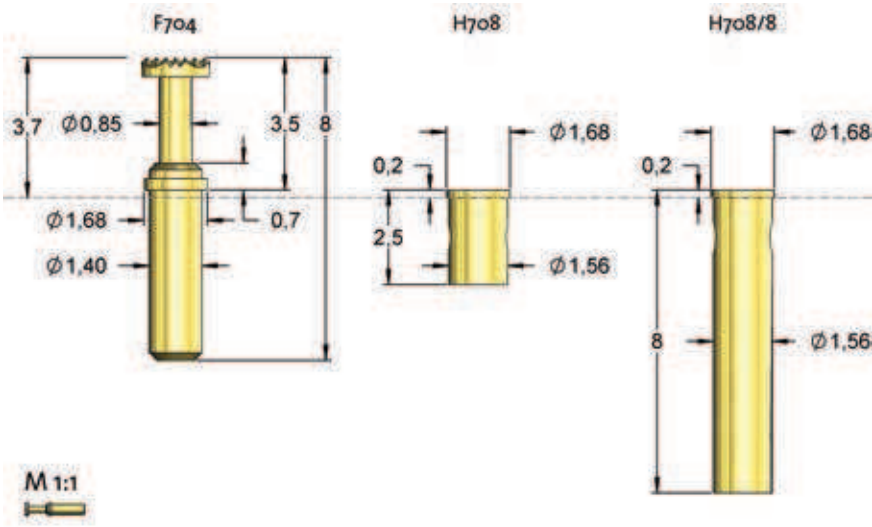

Type	Tip-Ø	Spring Force
F 704 06	B 180	G 060
Tip Style	Material	Finish
Material:	B = BeCu	
Tip-Ø:	180 = 1,8 mm (e.g.)	
Finish:	G = Gold	
Receptacle:	Order Code according drawing	
ORDER EXAMPLE		

Tip Style	Number	Material	Plating	Ø in mm	Version
	06	B	G	1,8	-