

Battery Contact

F708

Centers (mm/mil)	2,20 / 87
Current	8,0 A
Temperature	-40°C...+250°C
R typically	20 mOhm

Spring Force (cN ±20%)

Preload	Nominal Force
25	100

Travel (mm)

Nominal	Maximum
1,0	1,2
Pointing Accuracy	±0,08 mm

Materials and Plating


Plunger	see Tip Style
Barrel	Brass, gold plated
Spring	Stainless steel, unplated
Receptacle	Bronze, Gold plated

Drill Size [mm]

H708...	1,54 - 1,55
---------	-------------

Projection Height

H708...	3,0
---------	-----

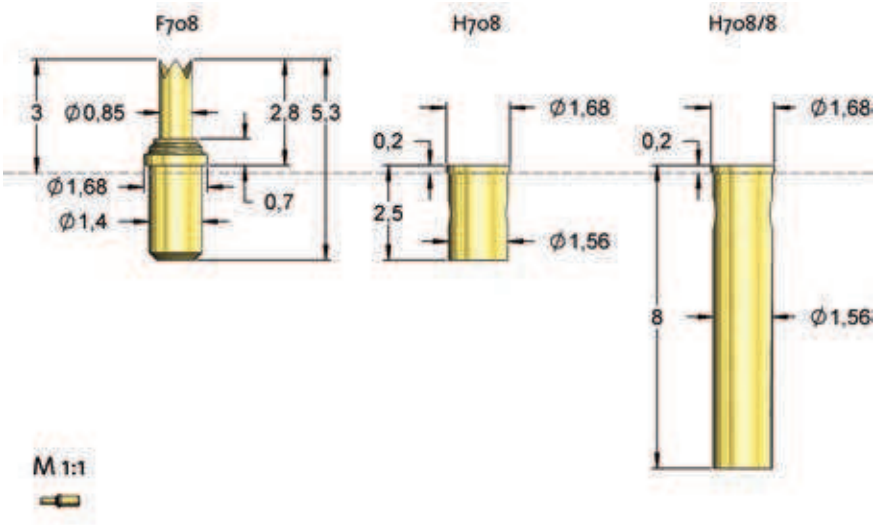

Type	Tip-Ø	Spring Force
F 708 11 B 085 G 080		
Tip Style	Material	Finish Special Version
Material:	B = BeCu, S = Steel	
Tip-Ø:	085 = 0,85 mm (e.g.)	
Finish:	G = Gold, L = Longtime Gold plated	
Receptacle:	Order Code according drawing	
ORDER EXAMPLE		

Tip Style	Number	Material	Plating	Ø in mm	Version
	03	S	L	0,85	-
	11	B	G	0,85	-
	16	B	G	0,85	-
	29	B	G	0,85	-