

Threaded Probes

Threaded Short Travel Probe 100 mil

F722

Centers (mm/mil)	2,54 / 100
Current	5,0 A
Temperature	-20°C...+80°C
R typically	25 mOhm

Spring Force (cN ±20%)

Preload	Nominal Force
40	100

Travel (mm)

Nominal	Maximum
1,5	2,2
Thread (M)	1,6x0,2
Wrench Size	1,7
Pointing Accuracy	±0,08 mm

Materials and Plating

Plunger	see Tip Style
Barrel	BeCu, gold plated
Spring	Music wire, silver plated
Receptacle	Brass, Gold plated

Accessories


Screw-in tool probe	FWZ732 (T)
---------------------	------------

Drill Size [mm]

H722...	1,99 - 2,00
---------	-------------

Projection Height

H722...	4,5
---------	-----

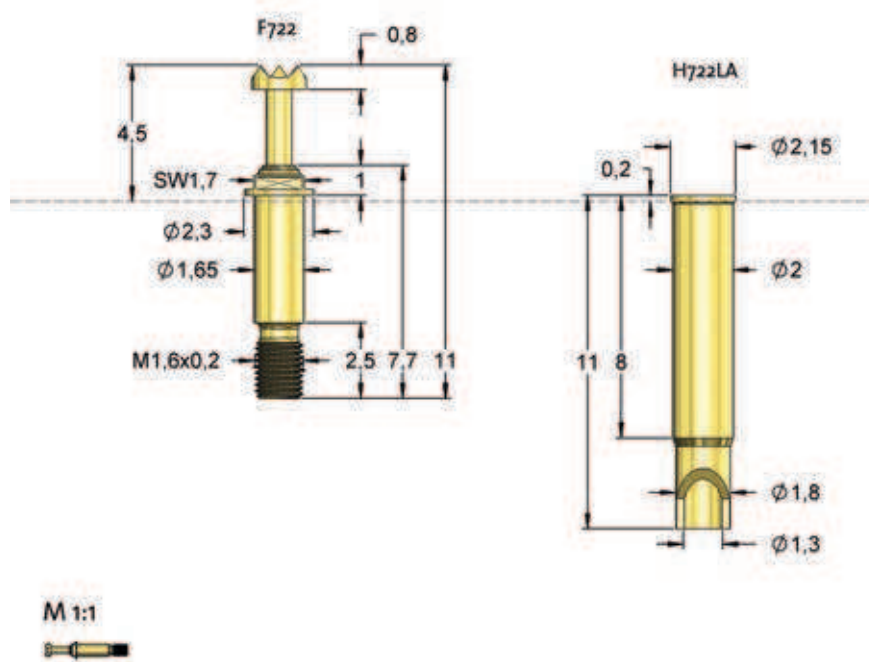

Type	Tip-Ø	Spring Force
F 722 06 B 180 G 100		
Tip Style	Material	Finish
Material:	B = BeCu	
Tip-Ø:	180 = 1,8 mm (e.g.)	
Finish:	G = Gold	
Receptacle:	Order Code according drawing	
ORDER EXAMPLE		

Tip Style	Number	Material	Plating	Ø in mm	Version
	05	B	G	1,8	-
	06	B	G	1,8	-
	11	B	G	0,64	-
	11	B	G	0,85	-
	17	B	G	1,8	-