

Threaded Probes



Threaded Short Travel Probe 157 mil

F723

Centers (mm/mil)	4,00 / 157
Current	10,0 A
Temperature	-40°C...+250°C
R typically	15 mOhm

Spring Force (cN ±20%)

Preload	Nominal Force
40	80
70	150

Travel (mm)

Nominal	Maximum
2,8	3,5
Thread (M)	2,0
Wrench Size	3,0
Pointing Accuracy	±0,1 mm

Materials and Plating

Plunger	see Tip Style
Barrel	Brass, gold plated
Spring	Stainless steel, unplated
Receptacle	Brass, Gold plated

Accessories


Screw-in tool probe	FWZ733S1 (T1)
---------------------	---------------

Drill Size [mm]

H723...	2,98 - 2,99
---------	-------------

Projection Height

H723...	7,3
---------	-----

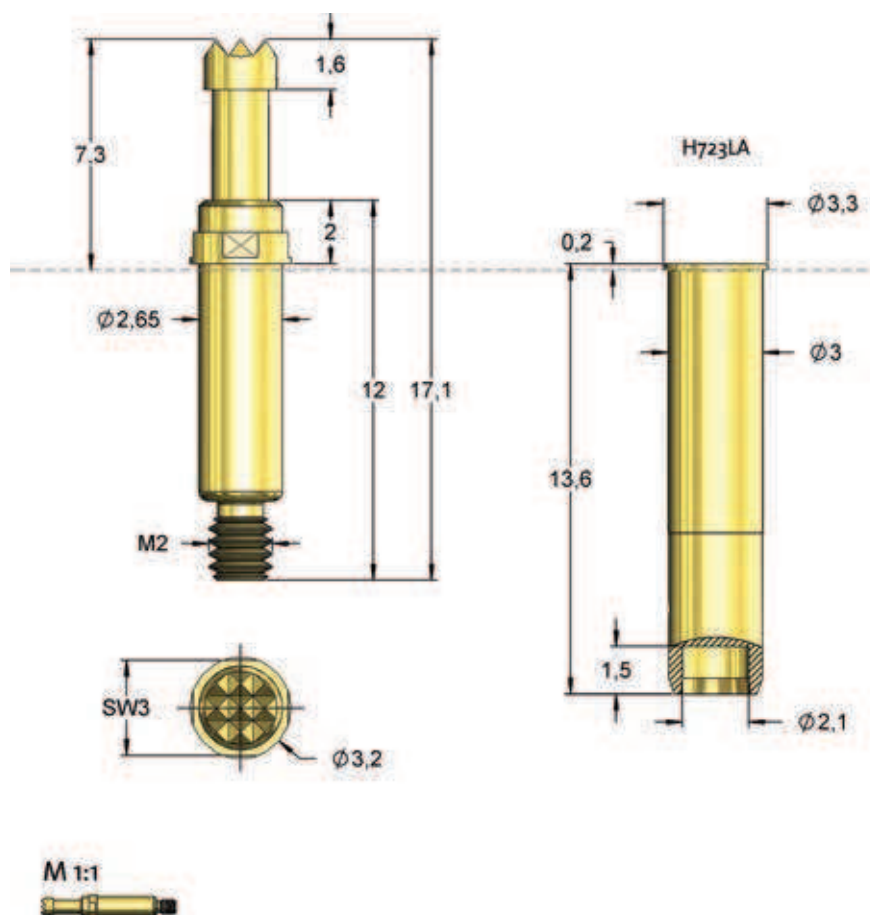

Compatible plug-in version can be found at F713.

Type	Tip-Ø	Spring Force
F 723 12 B 230 G 080		
Tip Style	Material	Finish Special Version
Material:	B = BeCu	
Tip-Ø:	230 = 2,3 mm (e.g.)	
Finish:	G = Gold	
Receptacle:	Order Code according drawing	
ORDER EXAMPLE		

Tip Style	Number	Material	Plating	Ø in mm	Version
	02	B	G	2,3	-
	06	B	G	2,3	-
	12	B	G	2,3	-
	17	B	G	2,3	-