

High Current Probes

High Current Probe 138 mil Plug in

F773C

Centers (mm/mil)	3,50 / 138
Current	25,0 A
Temperature	-40°C...+250°C
R typically	<8 mOhm

Spring Force (cN ±20%)

Preload	Nominal Force
60	150
60	300

Travel (mm)

Nominal	Maximum
4,0	5,0
Pointing Accuracy	±0,1 mm

Materials and Plating

Plunger	see Tip Style
Barrel	Brass, gold plated
Spring	Stainless steel, unplated
Receptacle	Brass, Gold plated

Accessories



Insertion tool receptacle	FEWZ-774E0
---------------------------	------------

Drill Size [mm]

Receptacle without knurl	2,98-2,99
--------------------------	-----------

Projection Height

H773LA	10,5
--------	------

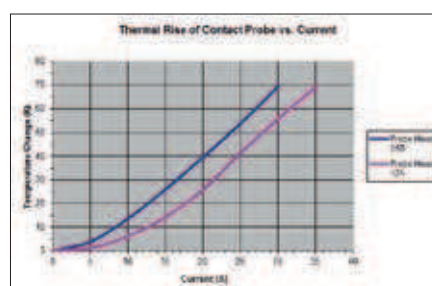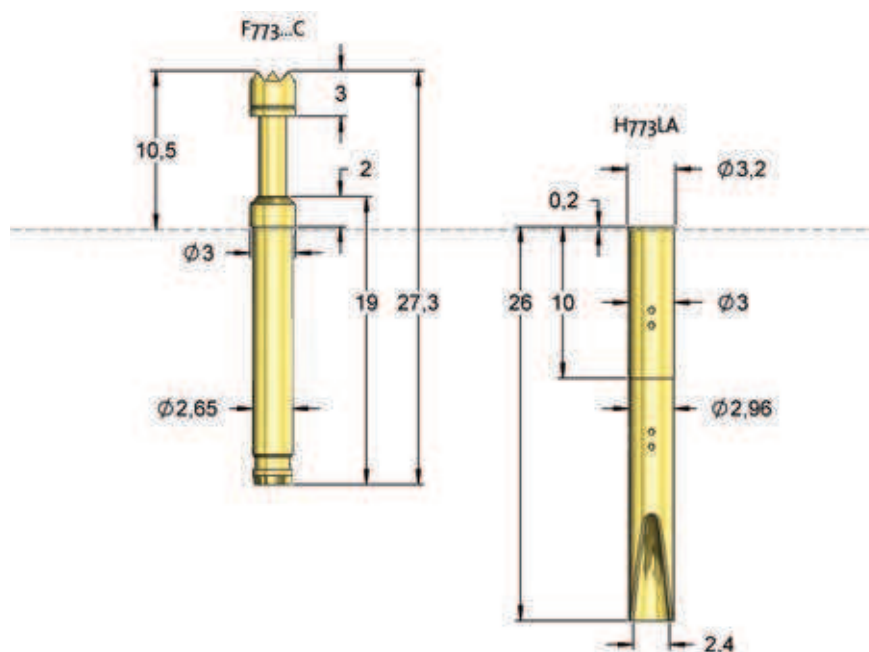

Type	Tip-Ø	Spring Force
F 773 06 B 400 G 300 C		
Tip Style	Material	Finish
Material:	B = BeCu, A = AgNi (Silver alloy)	
Tip-Ø:	400 = 4,0 mm (e.g.)	
Finish:	G = Gold, U = Unplated	
Special Version:	C = High Current Version	
Receptacle:	Order Code according drawing	

ORDER EXAMPLE

Tip Style	Number	Material	Plating	Ø in mm	Version
	06	B	G	2,3	C
	06	B	G	3,0	C
	06	B	G	4,0	C
	07	B	G	3,0	C
	11	B	G	1,4	C
	12	B	G	2,3	C
	17	B	G	4,0	C