

Kelvin Probe 87 mil Plug-in F805

NEW

Centers (mm/mil)	2,20 / 87
Temperature	-20°C...+80°C
Current (Circular)	2,5 A
Current (Internal)	0,5 A

Spring Force Total (cN ±20%)

	Preload	Nominal Force
total	-	250
Internal Contact	10	50
Circular Contact	80	200

Travel (mm)

	Nominal	Maximum
Internal Contact	2,0	2,5
Circular Contact	2,0	2,5

Materials and Plating

Internal Contact	BeCu, gold plated
Circular Contact	BeCu, gold plated
Barrel	Bronze, gold plated
Spring Internal Contact	gold plated, Music wire
Spring Circular Contact	Stainless steel, unplated
Receptable	Bronze, gold plated

Accessories


Insertion tool receptacle	FEWZ-100E0
---------------------------	------------

Projection Height (mm)

H805KBLA	4,2
----------	-----

Drill Size (mm)

H805KBLA	1,68 - 1,70
----------	-------------

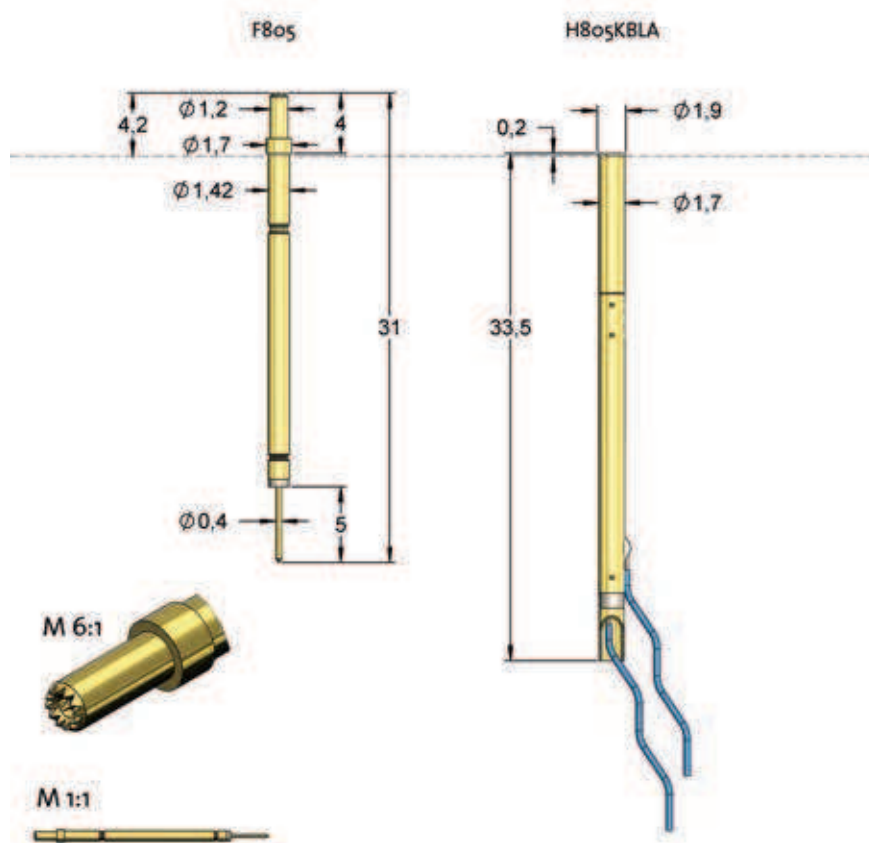

Type	number		Spring Force	
F 805	18	B	0001	G 250
Tip Style	Material	Finish	Special Version	
Material:	B = BeCu			
number:	see table			
Finish:	G = Gold			
Receptacle:	Order Code according drawing			
ORDER EXAMPLE				

Tip Style	Number	Material	Plating	Ø in mm	Version
	18	B	G	1,18	-