

Short Switch Probe 100 mil Closer (NO)

F879

NEW

Centers (mm/mil)	2,54 / 100
Current	3,0 A
Current (Switch)	1,0 A
Temperature	-20°C...+80°C
R typically	65 mOhm

Spring Force (cN ±20%)

Preload	Nominal Force
50	200

Travel (mm)

Nominal	Maximum
4,0	5,0
Switch Travel (mm)	2,6
Thread (M)	2,0x0,25
Wrench Size	1,7
Pointing Accuracy	±0,08 mm

Materials and Plating


Plunger	see Tip Style
Barrel	Brass, gold plated
Spring	Music wire, silver plated
Receptacle	Brass, Gold plated

Accessories

Insertion tool receptacle	FEWZ-772E0
Screw-in tool probe	FWZ732 (T)

Projection Height

H879...	9,2
---------	-----

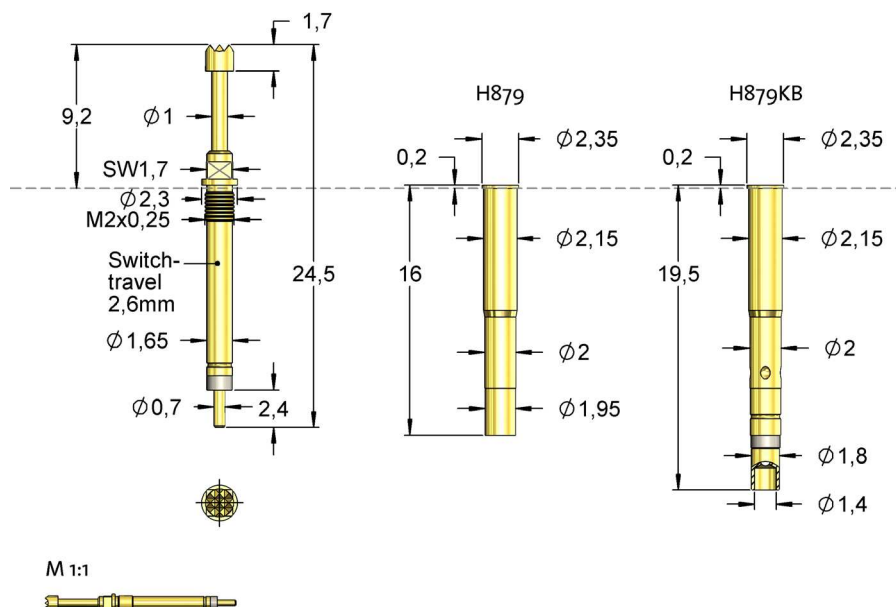

Type	Tip-Ø	Spring Force	
F 879 06	B 180	G 200	
Tip Style	Material	Finish	Special Version
Material:	B = BeCu, K = Syntetic, T = insulated BeCu-Head nickel plated		
Tip-Ø:	180 = 1,8 mm (e.g.)		
Finish:	G = Gold, N = Nickel, U = Unplated		
Receptacle:	Order Code according drawing		
ORDER EXAMPLE			

Tip Style	Number	Material	Plating	Ø in mm	Version
	06	B	G	1,8	-
	11	B	G	1,0	-
	16	B	G	1,0	-
	17	B	G	1,8	-
	17	T	N	2,0	-