

Short Switch Probe 157mil
Closer (NO)

F887

Centers (mm/mil)	4,00 / 157
Current	10,0 A
Current (Switch)	1,0 A
Temperature	-20°C...+80°C
R typically	40 mOhm

Spring Force (cN ±20%)

Preload	Nominal Force
50	150
50	200
50	300

Travel (mm)

Nominal	Maximum
4,0	5,0
Switch Travel (mm)	1,7
Thread (M)	3,0x0,35
Wrench Size	2,5
Pointing Accuracy	±0,1 mm

Materials and Plating

Plunger	see Tip Style
Barrel	BeCu, gold plated
Spring	Music wire, silver plated
Receptacle	Brass, Gold plated

Accessories


Insertion tool receptacle	FEWZ-340E0
Screw-in tool probe	FWZVF4 (T)

Drill Size [mm]

Receptacle with knurl	3,50 - 3,52
-----------------------	-------------

Projection Height

H887...	9,2
---------	-----

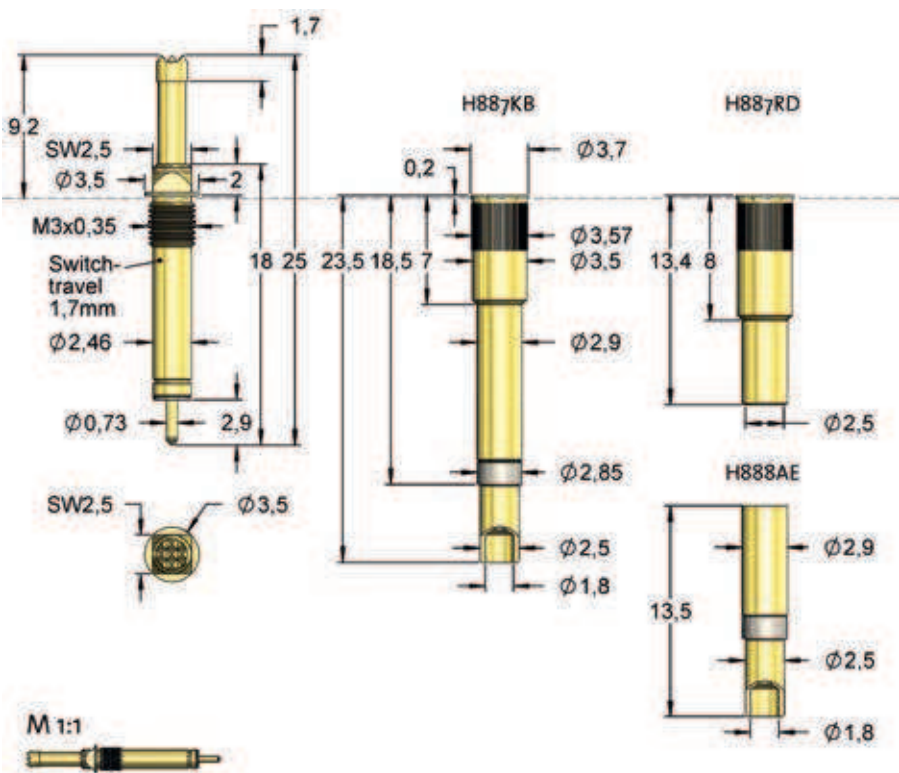

Type	Tip-Ø	Spring Force
F 887 06 B 300 G 150		
Tip Style	Material	Finish
Material:	B = BeCu	
Tip-Ø:	300 = 3,00 mm (e.g.)	
Finish:	G = Gold	
Receptacle:	Order Code according drawing	
ORDER EXAMPLE		

Tip Style	Number	Material	Plating	Ø in mm	Version
	06	B	G	1,0; 2,0; 3,0	-
	16	B	G	1,0	-
	17	B	G	2,0; 3,0	-