

Push Back Probes

Push Back Probe 157 mil Plug-in with Switch Function V04

Centers (mm/mil)	4,00 / 157
Current	8,0 A
Current (Switch)	1,0 A
Temperature	-20°C...+80°C
R typically	30 mOhm

Spring Force (cN ±20%)

Preload	Nominal Force
200	900
400	1500

Travel (mm)

Nominal	Maximum
9,5	10,0
Switch Travel (mm)	7,5
Wrench Size	2,5
Pointing Accuracy	±0,1 mm

Materials and Plating

Plunger	see Tip Style
Barrel	Brass, gold plated
Spring	Music wire, silver plated

Accessories


Screw-in tool	FWZVF4
---------------	--------

Drill Size [mm]

V04	2,98 - 2,99
-----	-------------

Projection Height

V04	40,5
-----	------

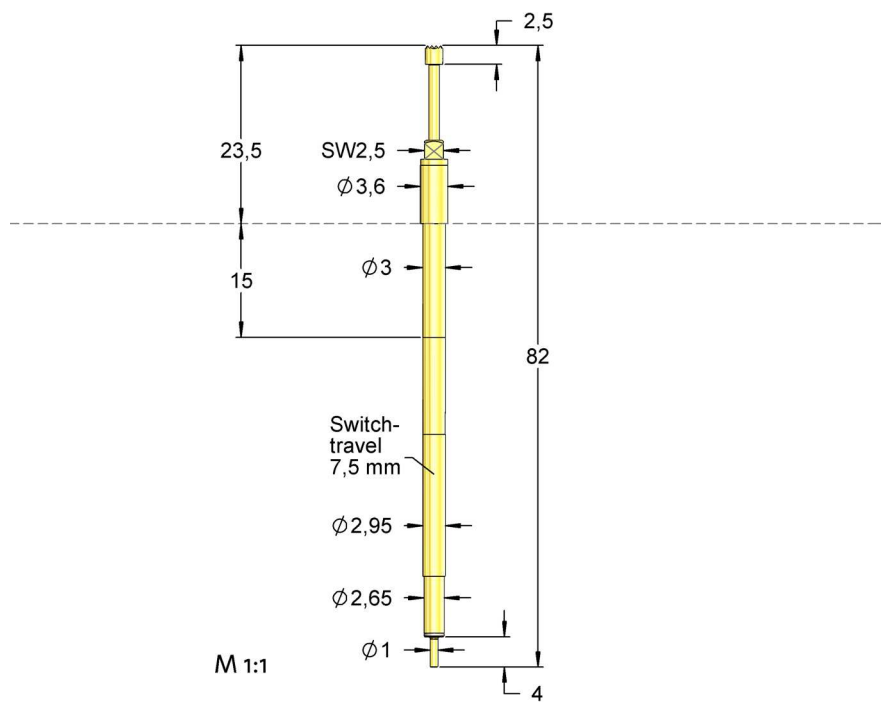

Type	Tip-Ø	Spring Force (N)
V04 17 B 180 G 15		
Tip Style	Material	Finish
Material:	B = BeCu	
Head-Ø:	180 = 1,8 mm (e.g.)	
Finish:	G = Gold	
ORDER EXAMPLE		

Tip Style	Number	Material	Plating	Ø in mm	Version
	06	B	G	1,8 / 2,3 / 3,0	-