

280 W open frame ACDC power supply




Description

This low cost ACDC power supply is designed for LED projection screens.

Specifications

- Product name: PSM280
- Input voltage range: 85..264 Vac
- Output voltage: -12 V / 24 A
- Efficiency at 230Vac: 92 %
- Inrush current: 30 A
- Holdup time: > 20 msec
- Input-output isolation: 3000 Vac
- MTBF: >300000 Hrs
- EMC: EN55011 class B
- Safety: EN60950
- Protections: Overcurrent, overvoltage, Temp.
- Temperature range: 0...50 °C; up to 70 °C derating 2.5 %/°C
- Dimensions: 164 x 120 x 46 mm

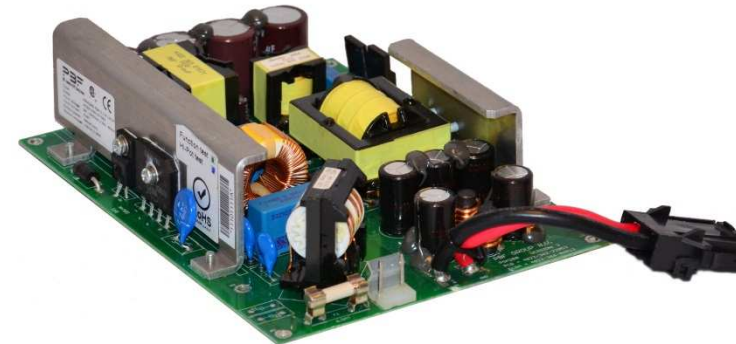

Applications

- Industrial applications