

# TopCon TC.GSS

Programmable Grid-tie Source – Sink  
Bidirectional High-Power DC Supply



TopCon GSS Power Supply unit with optional front panel control unit HMI

- TopCon Grid-tie Source Sink technology enables full bidirectional operation
- Compact design with integrated EMI - and Sine filters
- Constant voltage (0 – 100 %), constant current (0 – 100 %) and constant power operation (5 – 100%) with automatic and fast crossover and mode indication. Internal resistance simulation.
- Graduated product line: 65, 130, 200, 400, 500, 600V DC, higher Voltages with series connection up to 1500V<sub>DC</sub>. Power categories of 20 and 32 kW are available for each nominal output voltage.
- Optional extras and accessories complete the product line of power supply units.
- Modular concept for easy power increase: Parallel, series, matrix or multiloading master-slave-operation.
- High efficiency at a low cost, resulting from the application of innovative IGBT and transformer technology. Primary switched. Galvanic isolated. Full digital control and regulation.
- A user-friendly PC program, the operating and service software TopControl, enables the user to communicate with the power supply.
- TopControl installation file, LabVIEW® and C/C++ C#/ .NET API (DLL file) are included in the scope of delivery.
- CE conformity
- Swiss made: Developed, manufactured and tested in Switzerland by Regatron AG.

**Regatron AG**  
Kirchstrasse 11  
CH-9400 Rorschach  
Switzerland

Tel +41 71 846 67 67  
Fax +41 71 846 67 77  
www.regatron.com  
topcon@regatron.ch

# 20 kW / 130 VDC / 192 A

## Mains requirements and output specifications

### AC line

Line voltage.....3 x 360 – 440 VAC  
Line frequency ..... 48 – 62 Hz  
Mains connection type .....3L+PE (no neutral)  
Input current Q1 active mode..... 3 x 32 Arms<sup>1)</sup>  
Leakage current L to PE ..... < 20 mA  
Powerfactor Q1 active- / Q4-mode..... ≥ 0.99  
(At nominal power)

### DC-side ratings

Power range.....0 – +/- 20 kW  
Voltage range.....0 – 130 VDC  
Current range.....0 – +/- 192 A<sup>2)</sup>  
Internal resistance range ..... 0 – 1000 mΩ<sup>3)</sup>

### Operating modes

Q1 active mode..... source mode  
Q4 mode ..... regenerative/sink mode  
Voltage regulation (CV).....0 – 100 % U<sub>max</sub>  
Current regulation (CC).....0 ± 100 % I<sub>max</sub>  
Power regulation (CP)..... 0 ± 100 % P<sub>max</sub>

### Static accuracy

Load regulation CV, CC ..... < ± 0.1% FS<sup>4)</sup>  
Line regulation CV, CC ..... < ± 0.1% FS<sup>5)</sup>

### Transient response time

Load regulation ..... < 2 ms<sup>6)</sup>  
Set value tracking with quadrant change ..... < 4 ms<sup>7)</sup>  
Set value tracking without quadrant change ..... < 2 ms<sup>7)</sup>  
Quadrant change time ..... < 3 ms<sup>9)</sup>

### Stability

CV, CC ..... < ± 0.05% FS<sup>8)</sup>

### Temperature coefficient

CV ..... < 0.02 % FS / °C<sup>10)</sup>  
CC ..... < 0.03 % FS / °C<sup>10)</sup>

### DC-side ripple Q1 / Q4 Mode

≤ 300 Hz V<sub>pp</sub> ..... < 0.5% FS<sup>11)</sup>  
≤ 300 Hz V<sub>rms</sub> ..... < 0.1% FS<sup>11)</sup>

### DC-side noise Q1 / Q4 Mode

40 kHz – 1 MHz V<sub>pp</sub> ..... < 1 V<sup>11)</sup>  
40 kHz – 1 MHz V<sub>rms</sub> ..... < 0.2 V<sup>11)</sup>

### Remote sensing

Terminals on rear side ..... Load voltage drop  
Compensation


1) At nominal output power and line input voltage 3 x 400 VAC / 50 Hz. Soft-start to limit turn-on surge currents.  
2) Current according to the given power limit of the corresponding units. (P=U<sub>out</sub> \* I<sub>out</sub> ≤ 20 kW; for I<sub>out</sub> > 153 A --> U<sub>out</sub> < 130 V). No current derating.  
3) Optionally extendable to a maximum of 12000 mΩ  
4) Typical value for 0 – 100 % load variation, at constant line input and temperature conditions.  
5) Typical value for input voltage variation within 360 – 440 VAC, at constant load and temperature conditions.  
6) Typical recovery time to within ± 5 % band of set value for a load step 10 – 90 %, ohmic load, at constant line input and temperature conditions. Transient response time can be slightly affected by multi-unit operation.  
7) Rise/ fall time for 10%-90% of a set step.  
8) Maximum drift over 8 hours after 30 minute warm-up time, at constant line input, load and temperature conditions.  
9) Quadrant change time for small currents : Time from 5% to -5% I<sub>NOM</sub> and vice versa with a battery load.  
10) Typical change of output values versus ambient temperature, at constant line input and load conditions.  
11) Typical value at nominal ohmic load, line asymmetry < 1 V<sub>rms</sub>

Non-ohmic loads can lead to deviations in the technical data. All product specifications are subject to change without notification.

**General specifications**

Efficiency at nominal power .....	92 % <sup>16)</sup>
Weight .....	90 kg
Width front panel .....	483 mm
Width housing.....	(19") 447 mm
Height front panel .....	402 mm
Height housing.....	(9U) 397 mm
Depth with output terminals .....	634 mm
Depth housing .....	594 mm
Input connections: .....	terminal block 4 x 25 mm <sup>2</sup>
DC terminals: .....	nickel-plated copper bars, length: 40 mm, 1 hole 9 mm Ø in each bar
Operating orientation .....	upside
Storage, transport orientation .....	upside

**Operating range**

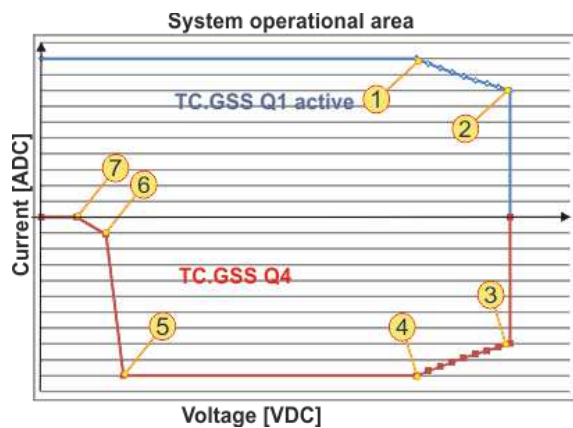

Q1 and Q4 range of device TC.GSS.20.130.400.S

-1- : .....	104 V / 192 A	-4-: .....	104 V / -192 A
-2- : .....	130 V / 154 A	-5-: .....	16 V / -192 A
-3- : .....	130 V / -154 A	-6-: .....	8 V / -77 A
.....		-7-: .....	4 V / 0 A

**Ambient conditions**

Operating temperature .....	5 – 40 °C
Storage temperature.....	-18 – 70 °C
Relative air humidity (non-condensing) .....	0 – 95 %

**Cooling**

**Standard:** Internal liquid cooling with completely integrated liquid to air heat-exchange system using temperature-controlled fans.

**Optional:** Integrated liquid cooling system of the power stage with completely integrated liquid to liquid heat-exchange system.

Heat exchanger	
Material.....	Stainless steel
Inlet/outlet on rear side size: .....	G ½"
Liquid temperature.....	15 <sup>18)</sup> – 35 °C
Flow .....	≥ 3 l/min
Pressure max. ....	≤ 10 bar
Pressure drop.....	50 mbar@3 l/min

**Protection**

**Built-in protection**

Overvoltage protection (programmable) .....	0 – 110 % U <sub>max</sub>
Overcurrent protection (programmable) .....	0 – 110 % I <sub>max</sub>
Max. reactive load voltage .....	≤ 110 % U <sub>max</sub>
short circuit protection .....	Cont. short circuit allowed
Islandig, grid off, requirements for the connection of micro-generators in public grid according VDE 0126/EN 50438.	

**Internal diagnostics**

line input conditions, transformer primary current, temperature conditions, processor idle time, system configuration, system communication, sensor signals, power semiconductor temperatures.

**Type of protection (according EN 60529)**

Basic construction.....	IP 20 (current bars on rear side excluded)
Mounted in cabinet .....	Up to IP 53

**Conformity CE-Marking**

**EMC Directive**

EMC emission.....	EN 61000-6-4
EMC immunity.....	EN 61000-6-2

**Low Voltage Directive**

Electronic equipment for use in power installations.....	EN 50178
--	----------

**Isolation**

Line to output .....	4000 Vrms
Line to case.....	2500 Vrms
Output to case .....	> 10 MΩ
per DC output .....	13.6 nF
- bar <sup>15)</sup> .....	+680 VDC / -680 VDC
+ bar <sup>15)</sup> .....	+680 VDC / -680 VDC

**Standard programming interfaces**

**Control port**

Isolation to electronics and earth: 125 Vrms  
25 pin D-sub connector, female, on rear panel

**Control port input functions**

Output voltage off / on.....	0 / 24 VAC / DC
2 digital application inputs .....	0 / 24 VAC / DC <sup>11)</sup>
Interlock circuit .....	0 / 24 VDC
Voltage setting 0 – 100 % .....	0 – 10 V
Current setting -100% – 100 % .....	-10 – 10 V
Power setting -100% – 100 % .....	+10 – 0 V
Int. resistance setting 0 – 1000 mΩ <sup>3)</sup> .....	0 – 10 V

**Control port output functions**

Unit ready / error .....	Relay contact
Output voltage on.....	Relay contact
Warnings.....	Relay contact
Actual voltage readback 0 – 100 % .....	0 – 10 V
Actual current readback -100% – 100 % .....	-10 V – 10 V
Resolution (programming and readback): U, I, P, Ri.....	0.2 % FS

3) Optionally extendable to a maximum of 12000 mΩ.  
11) Customer-specifically programmable.  
15) Peak Voltage including DC-Output Voltage.  
16) At 8kHz switching frequency line side inverter.  
17) Ni brazed, ready to use with deionized water.  
18) 20 °C ambient and ≤ 70 % relative air humidity.

TC.GSS.20.130.400.S (continued)

**Standard programming interfaces (continued)**

**RS232**

9 pin D-sub connector, female, on front panel  
Isolation to electronics and earth ..... 125 Vrms  
Baud rate ..... 38400 baud  
Resolution (programming and readback):  
U, I ..... 0.025 % FS  
P, Ri ..... 0.1 % FS

**Ordering Information**

**Ordering code**

TC.GSS.20.130.400.S.(Option)

**Standard Scope of delivery**

TopCon power supply unit ready to install, including:  
.....Operating manual (English or German)  
.....RS232 cable 1.8 m  
.....Installation disc TopControl,  
..... LabVIEW® and C/C++; C#.NET API (DLL file)

**Options**

**Front panel control unit HMI**

Integrated control, programming and display unit with graphic LC-Display, select wheel, push buttons and interactive text menus  
Languages (switchable)..... English, German  
Display resolution:  
U ..... 4 digits  
I ..... 3 digits  
P ..... Kilowatt + 1 decimal digit  
Ri ..... 1 mΩ

**Remote control unit RCU**

Specifications same as HMI, available in 2 versions:  
.....desk top and 19" rackmount  
max. cable length ..... 40 m  
Desk top W x H x D ..... 355 x 100 x 290 mm  
19" rackmount W x H x D ..... 483 x 88 (2 U) x 290 mm

**Further options**

TFEAAPControl ..... Function Generating Engine  
Time-based and parametric programming  
SASControl ..... SAS application program including TFEAAP  
BatControl ..... Battery application program  
BatSim ..... Battery simulation program  
RS232REAR<sup>12)</sup> ..... RS232 on front and rear panel  
USB<sup>13)</sup> ..... Interface USB on rear panel  
RS422<sup>12)</sup> ..... RS422 on rear panel  
TCEthernet<sup>14)</sup> ..... Ethernet to RS232 on rear panel  
IEEE<sup>13)</sup> ..... GPIB/ IEEE488.2/ SCPI on rear panel  
.....cannot be combined with CANOPEN nor with USB  
CANOPEN<sup>13)</sup> ..... CAN/ CANOPEN on rear panel  
CANCABLE ..... Connecting cable  
..... for Multi-Unit Operation or RCU: 2, 5, 10 m  
PACOB ..... Protection against accidental contact  
IRXTS<sup>3)</sup> ..... Internal resistance range extension  
LCAL ..... Integrated liquid cooling of the power stage, inlet / outlet on rear side, size G 1/2"  
AIRFILTER ..... Front panel airfilter 6 U / 9 U  
ISR ..... Integrated safety relay  
NSOV ..... Non-Standard output voltage (if possible)

- 3) Optionally extendable to a maximum of 12000 mΩ
- 11) Customer-specificly programmable.
- 12) This option and RS232: time-shared mode required, if used together.
- 13) RS232 only on Rear Panel.
- 14) Please order option RS232REAR separately.

<p><b>HEIDEN power GmbH</b> Am Wiesengrund 1 86932 Pürgen Germany</p>	<p><b>Tel.: +49-8196-9988-0</b> <b>Fax: +49-8196-998877</b> <b>info@heidenpower.com</b> <b>www.heidenpower.com</b></p>
---	--