


DATASHEET 1306-5626

Operating Modes Setting

Current:	Voltage:	Resistance:	Power:
0 ... 40 A	0 ... 260 V	0.25 Ω ... 300 Ω	0 ... 5600 W

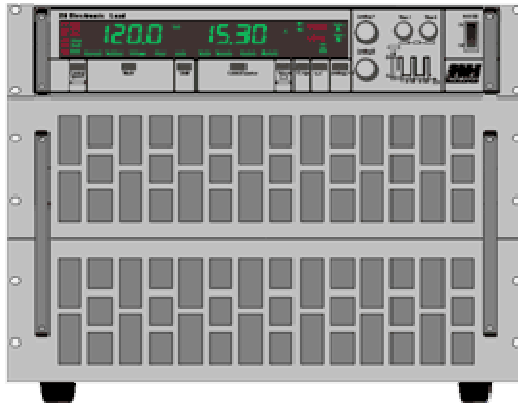

Accuracy of Settings*:

Current:	$\pm 0.5\%$ of setting $\pm 0.3\%$ of range
Resistance:	$\pm 1.5\%$ of setting $\pm 0.5\%$ of range

Presetting Accuracy*:

$\pm 0.4\%$ of setting
plus accuracy of respective mode

Power:

Nominal power:	up to $T_A = 21\text{ }^\circ\text{C}$
Derating:	-1.2% / $^\circ\text{C}$ for $T_A > 21\text{ }^\circ\text{C}$

Frequency Range:

DC, 40Hz ... 700Hz

Harmonic Distortion*:

50Hz / 60Hz:	$< 1\%$ at nominal current
Higher frequencies:	$> 1\%$

Input Capacitance:

ca. $1.5\mu\text{F}/1400\text{W}$

Operating Temperature:

$5\text{ }^\circ\text{C}$... $40\text{ }^\circ\text{C}$

Analog Programming:

0 ... 3.5V/0 ... 7V	for current setting 0 ... 100%
Accuracy*:	$\pm 0.5\%$ of setting $\pm 0.3\%$ of range
Input Resistance:	$> 10\text{k}\Omega$
GND:	isolated from the load input (max. $\pm 500\text{V}$)

Analog Monitor Outputs:

Current, Voltage:	0 ... 7V
-------------------	----------

Accuracy*:	±0.5% ±15mV
Power:	0 ... 5V
Accuracy*:	±2% ±30mV
GND:	isolated from the load input (max. ±500V)
Loading Capacity:	min. 2kΩ

External Control:	<ul style="list-style-type: none"> • Load switching • Trigger input and output • Emergency shutdown
--------------------------	--

Protection Equipment:	<ul style="list-style-type: none"> • Current and power limitation • Over-voltage protection up to 120% of rated voltage • Over-temperature deactivation • Transient protection
------------------------------	--


Minimum Voltage:

260V-Devices: **Full current from ca. 3V**

440V-Devices: **Full current from ca. 5V**

Modulator for AC & DC:

Pulse t1: 100µs ... 1s
Pulse t2: 100µs ... 1s
(in two ranges)



Accuracy: **±1% of setting
±0.5% of end value**

Load level: **each 0 ... 100%**

Programming (for interface options):

Settings: **16 Bit resolution**

Accuracy: **see accuracy of settings**

Measurements: **18 Bit resolution**

Accuracy*I: **±0.5% of m.v., ±0.05% of range**

Accuracy*V: **±0.5% of m.v., ±0.05% of range**

Measuring rate: **ca. 3 measurements/s**

Parallel Operation: **up to 3 devices in master-slave operation (hardware-controlled)**

Cooling: **infinitely variable controlled fans**

Noise max. ¹⁾: **73 db(A)**

Dimenson, Weight: **19"-8 HU, 53 kg**

Mains Supply: 115/230V±10%, 50...60Hz

Power Consumption: 575 VA

Colour:

Front panel: **RAL7032 (pebble grey)**

Sides, lid: **RAL7037 (stone grey)**

Electric Safety: DIN EN 61010-1

EMC, CE Mark: DIN EN 61010: 2002-08
DIN EN 61326-1: 2006-10
DIN EN 61000-3-2: 2006-10
DIN EN 61000-3-3: 2006-06

** The accuracy data are referred to input frequency 50/60Hz.
At higher frequencies the accuracy will be worse.*

1) measured at the front panel at 1m distance