


DATASHEET 1306-12644

Operating Modes Setting

Current: Voltage: Resistance: Power:

0 ... 45 A 0 ... 440 V 0.22 Ω ... 444 Ω 0 ... 12600 W

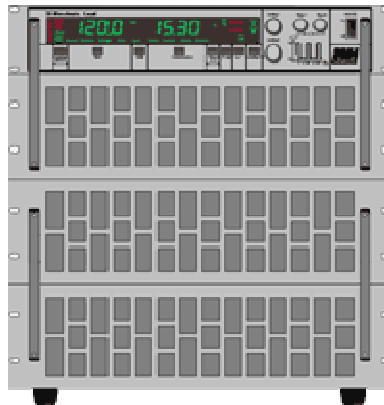

Accuracy of Settings*:

Current: **±0.5%** of setting
 ±0.3% of range

Resistance: **±1.5%** of setting
 ±0.5% of range

Presetting Accuracy*:

±0.4% of setting
 plus accuracy of respective mode

Power:

Nominal power: **up to T_A = 21 °C**

Derating: **-1.2% / °C for T_A > 21 °C**

Frequency Range:

DC, 40Hz ... 700Hz

Harmonic Distortion*:

50Hz / 60Hz: **<1% at nominal current**

Higher frequencies: **>1%**

Input Capacitance:

ca. 1.5µF/1400W

Operating Temperature:

5°C ... 40°C

Analog Programming:

0 ... 3.5V/0 ... 7V **for current setting 0 ... 100%**

Accuracy*: **±0.5%** of setting
 ±0.3% of range

Input Resistance: **>10kΩ**

GND: **isolated from the load input**
(max.±500V)

Analog Monitor Outputs:

Current, Voltage: **0 ... 7V**

Accuracy*:	±0.5% ±15mV
Power:	0 ... 5V
Accuracy*:	±2% ±30mV
GND:	isolated from the load input (max. ±500V)
Loading Capacity:	min. 2kΩ

External Control:	<ul style="list-style-type: none"> • Load switching • Trigger input and output • Emergency shutdown
--------------------------	--

Protection Equipment:	<ul style="list-style-type: none"> • Current and power limitation • Over-voltage protection up to 120% of rated voltage • Over-temperature deactivation • Transient protection
------------------------------	--


Minimum Voltage:

260V-Devices: **Full current from ca. 3V**

440V-Devices: **Full current from ca. 5V**

Modulator for AC & DC:

Pulse t1: 100µs ... 1s
Pulse t2: 100µs ... 1s
(in two ranges)



Accuracy: **±1% of setting
±0.5% of end value**

Load level: **each 0 ... 100%**

Programming (for interface options):

Settings: **16 Bit resolution**

Accuracy: **see accuracy of settings**

Measurements: **18 Bit resolution**

Accuracy*I: **±0.5% of m.v., ±0.05% of range**

Accuracy*V: **±0.5% of m.v., ±0.05% of range**

Measuring rate: **ca. 3 measurements/s**

Parallel Operation: **up to 3 devices in master-slave operation (hardware-controlled)**

Cooling: **infinitely variable controlled fans**

Noise max. ¹⁾: **76 db(A)**

Dimenson, Weight: **19"-11 HU, 85 kg**

Mains Supply: 115/230V±10%, 50...60Hz

Power Consumption: 1150 VA

Colour:

Front panel: **RAL7032 (pebble grey)**

Sides, lid: **RAL7037 (stone grey)**

Electric Safety: DIN EN 61010-1

EMC, CE Mark: DIN EN 61010: 2002-08
DIN EN 61326-1: 2006-10
DIN EN 61000-3-2: 2006-10
DIN EN 61000-3-3: 2006-06

** The accuracy data are referred to input frequency 50/60Hz.
At higher frequencies the accuracy will be worse.*

1) measured at the front panel at 1m distance