
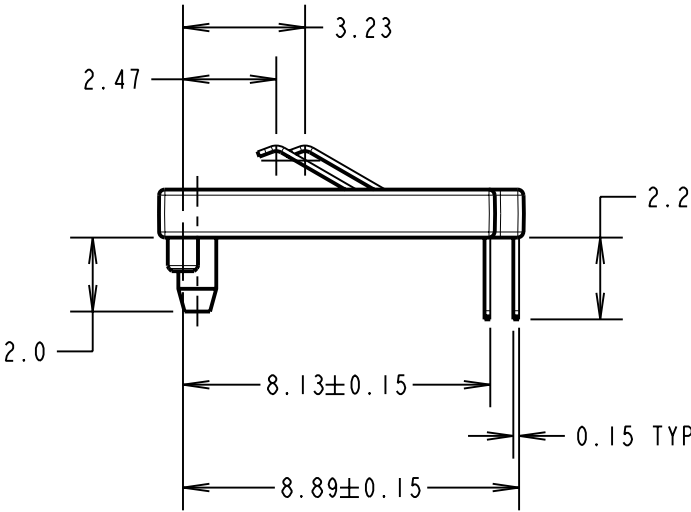
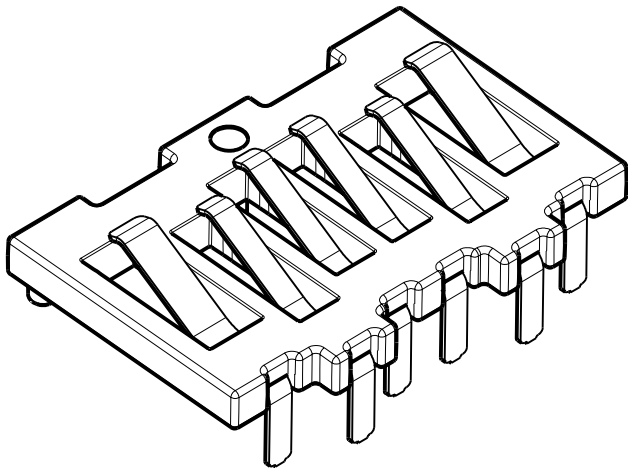


Customer Information Sheet

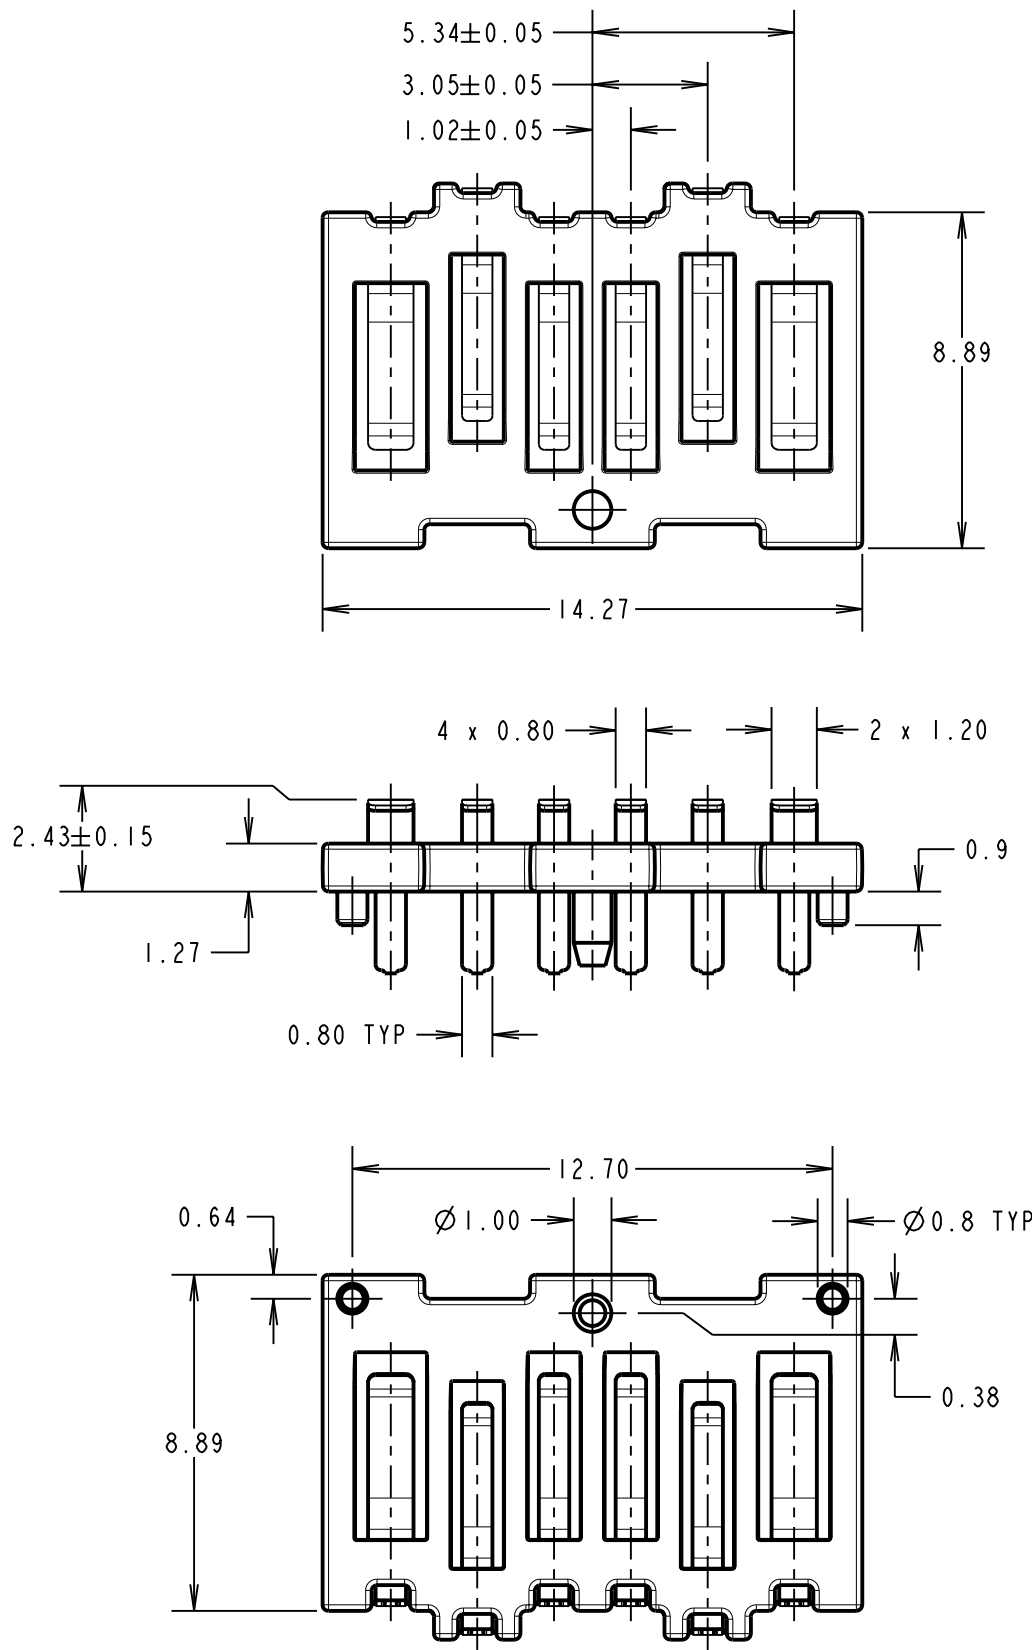

COMPONENT SPECIFICATION:
MATERIAL:
INSULATOR = 30% GF POLYAMIDE 46, UL94V-0 BLACK;
CONTACTS = BERYLLIUM COPPER
LOCATION PEG = BRASS.
FINISH:
CONTACTS = 0.75µ MIN GOLD IN MATING AREA AND 3.75µ MIN 100% TIN ON SOLDER TAILS, BOTH OVER NICKEL.
LOCATION PEG = 3.75µ MIN 100% TIN OVER NICKEL.
COMPLIANCE:
THE CONNECTOR ASSEMBLY IS RoHS COMPLIANT.
PACKING: TUBE

MGP	A	07.10.09	----
NAME	ISS.	DATE	C/NOTE
APPROVED: MGP			
CHECKED: RA			
DRAWN: MARK G PLESTED			
CUSTOMER REF.:			
ASSEMBLY DRG:			

HARWIN			TITLE: BATTERY CONNECTOR 2 + 4 PC TAIL CONTACTS	
HARWIN USA TEL: 603 893 5376 FAX: 603 893 5396 mis@harwin.com	HARWIN Europe (UK) TEL: 023 9231 4545 FAX: 023 9231 4590 mis@harwin.co.uk	HARWIN Asia TEL: +65 6 779 4909 FAX: +65 6 779 3868 mis@harwin.com.sg	DRAWING NUMBER: M95-3020642	
THIS DRAWING AND ANY INFORMATION OR DESCRIPTIVE MATTER SET OUT HEREON ARE CONFIDENTIAL AND COPYRIGHT PROPERTY OF THE HARWIN GROUP AND MUST NOT BE DISCLOSED, LOANED, COPIED OR USED FOR MANUFACTURING, TENDERING OR FOR ANY OTHER PURPOSE WITHOUT THEIR WRITTEN PERMISSION.			TOLERANCES X. = ±1mm X.X = ±0.25mm X.XX = ±0.10mm X.XXX = ±0.01mm ANGLES = ±5° UNLESS STATED	MATERIAL: SEE ABOVE FINISH: SEE ABOVE S/AREA: - mm ²
			SHT 2 OF 2	