



High Power Pulsed L Band T/R Module


Aethercomm P/N TR 1.75-1.85-125 is a high power transmit/receive module packaged in a very compact 5.0" by 9.0" by 2.0" extremely rugged package. This TR module operates over the High Military L Band Frequency Range and provides TDMA data communications of time-space-position information between aircraft and ground stations. It is employed on fighter and attack aircraft for combat training.

The system operates in transmit or receive mode at any given time but not simultaneously. Typical transmit duty cycles do not exceed 10%. In Rx mode, the module provides a low noise front-end that includes band limited filtering, a high power limiter, low-noise amplification and image rejection filtering. In the Tx mode, the module amplifies a low level, L Band signal up to a power level of greater than 125 watts at the antenna. The antennal port offers a bi-directional interface to the Rx and Tx sections of the module. This unit is fully GPS compliant. Standard features include forward power monitoring, reflected power monitoring, output short and open circuit protection, over and under voltage protection, receiver protection, very fast switching speeds between Rx and Tx operation, an over-temperature alarm feature and a fully regulated DC-DC converter. This unit operates

Transmit Section Operational Performance

Parameter	Min	Typ	Max
Peak Output Power (Watts)	125	150	175
Tx Input Return Loss (dB)	-	-17.0	-14.0
Duty Cycle (%)	-	3	10
Harmonics (dBc)	-	-70	-65
Non Harmonic Spurs (dBc)	< -100	< -90	< -80
+28Vdc Current at Pout = 100 Watts (Amps)	-	12.5	14.0
Rejection at 1282 and 1522 MHz (dB)	50	60	NA
Rx to Tx Switching Time (uSec)	25	28	40
NPD @ GPS L1 and L2 (dBm/1kHz)	-	-110	-100

- High power, high L band transmit/receive module
- Tx minimum output power = 125 watts @ 25C
- Rx typical noise figure = 3.0 dB
- Transmit pulse widths of 3mSecs at a 10% duty cycle
- Fully GPS compatible

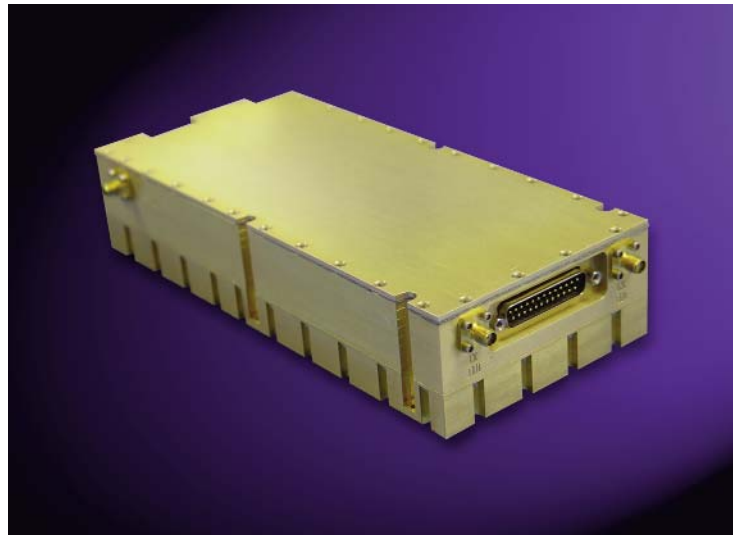

from a 28Vdc; -28Vdc and a +12 Vdc power supplies and can survive temperatures of 95°C base plate temperature. This high performance module is enclosed in a compact housing that is inserted into an internal bay of fighter and attack aircraft. It is environmentally sealed and will pass MIL-STD-461E EMI testing.

Receive Section Operational Performance

Parameter	Min	Typ	Max
Average Input Power - No Damage (dBm)	NA	NA	30
Noise Figure (dB)	-	2.75	3.00
Rx Input Return Loss (dB)	-	-16.0	-14.0
Rx Gain (dB)	20.0	22.0	24.0
OIP3 (dBm)	31	33	-
P1dB (dBm)	20	23	-
Rejection at 1282 and 1522 MHz (dB)	50	60	NA

Aethercomm Inc. reserves the right to make changes without further notice. Aethercomm recommends that before these items herein are specified into a system or critical application that the performance characteristics be verified by contacting the factory.