

HIGH EFFICIENCY RECTIFIERS

VOLTAGE RANGE: 200 V
CURRENT: 1.5 A


FEATURES

- ◇ Low cost
- ◇ Low leakage
- ◇ Low forward voltage drop
- ◇ High current capability
- ◇ Easily cleaned with alcohol, Isopropanol and similar solvents
- ◇ The plastic material carries U/L recognition 94V-0

MECHANICAL DATA

- ◇ Case: JEDEC DO--15, molded plastic
- ◇ Terminals: Axial lead, solderable per MIL-STD-202, Method 208
- ◇ Polarity: Color band denotes cathode
- ◇ Weight: 0.014 ounces, 0.39 grams
- ◇ Mounting position: Any

DO - 15

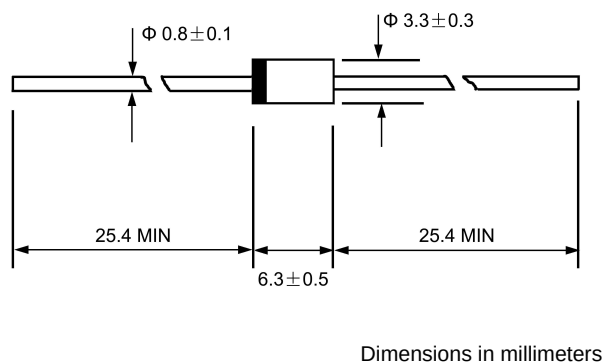

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.

Single phase, half wave, 60 Hz, resistive or inductive load. For capacitive load, derate by 20%.

		RN1Z	UNITS
Maximum recurrent peak reverse voltage	V_{RRM}	200	V
Maximum RMS voltage	V_{RMS}	140	
Maximum DC blocking voltage	V_{DC}	200	
Maximum average forward rectified current 9.5mm lead length, @ $T_A = 75^\circ\text{C}$	$I_{F(AV)}$	1.5	A
Peak forward surge current 8.3ms single half-sine-wave superimposed on rated load @ $T_J = 125^\circ\text{C}$	I_{FSM}	60.0	A
Maximum instantaneous forward voltage @ 1.5 A	V_F	0.92	V
Maximum reverse current @ $T_A = 25^\circ\text{C}$ at rated DC blocking voltage @ $T_A = 100^\circ\text{C}$	I_R	20.0 1000.0	μA
Maximum reverse recovery time (Note1)	t_{rr}	50	ns
Typical junction capacitance (Note2)	C_J	50	pF
Typical thermal resistance (Note3)	$R_{\theta JA}$	50	$^\circ\text{C}/\text{W}$
Operating junction temperature range	T_J	- 55 ---- + 150	$^\circ\text{C}$
Storage temperature range	T_{STG}	- 55 ---- + 150	$^\circ\text{C}$



NOTE: 1. Measured with $I_F = 0.5\text{A}$, $I_R = 1\text{A}$, $t_{rr} = 0.25\text{A}$.

2. Measured at 1.0MHz and applied reverse voltage of 4.0V DC.

3. Thermal resistance from junction to ambient.

www.galaxycn.com

FIG.1 – TEST CIRCUIT DIAGRAM AND REVERSE RECOVERY TIME CHARACTERISTIC

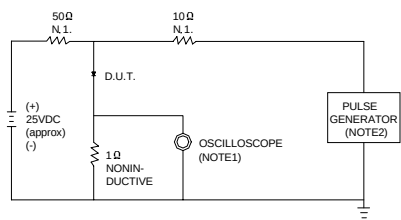


NOTES:1.RISE TIME = 7ns MAX.INPUT IMPEDANCE =1M Ω . 22pF.
2.RISE TIME =10ns MAX.SOURCE IMPEDANCE=50 Ω .

SET TIME BASE FOR 10/20 ns/cm

FIG.2 -- TYPICAL FORWARD CHARACTERISTIC


INSTANTANEOUS FORWARD CURRENT
AMPERES



INSTANTANEOUS FORWARD VOLTAGE, VOLTS

FIG.3 --FORWARD DERATING CURVE


AVERAGE FORWARD RECTIFIED CURRENT
AMPERES

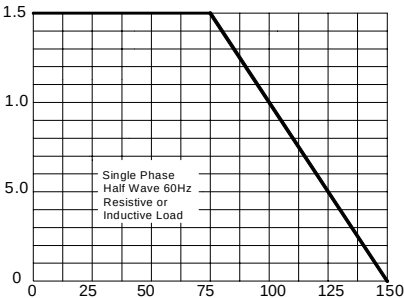

AMBIENT TEMPERATURE, °C

FIG.4 --TYPICAL JUNCTION CAPACITANCE


JUNCTION CAPACITANCE,pF

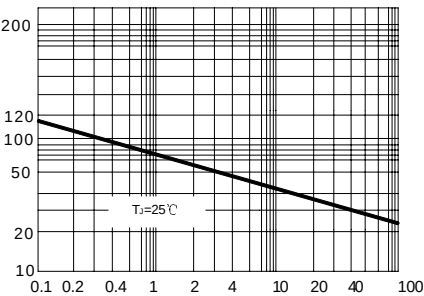

REVERSE VOLTAGE,VOLTS

FIG.5--PEAK FORWARD SURGE CURRENT

PEAK FORWARD SURGE CURRENT
AMPERES

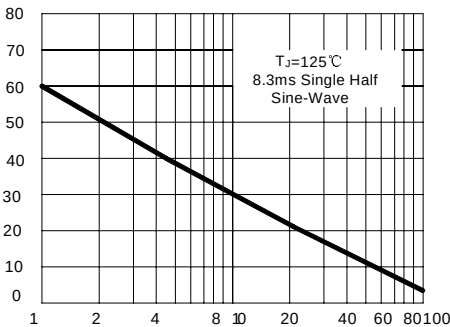

NUMBER OF CYCLES AT 60Hz