

FAST RECOVERY RECTIFIERS

VOLTAGE RANGE: 200 --- 1000 V
CURRENT: 1.3 A


FEATURES

- ◇ Low cost
- ◇ Diffused junction
- ◇ Low leakage
- ◇ Low forward voltage drop
- ◇ High current capability
- ◇ Easily cleaned with Freon, Isopropanol and similar solvents

MECHANICAL DATA

- ◇ Case: JEDEC DO-15, molded plastic
- ◇ Terminals: Axial lead, solderable per MIL - STD-202, Method 208
- ◇ Polarity: Color band denotes cathode
- ◇ Weight: 0.014 ounces, 0.39 grams
- ◇ Mounting position: Any

DO - 15

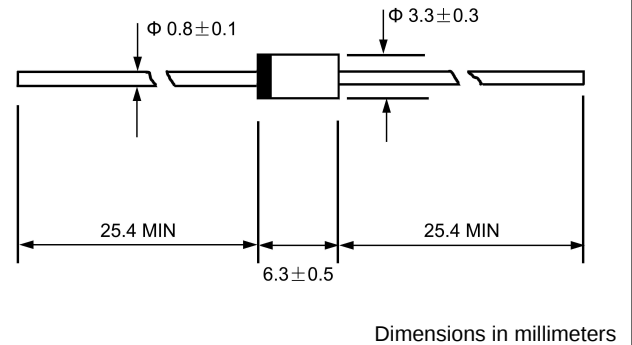

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.

Single phase, half wave, 50Hz, resistive or inductive load. For capacitive load, derate by 20%.

		BYD 33D	BYD 33G	BYD 33J	BYD 33K	BYD 33M	UNITS
Maximum recurrent peak reverse voltage	V _{RRM}	200	400	600	800	1000	V
Maximum RMS voltage	V _{RMS}	140	280	420	560	700	V
Maximum DC blocking voltage	V _{DC}	200	200	600	800	1000	V
Maximum average forw ard rectified current 9.5mm lead length, @T _A =75℃	I _{F(AV)}	1.3					A
Peak forw ard surge current 10ms single half-sine-w ave superimposed on rated load @T _J =125℃	I _{FSM}	20.0					A
Maximum instantaneous forw ard voltage @ 1.0A	V _F	1.3					V
Maximum reverse current @T _A =25℃ at rated DC blocking voltage @T _A =100℃	I _R	1.0 100.0					μ A
Maximum reverse recovery time (Note1)	t _{rr}	250			300		ns
Typical junction capacitance (Note2)	C _J	20					pF
Typical thermal resistance (Note3)	R _{θJA}	120					K/W
Operating junction temperature range	T _J	-55 ---- + 150					℃
Storage temperature range	T _{STG}	- 55 ---- + 150					℃


NOTE: 1. Measured with $I_F=0.5\text{A}$, $I_R=1\text{A}$, $t_{rr}=0.25\text{A}$.

2. Measured at 1.0MHz and applied reverse voltage of 4.0V DC.

3. Thermal resistance from junction to ambient.

www.galaxycn.com

FIG.1 – REVERSE RECOVERY TIME CHARACTERISTIC AND TEST CIRCUIT DIAGRAM

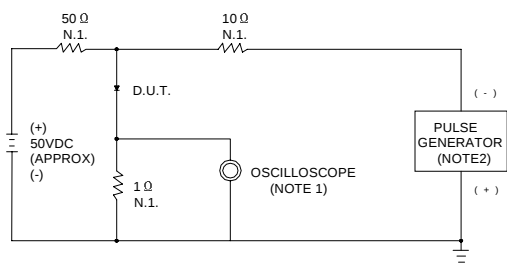

NOTES:1.RISE TIME=7ns MAX. INPUT IMPEDANCE=1MΩ.22pF
2.RISE TIME=10ns MAX. SOURCE IMPEDANCE=50Ω

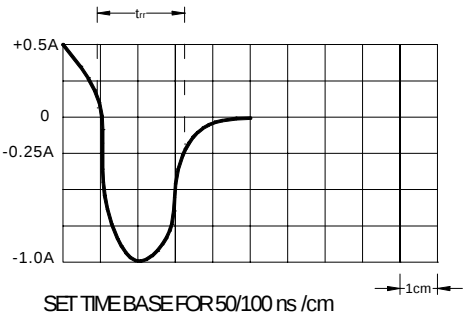


FIG.2 –FORWARD DERATING CURVE

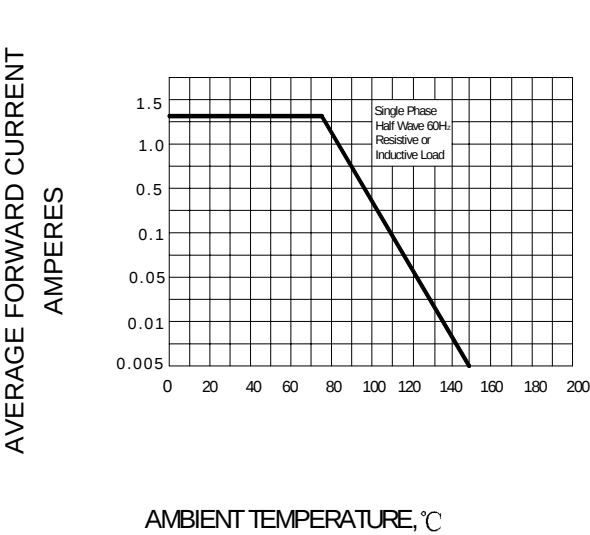


FIG.3 –PEAK FORWARD SURGE CURRENT

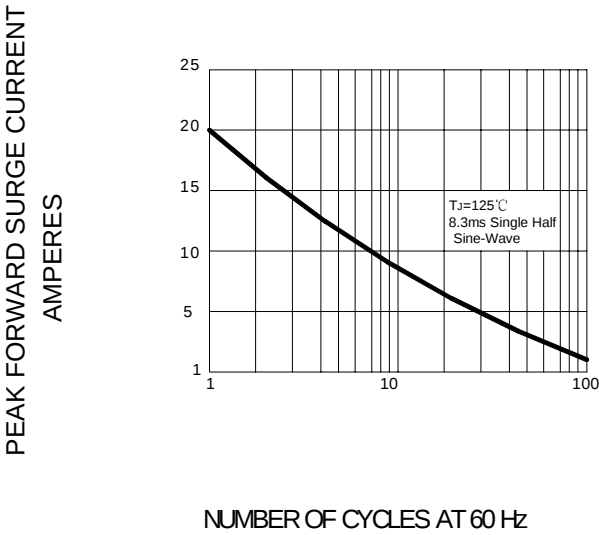


FIG.4-TYPICAL FORWARD CHARACTERISTIC

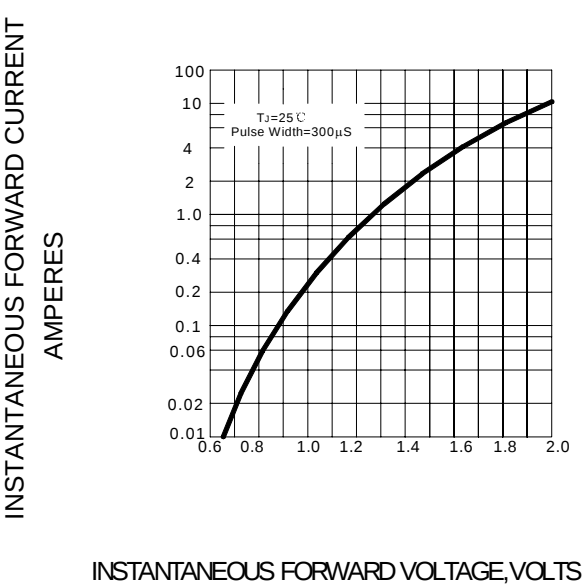


FIG.5-TYPICAL JUNCTION CAPACITANCE

