

FAST RECOVERY RECTIFIERS

VOLTAGE RANGE: 50 --- 1000 V

CURRENT: 1.5 A


FEATURES

- ◇ Low cost
- ◇ Diffused junction
- ◇ Low leakage
- ◇ Low forward voltage drop
- ◇ High current capability
- ◇ Easily cleaned with Freon, Alcohol, Isopropanol and similar solvents
- ◇ The plastic material carries U/L recognition 94V-0

MECHANICAL DATA

- ◇ Case: JEDEC DO-15, molded plastic
- ◇ Terminals: Axial lead, solderable per MIL-STD-750, Method 2026
- ◇ Polarity: Color band denotes cathode
- ◇ Weight: 0.014 ounces, 0.39 grams
- ◇ Mounting position: Any

DO - 15

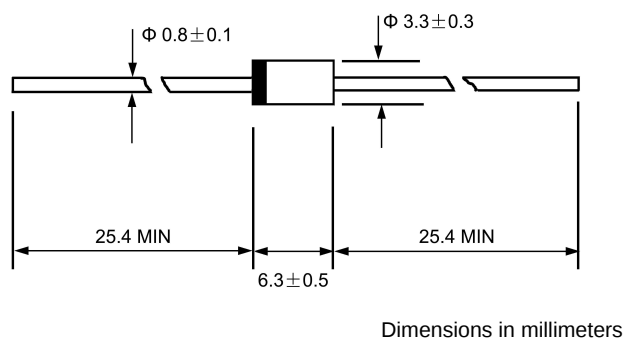

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.

Single phase, half wave, 60 Hz, resistive or inductive load. For capacitive load, derate by 20%.

		RGP 15A	RGP 15B	RGP 15D	RGP 15G	RGP 15J	RGP 15K	RGP 15M	UNITS
Maximum recurrent peak reverse voltage	V _{RRM}	50	100	200	400	600	800	1000	V
Maximum RMS voltage	V _{RMS}	35	70	140	280	420	560	700	V
Maximum DC blocking voltage	V _{DC}	50	100	200	400	600	800	1000	V
Maximum average forw ard rectified current 9.5mm lead length, @T _A =75°C	I _{F(AV)}	1.5							A
Peak forw ard surge current 8.3ms single half-sine-wave superimposed on rated load @T _J =125°C	I _{FSM}	50.0							A
Maximum instantaneous forw ard voltage @ 1.5 A	V _F	1.3							V
Maximum reverse current @T _A =25°C at rated DC blocking voltage @T _A =100°C	I _R	5.0 200.0							μ A
Maximum reverse recovery time (Note1)	t _{rr}	150				250	500		ns
Typical junction capacitance (Note2)	C _J	18							pF
Typical thermal resistance (Note3)	R _{θJA}	45							°C /W
Operating junction temperature range	T _J	- 55---- +150							°C
Storage temperature range	T _{STG}	- 55---- + 150							°C

NOTE: 1. Measured with $I_F=0.5\text{A}$, $I_R=1\text{A}$, $t_{rr}=0.25\text{A}$.

2. Measured at 1.0MHz and applied reverse voltage of 4.0V DC.

3. Thermal resistance from junction to ambient.

www.galaxyen.com

FIG.1 – FORWARD DERATING CURVE

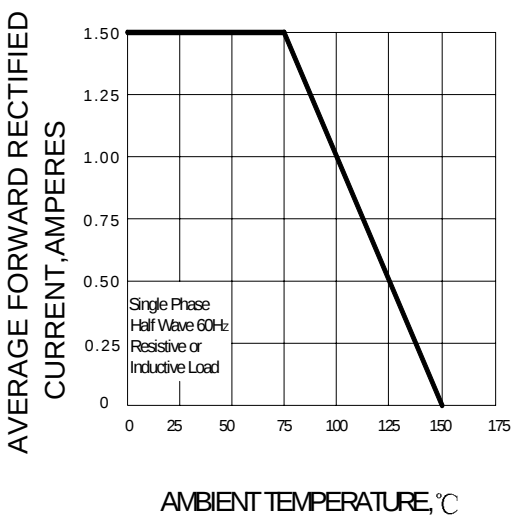


FIG.2 –PEAK FORWARD SURGE CURRENT

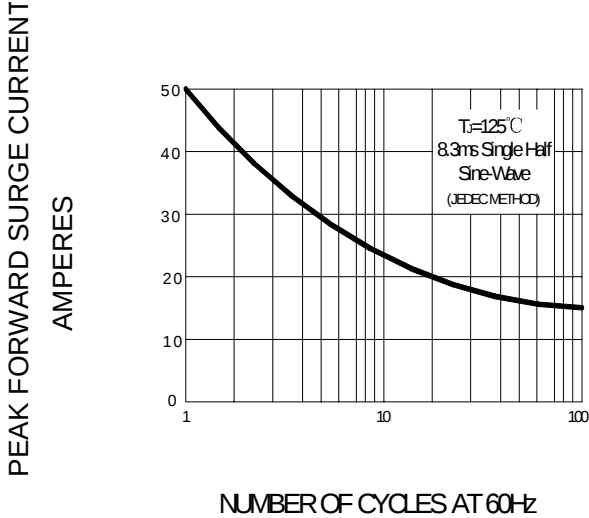


FIG.3 –TYPICAL FORWARD CHARACTERISTICS

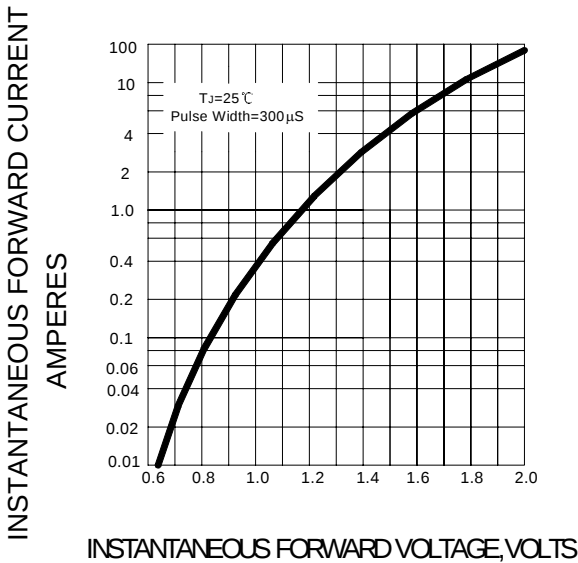


FIG.4-TYPICAL JUNCTION CAPACITANCE


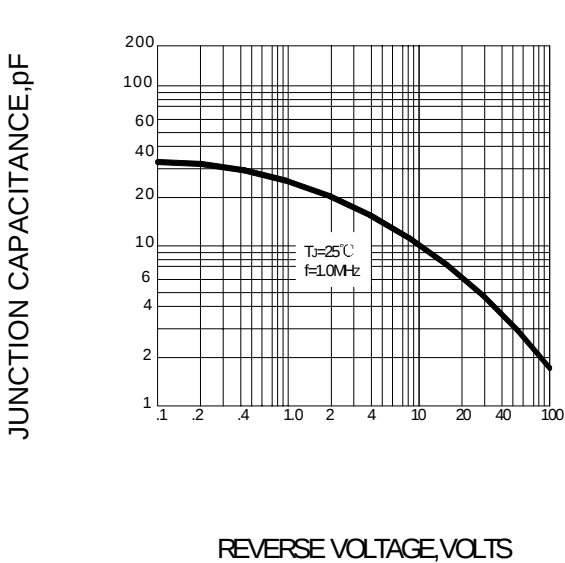


FIG.5-REVERSE RECOVERY TIME CHARACTERISTIC AND TEST CIRCUIT DIAGRAM

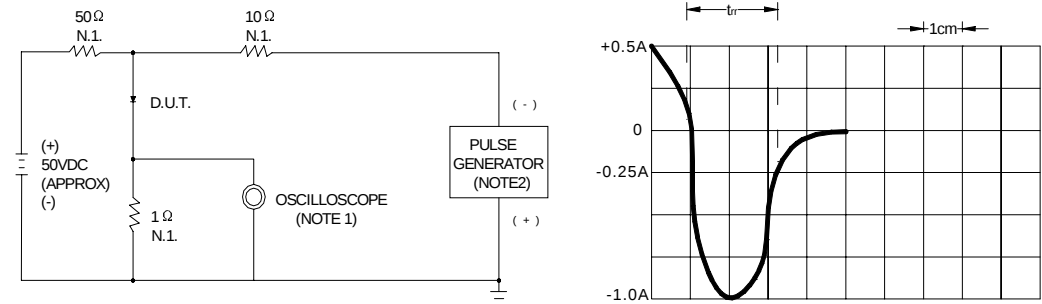

NOTES: 1. RISE TIME = 7ns MAX. INPUT IMPEDANCE = 1MΩ, 22pF
2. RISE TIME = 10ns MAX. SOURCE IMPEDANCE = 50Ω