

### FAST RECOVERY RECTIFIER

VOLTAGE RANGE: 1500 V  
CURRENT: 3.0 A


#### FEATURES

- ◇ Low cost
- ◇ Diffused junction
- ◇ Low leakage
- ◇ Low forward voltage drop
- ◇ High current capability
- ◇ Easily cleaned with Freon, Alcohol, Isopropanol and similar solvents
- ◇ The plastic material carries U/L recognition 94V-0

#### MECHANICAL DATA

- ◇ Case: JEDEC DO-27, molded plastic
- ◇ Terminals: Axial lead, solderable per MIL-STD-202, Method 208
- ◇ Polarity: Color band denotes cathode
- ◇ Weight: 0.041 ounces, 1.15 grams
- ◇ Mounting position: Any

#### DO - 27

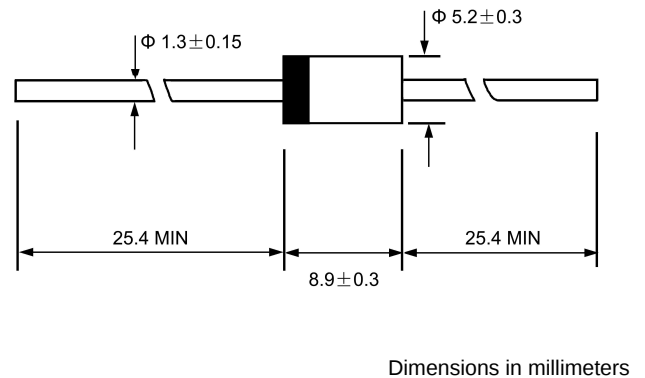

#### MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.

Single phase, half wave, 60 Hz, resistive or inductive load. For capacitive load, derate by 20%.

|                                                                                                                     |                 | 3TH41         | UNITS              |
|---------------------------------------------------------------------------------------------------------------------|-----------------|---------------|--------------------|
| Maximum recurrent peak reverse voltage                                                                              | $V_{RRM}$       | 1500          | V                  |
| Maximum RMS voltage                                                                                                 | $V_{RMS}$       | 1050          | V                  |
| Maximum DC blocking voltage                                                                                         | $V_{DC}$        | 1500          | V                  |
| Maximum average forward rectified current<br>9.5mm lead length, @ $T_A = 75^\circ\text{C}$                          | $I_{F(AV)}$     | 3.0           | A                  |
| Peak forward surge current<br>8.3ms single half-sine-wave<br>superimposed on rated load @ $T_J = 125^\circ\text{C}$ | $I_{FSM}$       | 200.0         | A                  |
| Maximum instantaneous forward voltage<br>@ 3.5 A                                                                    | $V_F$           | 1.5           | V                  |
| Maximum reverse current @ $T_A = 25^\circ\text{C}$<br>at rated DC blocking voltage @ $T_A = 100^\circ\text{C}$      | $I_R$           | 10.0<br>200.0 | $\mu\text{A}$      |
| Maximum reverse recovery time (Note1)                                                                               | $t_{rr}$        | 800           | ns                 |
| Typical junction capacitance (Note2)                                                                                | $C_J$           | 32            | pF                 |
| Typical thermal resistance (Note3)                                                                                  | $R_{\theta JA}$ | 22            | $^\circ\text{C/W}$ |
| Operating junction temperature range                                                                                | $T_J$           | - 55---- +150 | $^\circ\text{C}$   |
| Storage temperature range                                                                                           | $T_{STG}$       | - 55---- +150 | $^\circ\text{C}$   |

NOTE: 1. Measured with  $I_F = 0.5\text{A}$ ,  $I_R = 1\text{A}$ ,  $t_{rr} = 0.25\text{A}$ .

2. Measured at 1.0MHz and applied reverse voltage of 4.0V DC.

3. Thermal resistance from junction to ambient.

www.galaxycn.com

FIG.1 – REVERSE RECOVERY TIME CHARACTERISTIC AND TEST CIRCUIT DIAGRAM

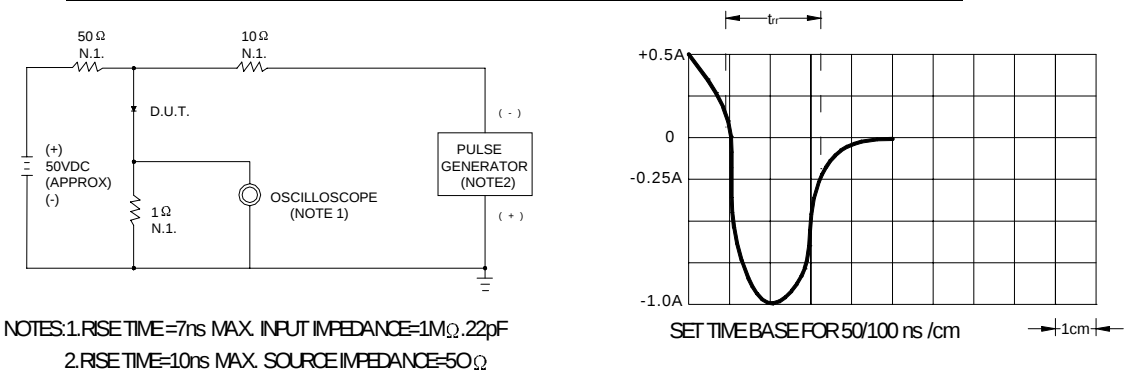


FIG.2 – FORWARD DERATING CURVE

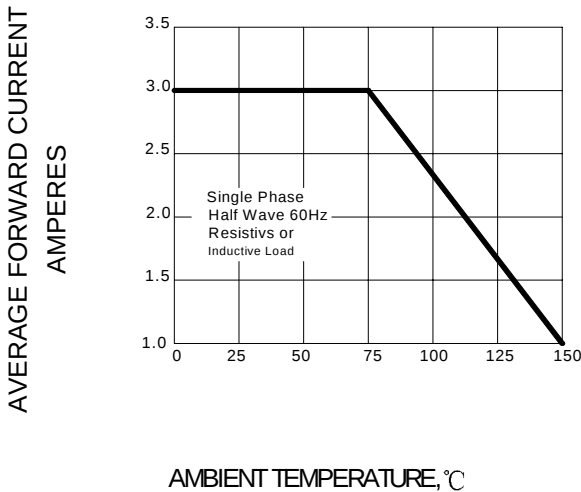


FIG.3 – PEAK FORWARD SURGE CURRENT

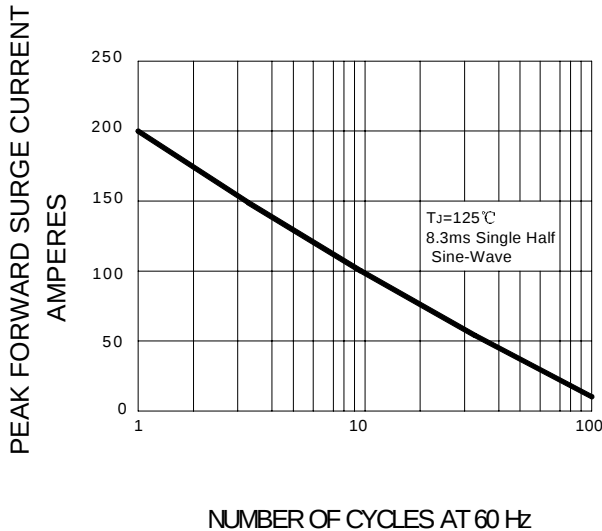


FIG.4 – TYPICAL FORWARD CHARACTERISTIC

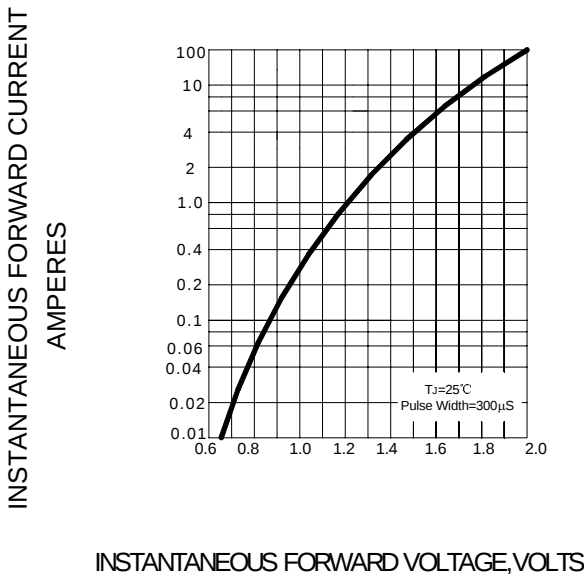


FIG.5 – TYPICAL JUNCTION CAPACITANCE

