

ULTRA FAST RECTIFIER

VOLTAGE RANGE: 50 --- 800 V
CURRENT: 2.0


FEATURES

- ◇ Low cost
- ◇ Diffused junction
- ◇ low leakage current
- ◇ High current capability
- ◇ Easily cleaned with alcohol, Isopropanol and similar solvents
- ◇ Plastic package has underwriters laboratory flammability classification 94V-0

MECHANICAL DATA

- ◇ Case: JEDEC DO-15, molded plastic
- ◇ Terminals: Axial lead, solderable per MIL-STD-202, Method 208
- ◇ Polarity: Color band denotes cathode
- ◇ Weight: 0.014 ounces, 0.39 grams
- ◇ Mounting position: Any

DO - 15

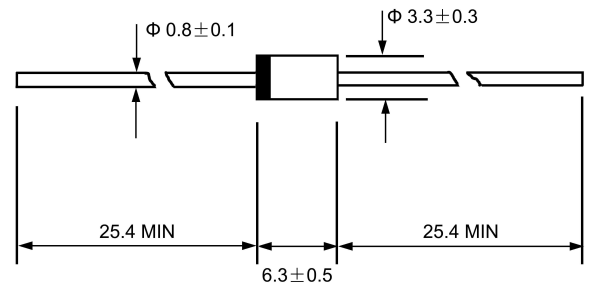

Dimensions in millimeters

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.

Single phase, half wave, 60Hz, resistive or inductive load. For capacitive load, derate by 20%.

		UGP 20A	UGP 20B	UGP 20D	UGP 20F	UGP 20G	UGP 20J	UGP 20K	UNITS
Maximum recurrent peak reverse voltage	V _{RRM}	50	100	200	300	400	600	800	V
Maximum RMS voltage	V _{RMS}	35	70	140	210	280	420	560	V
Maximum DC blocking voltage	V _{DC}	50	100	200	300	400	600	800	V
Maximum average forward rectified current 9.5mm lead length, @T _A =75°C	I _{F(AV)}	2.0							A
Peak forward surge current 8.3ms single half-sine-wave superimposed on rated load @T _J =125°C	I _{FSM}	65.0					60.0		A
Maximum instantaneous forward voltage @ 2.0A	V _F	0.95			1.25		1.70	2.20	V
Maximum reverse current @T _A =25°C at rated DC blocking voltage @T _A =100°C	I _R	5.0 100.0							μ A
Maximum reverse recovery time (Note1)	trr	35							ns
Typical junction capacitance (Note2)	C _J	22							pF
Typical thermal resistance (Note3)	R _{θJA}	40							°C/W
Operating junction temperature range	T _J	- 55 ----- + 150							°C
Storage temperature range	T _{STG}	- 55 ----- + 150							°C

NOTE: 1. Measured with $I_F=0.5\text{A}$, $I_R=1\text{A}$, $t_{rr}=0.25\text{A}$.

2. Measured at 1.0MHz and applied reverse voltage of 4.0V DC.

3. Thermal resistance junction to ambient

www.galaxycn.com

FIG.1 -- FORWARD DERATING CURVE

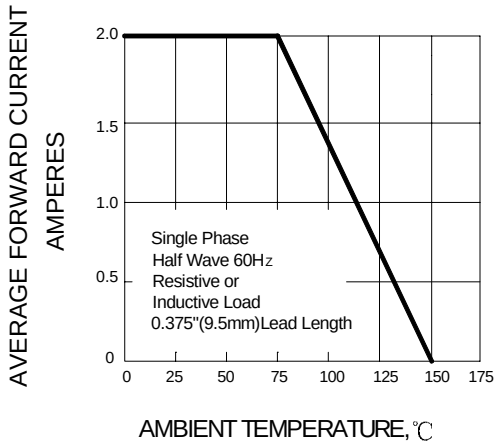


FIG.2 --PEAK FORWARD SURGE CURRENT

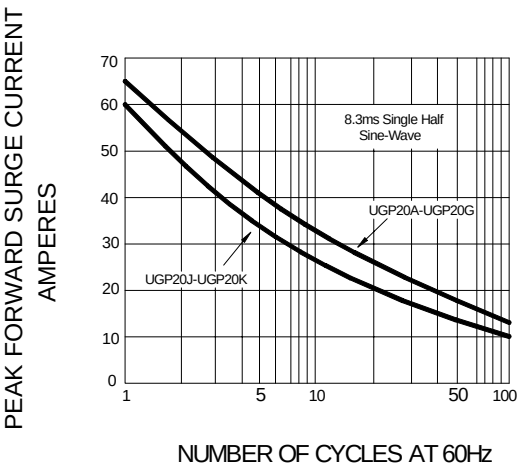


FIG.3 --TYPICAL FORWARD CHARACTERISTICS

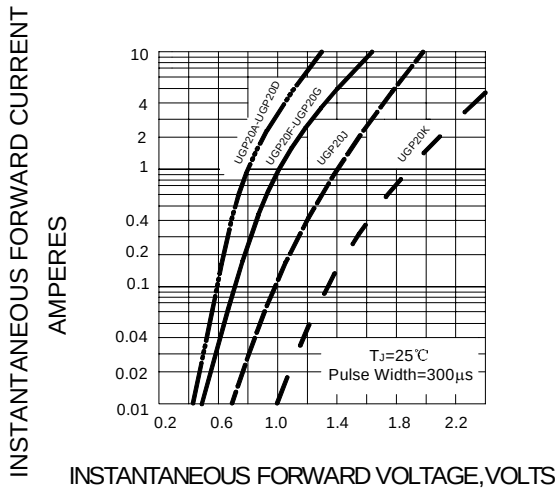


FIG.4--TYPICAL REVERSE CHARACTERISTICS

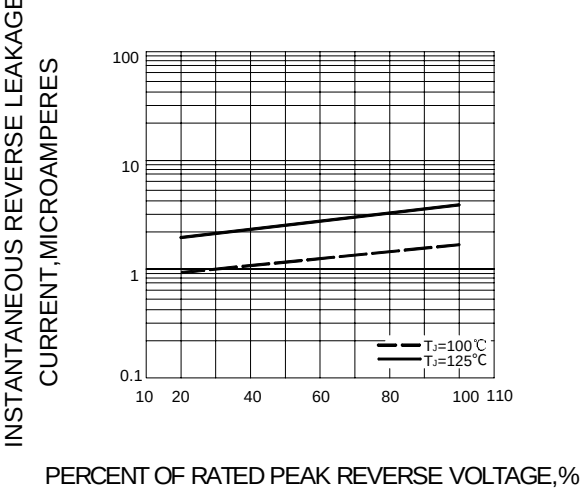


FIG.5--TYPICAL JUNCTION CAPACITANCE

