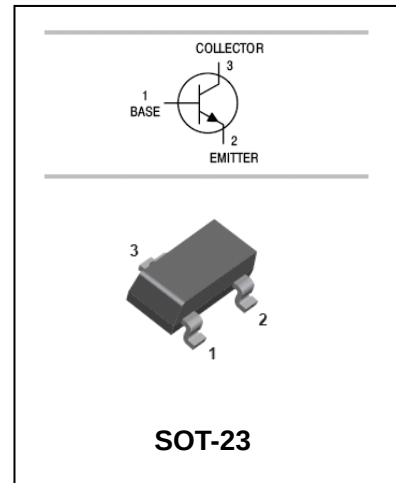


Silicon Epitaxial Planar Transistor**2SC2715****FEATURES**

- Power dissipation.

**APPLICATIONS**

- Audio frequency general purpose amplifier applications.
- High power gain
- Recommended for FM IF, OSC stage and AM CONV. IF stage

**ORDERING INFORMATION**

Type No.	Marking	Package Code
2SC2715	RR1/RO1/R Y1	SOT-23

MAXIMUM RATING @ Ta=25°C unless otherwise specified

Symbol	Parameter	Value	Units
V_{CBO}	Collector-Base Voltage	35	V
V_{CEO}	Collector-Emitter Voltage	30	V
V_{EBO}	Emitter-Base Voltage	4	V
I_C	Collector Current -Continuous	50	mA
P_C	Collector Dissipation	150	mW
T_j, T_{stg}	Junction and Storage Temperature	-55~125	°C

Silicon Epitaxial Planar Transistor

2SC2715



ELECTRICAL CHARACTERISTICS @ Ta=25°C unless otherwise specified

Parameter	Symbol	Test conditions	MIN	TYP	MAX	UNIT
Collector-base breakdown voltage	$V_{(BR)CBO}$	$I_C=10\mu A, I_E=0$	35			V
Collector-emitter breakdown voltage	$V_{(BR)CEO}$	$I_C=1mA, I_B=0$	30			V
Emitter-base breakdown voltage	$V_{(BR)EBO}$	$I_E=10\mu A, I_C=0$	4			V
Collector cut-off current	I_{CBO}	$V_{CB}=35V, I_E=0$			0.1	μA
Emitter cut-off current	I_{EBO}	$V_{EB}=4V, I_C=0$			0.1	μA
DC current gain	h_{FE}	$V_{CE}=12V, I_C=2mA$	40		240	
Collector-emitter saturation voltage	$V_{CE(sat)}$	$I_C=10mA, I_B=1mA$			0.4	V
Base-emitter voltage	V_{BE}	$I_C=10mA, I_B=1mA$			1	V
Transition frequency	f_T	$V_{CE}=10V, I_C=1mA$	100		400	MHz
Collector-base output capacitance	C_{ob}	$V_{CB}=10V, I_E=0, f=1MHz$		2.0	3.2	MHz

CLASSIFICATION OF $h_{FE(1)}$

Rank	R	O	Y
Range	40-80	70-140	120-240
Marking	RR1	RO1	RY1

TYPICAL CHARACTERISTICS @ Ta=25°C unless otherwise specified

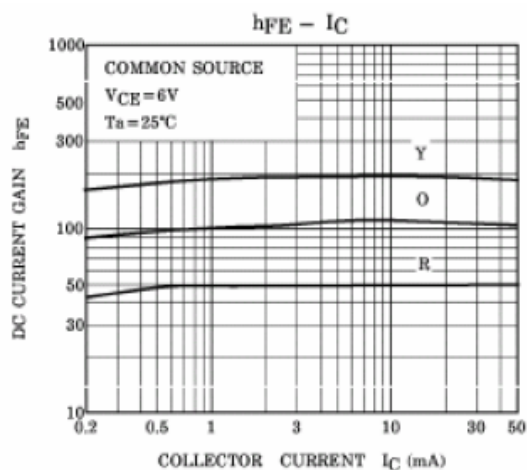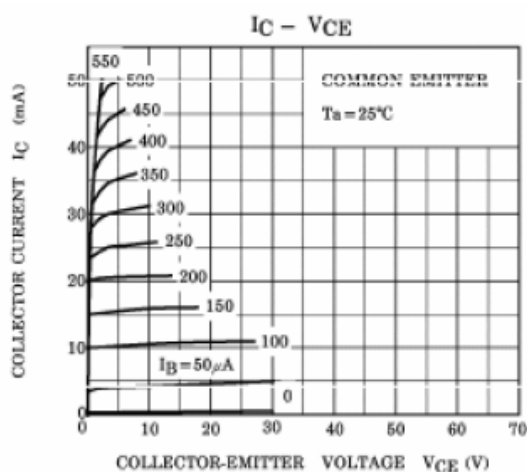


Silicon Epitaxial Planar Transistor

2SC2715


PACKAGE OUTLINE

Plastic surface mounted package

SOT-23

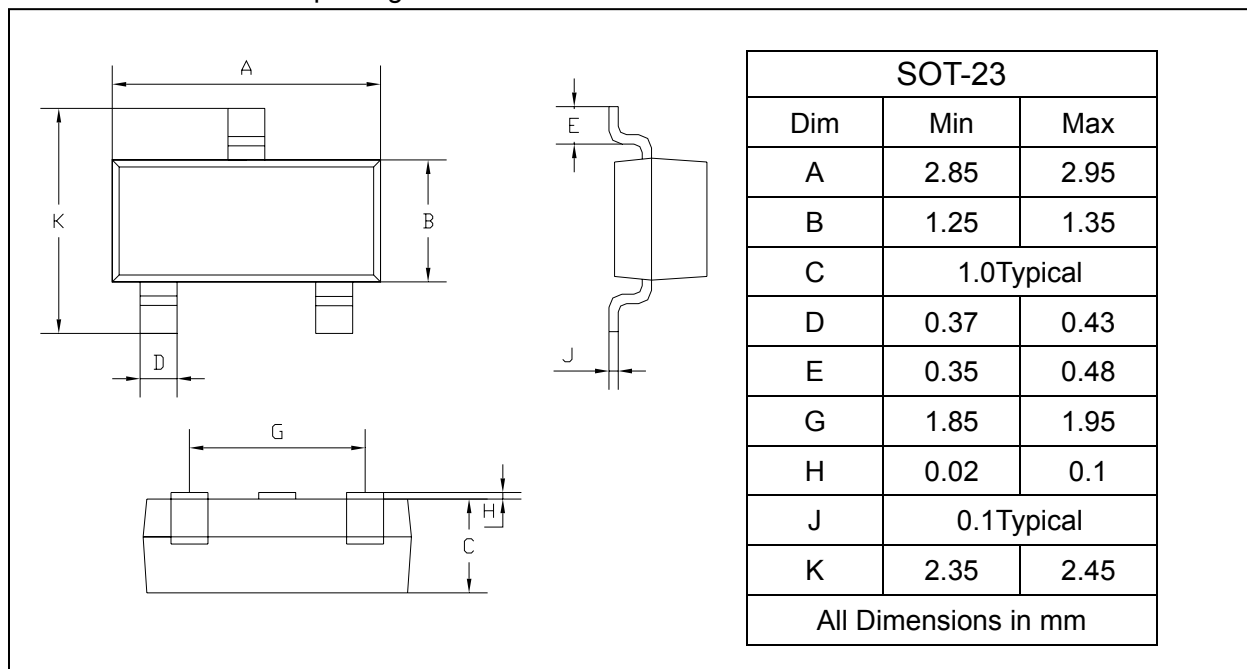

SOLDERING FOOTPRINT

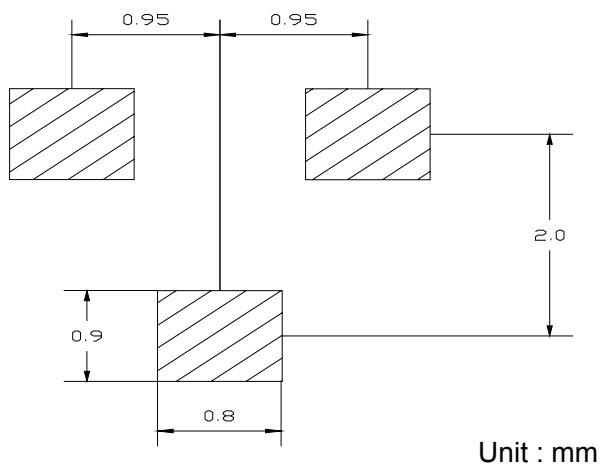

PACKAGE INFORMATION

Device	Package	Shipping
2SC2715	SOT-23	3000/Tape&Reel