


Schottky Barrier Diode**B5817W-B5819W****FEATURES**

- Extremely low V_F .
- Low stored charge, majority carrier conduction.
- Low power loss/high efficient

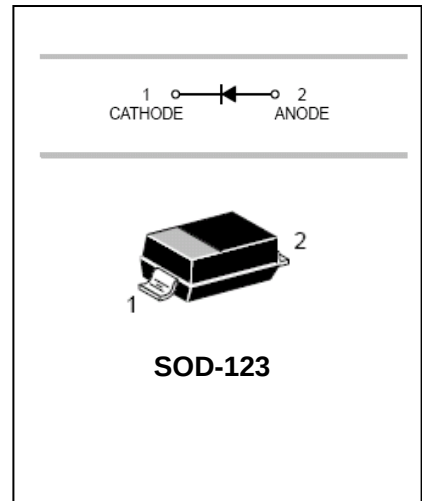

Lead-free

**APPLICATIONS**

- For Use In Low Voltage, High Frequency Inverters.
- Free Wheeling, And Polarity Protection Applications.

ORDERING INFORMATION



Type No.	Marking	Package Code
B5817W	SJ	SOD-123
B5818W	SK	SOD-123
B5819W	SL	SOD-123

MAXIMUM RATING @ $T_a=25^\circ\text{C}$ unless otherwise specified

Parameter	symbol	B5817W	B5818W	B5819W	Unit
Non-Repetitive Peak reverse voltage	V_{RSM}	24	36	48	V
Peak repetitive Peak reverse voltage Working Peak Reverse voltage DC Reverse Voltage	V_{RRM} V_{RWM} V_R	20	30	40	V
RMS Reverse Voltage	$V_{R(RMS)}$	14	21	28	V
Average Rectified output Current	I_o	1			A
Peak forward surge current@=8.3ms	I_{FSM}	25			A
Power Dissipation	P_d	250			mW
Thermal Resistance Junction to Ambient	$R_{\theta JA}$	80			$^\circ\text{C/W}$
Storage temperature	T_J, T_{STG}	-65~+125			$^\circ\text{C}$

Schottky Barrier Diode**B5817W-B5819W****ELECTRICAL CHARACTERISTICS @ Ta=25°C unless otherwise specified**

Parameter	Symbol	Test Condition	MIN	MAX	UNIT
Reverse breakdown voltage	$V_{(BR)}$	$I_R=1\text{mA}$ B5817W B5818W B5819W	20 30 40		V
Reverse voltage leakage current	I_R	$V_R=20\text{V}$ B5817W $V_R=30\text{V}$ B5818W $V_R=40\text{V}$ B5819W		1	mA
Forward voltage	V_F	B5817W $I_F=1\text{A}$ $I_F=3\text{A}$ B5818W $I_F=1\text{A}$ $I_F=3\text{A}$ B5819W $I_F=1\text{A}$ $I_F=3\text{A}$		0.45 0.75 0.55 0.875 0.6 0.9	V
Diode capacitance	C_D	$V_R=4\text{V}, f=1\text{MHz}$		120	pF

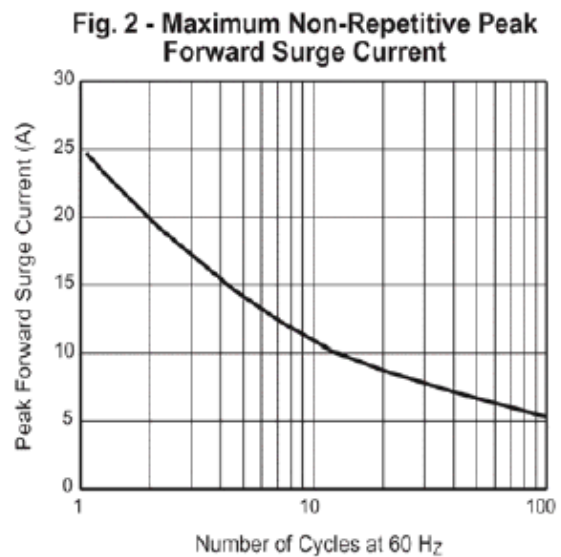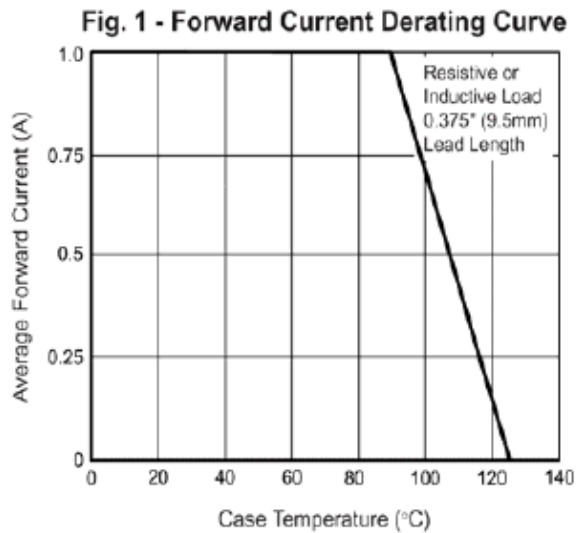TYPICAL CHARACTERISTICS @ Ta=25°C unless otherwise specified

Schottky Barrier Diode

B5817W-B5819W

Fig. 3 - Typical Instantaneous Forward Characteristics

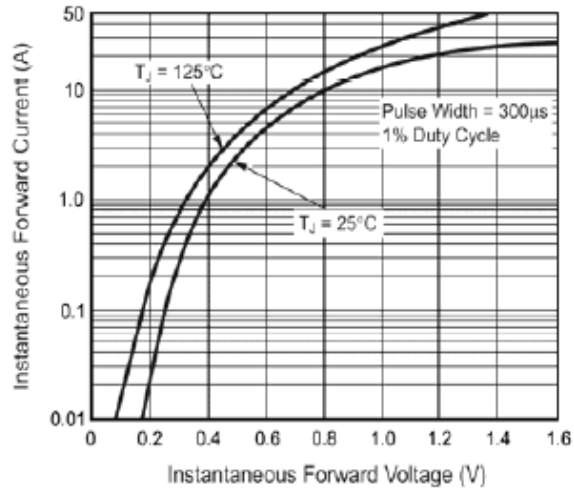


Fig. 4 - Typical Reverse Characteristics

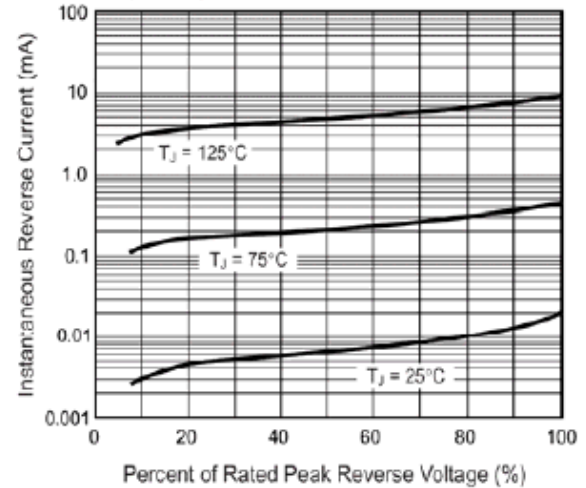


Fig. 5 - Typical Junction Capacitance


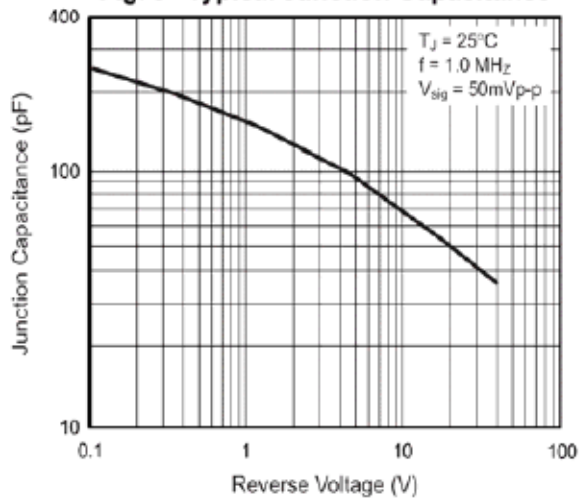


Fig. 6 - Typical Transient Thermal Impedance

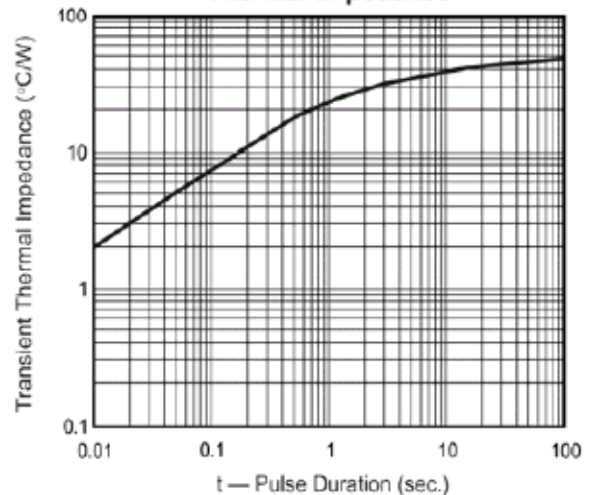


Schottky Barrier Diode

B5817W-B5819W


PACKAGE OUTLINE

Plastic surface mounted package

SOD-123

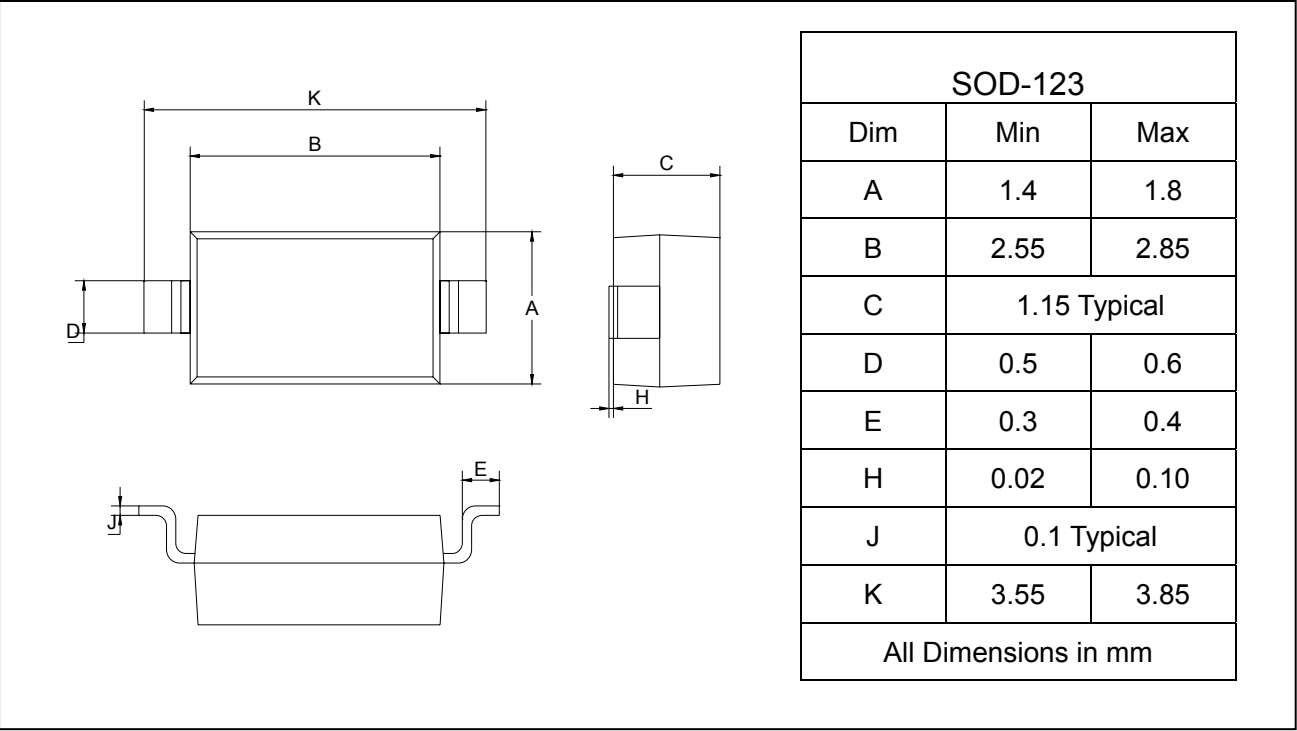

SOLDERING FOOTPRINT

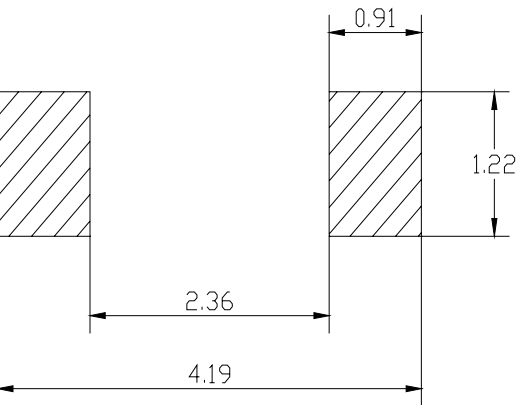

Unit: mm

PACKAGE INFORMATION

Device	Package	Shipping
B5817W-B5819W	SOD-123	3000/Tape&Reel