



PARA LIGHT ELECTRONICS CO., LTD

Tel: 886-2-2225-3733

Fax: 886-2-2225-4800

Mail: para@para.com.tw

Website: <http://www.para.com.tw>

LED T-8 Light Tube

Product Data Sheet

Part Number : T8F10W-CWE0-F

Rev.: A /0

Producer: Zhuang Wei

Auditing: Steven Chang

DRAWING NO. : DS-80-12-XXXX


DATE : 2012-9-19

Page : 1


◆ Product Features and Overview:

1. Extrude aluminum heat-sink with superior heat dissipating capability enables longer product life.
2. No glare design.
3. Using constant current driving circuit with power factor correction.
4. Using micro-chip shunt circuit driving technique to maximize efficacy.
5. Semiconductor light-emitting principle of power-saving than traditional fluorescent lamps about 70%
6. Long life. More than 20,000 hours.
7. Low radiated heat.
8. RoHS compliant. Mercury free.

◆ Photo:

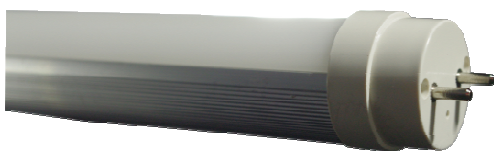

◆ Dimensions :

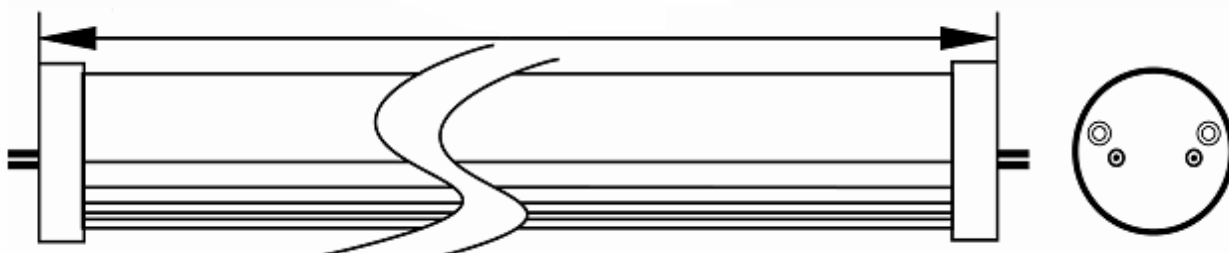 590 ± 1.5 

Unit: mm

◆ Electrical Characteristics:

Part Number	T8F10W-CWE0-F
Input Voltage Range	100V~240V
Input Current	130mA
LED Quantity	72Pcs
LED Type	PLCC 2835
Power Consumption	10W±10%

◆ Mechanical Characteristics:

Part Number	T8F10W-CWE0-F
Heat-Sink Specification	Aluminum
Cover Material	Diffused Plastic
PCB Material	R 1787
Power Supply	Internal
Socket Type	G13
Weight	158g

◆ Optical Characteristics:

Part Number	T8F10W-CWE0-F
Color Rendering Index	> 72
Luminous Flux	900±10% lm
Color Temperature	6000±500K

◆ Operation Conditions:

Operating Temp. Range	-20~40℃
Storage Temp. Range	-30~80℃

◆ Reliability Tests:

Item	Test Conditions
High temperature high humidity test	Temperature: 50℃, humidity: 85%, AC220V 96H
Aging test	Temperature: 40℃, AC220V 72H
On Off test	Temperature: 25℃,AC220V,turn on/off1500 times
Life test	Temperature: 25℃,AC220V,1000Hr

◆ Installation:


■ LED T-8 tube connection diagram



■ Retrofit Installation Procedures (Preformed by Professional Electrician only):

第一步：斷開電源。 Step 1 : Turn off the power.


第二步：取下日光燈。 Step 2 : Remove the fluorescent tube.

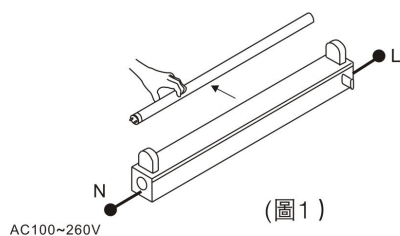

(圖1)


第三步：安裝LED燈管前請取下啟動器及鎮流器, 參照電路原理圖進行線路的改造。(圖3)

Step 3 : The starter & ballast must be removed before the installation of LED tube.
Please make a reference to circuit schematic diagram while change the Transmission Line.

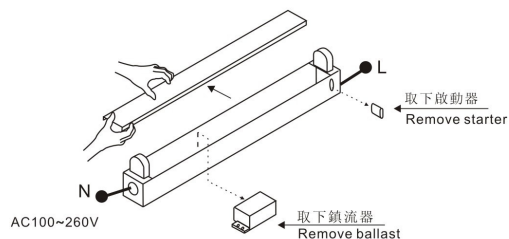


(圖2)

一、電感式

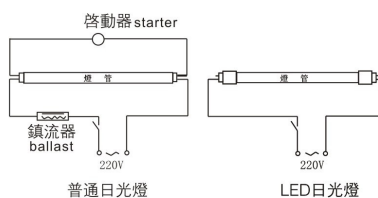

二、電子式

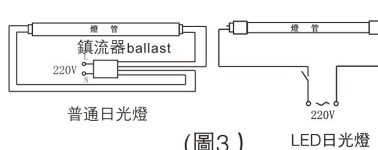

(圖3)

第四步：安裝上T8 LED燈管。 Step 4 : Install T8 LED tube.

