



- Universal AC input
- Protections: Short circuit/Over load/Over voltage
- Cooling by free air convection
- LED indicator for power on
- All using 105°C long life electrolytic capacitors
- High efficiency, long life and high reliability



Model Number	Output Volts	Output Amps	Ripple & Noise	Min Load	DC Volt Adjust	Load Reg	Volt Tolerance
--------------	--------------	-------------	----------------	----------	----------------	----------	----------------

SINGLE OUTPUT

RS25-3.3	3.3 Volts(DC)	6 Amps	80mV pk-pk	0~6Amps	2.85~3.6Volt(DC)	±2.0%	±3.0%
RS25-5	5 Volts(DC)	5 Amps	80mV pk-pk	0~5Amps	4.75~5.5Volt(DC)	±1.0%	±2.0%
RS25-12	12 Volts(DC)	2.1 Amps	120mV pk-pk	0~2.1Amps	10.8~13.2Volt(DC)	±0.5%	±1.0%
RS25-15	15 Volts(DC)	1.7 Amps	120mV pk-pk	0~1.7Amps	13.5~16.5Volt(DC)	±0.5%	±1.0%
RS25-24	24 Volts(DC)	1.1 Amps	120mV pk-pk	0~1.1Amps	22~27.6Volt(DC)	±0.5%	±1.0%
RS25-48	48 Volts(DC)	0.57 Amps	200mV pk-pk	0~0.57Amps	42~54Volt(DC)	±0.5%	±1.0%



25W Single Output Switching Power Supply

RS25 series

INPUT SPECIFICATIONS

Input Voltage Range	90~ 264 VAC; 125~373 Volts(DC)
Frequency Range	47-63 Hz
Inrush Current, typ: (cold start)	30Amps/230VAC
Input Current	0.7 Amps. @ 115VAC 0.4 Amps. @ 230VAC
Leakage current	<2mAmps /240VAC
Min Load	See Selection Chart

OUTPUT SPECIFICATIONS

Voltage and Current	See Selection Chart
Line Regulation (Note 3)	±0.5%
Load Regulation (Note 4)	See Selection Chart
Voltage Tolerance (Note2)	See Selection Chart
Ripple/Noise (Note 1)	See Selection Chart
Hold Up Time @ FL	80mS/230VAC 14mS/115VAC
Setup, Rise Time @ FL	1200ms, 23m/230VAC 2200mS, 30mS/115VAC
Over Voltage Protection	3.8 ~ 4.45Volt(DC): 3.3Volts(DC) 5.75 ~ 6.75Volt(DC): 5Volts(DC) 13.8 ~ 16.2Volt(DC): 12Volts(DC) 17.25 ~ 20.25Volt(DC): 15Volts(DC) 27.6~ 32.4Volt(DC): 24Volts(DC) 55.2~ 64.8Volt(DC): 48Volts(DC) Shut off o/p voltage, clamping zener diode
Over Current Protection	110 ~ 180% rated output power Hiccup mode, auto recover
DC Volt Adjust	See Selection Chart

GENERAL SPECIFICATIONS

Safety	UL60950-1, TUV EN60950-1 Approved
Insulation Resistance	≥100MΩ/500Volts(DC),25°C,70%RH
EMI	Compliance to EN55022 (CISPR22) Class B
Harmonic Current	Compliance to EN61000-3-2,-3

All specifications are typical at nominal input, full load, and 25°C unless otherwise noted

Efficiency	72% (RS25-3.3) 77% (RS25-5) 79% (RS25-12) 82% (RS25-15) 84% (RS25-24) 85%(RS25-48)
Isolation	3000VAC Input - Output 1500VAC Input - Ground 500VAC Output - Ground
EMS	Compliance to EN61000-4-2, 3, 4, 5, 6, 8, 11; ENV50204 light Industry Level, Criteria A

ENVIRONMENTAL SPECIFICATIONS

Oper. Temperature	-20°C to +70°C (See Derate Curve)
Storage Temperature	-40°C to +85°C, 10~95% RH
Relative Humidity	20~90% RH non cond
Temperature Coefficient	±0.03% / °C (0-50°C)
MTBF	309.7KHrs min,MIL-HDBK-217F(25°C)
Vibration	10~500Hz, 5G10min./1cycle, period for 60min. each along X, Y, Z axes

PHYSICAL SPECIFICATIONS


Size	
Millimeters	78 x 51 x 28
Inches	3.07" x 2.01 " x 1.10 "
Weight	7.05 oz (200g)

NOTE

1. Ripple & noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1uf & 47uf parallel capacitor.
2. Tolerance : includes set up tolerance, line regulation and load regulation.
3. Line regulation is measured from low line to high line at rated load.
4. Load regulation is measured from 0% to 100% rated load.

■ Mechanical Specification

Case No.931A Unit:mm

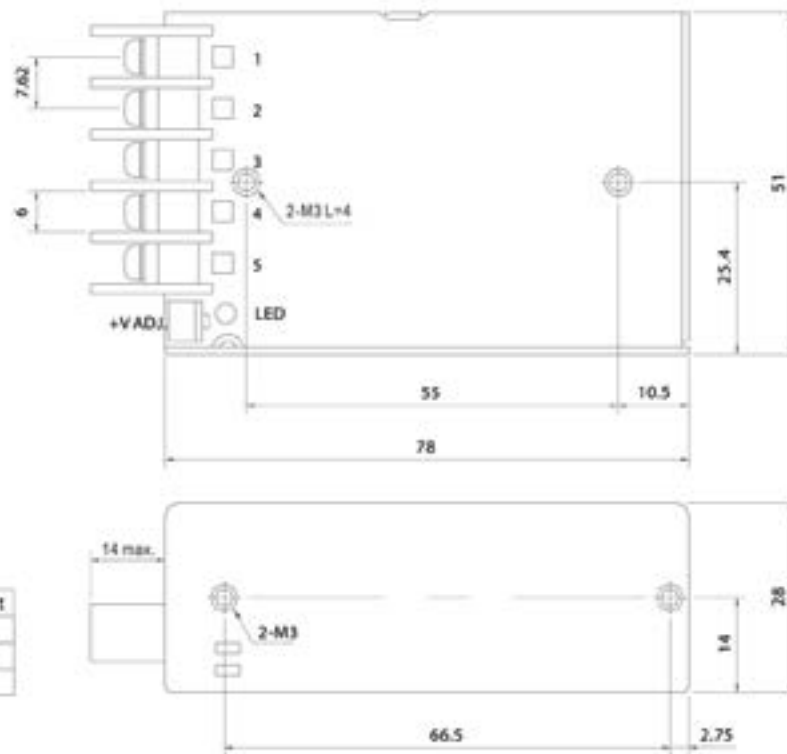


Terminal Pin No. Assignment


Pin No.	Assignment	Pin No.	Assignment
1	AC/L	4	DC OUTPUT -V
2	AC/N	5	DC OUTPUT +V
3	FG		

■ Block Diagram

fosc : 60KHz

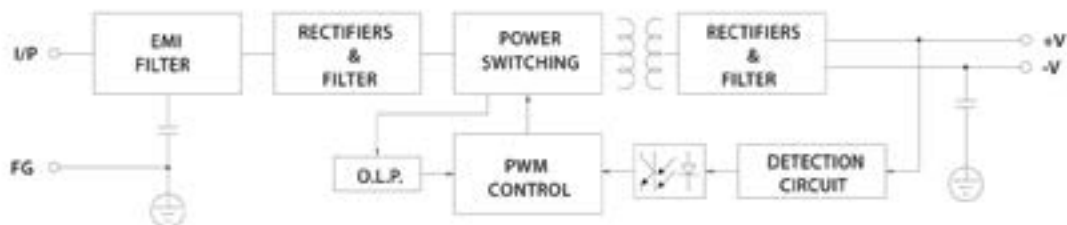

Derating Curve

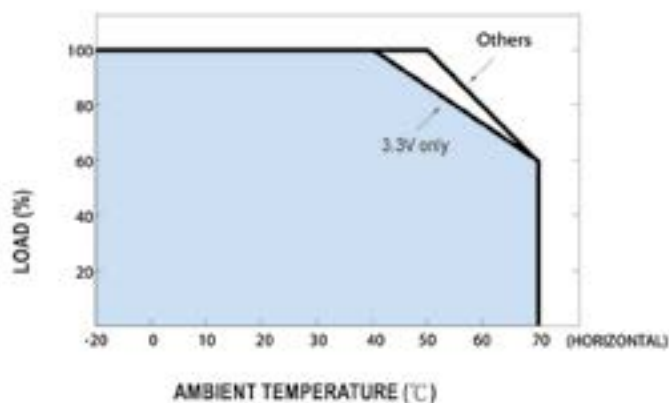

Static Characteristics (24V)

