



- Protections: Short circuit/Over load/Over voltage
- Cooling by free air convection
- LED indicator for power on
- All using 105°C long life electrolytic capacitors
- High efficiency, long life and high reliability



Model Number	Output Volts	Output Amps	Ripple & Noise	Min Load	Line Reg	Load Reg	Volt Tolerance
TRIPLE OUTPUT							
RT125-A	5 Volts(DC)	12 Amps	80mV pk-pk	2~15Amps	±0.5%	±1.0%	±2.0%
	12 Volts(DC)	5.5 Amps	120mV pk-pk	0.5~6Amps	±1.0%	±3.0%	+8,-3%
	-5 Volts(DC)	1.0 Amps	80mV pk-pk	0.1~1Amps	±1.0%	±6.0%	+6,-10%
RT125-B	5 Volts(DC)	12 Amps	80mV pk-pk	2~15Amps	±0.5%	±1.0%	±2.0%
	12 Volts(DC)	5.0 Amps	120mV pk-pk	0.5~6Amps	±1.0%	±3.0%	+8,-3%
	-12 Volts(DC)	1.0 Amps	120mV pk-pk	0.1~1Amps	±1.0%	±6.0%	±6.0%
RT125-C	5 Volts(DC)	10 Amps	80mV pk-pk	2~15Amps	±0.5%	±1.0%	±2.0%
	15 Volts(DC)	4.5 Amps	150mV pk-pk	0.5~6Amps	±1.0%	±3.0%	+8,-3%
	-15 Volts(DC)	1.0 Amps	150mV pk-pk	0.1~1Amps	±1.0%	±6.0%	±6.0%
RT125-D	5 Volts(DC)	8.0 Amps	80mV pk-pk	2~15Amps	±0.5%	±1.0%	±2.0%
	24 Volts(DC)	3.0 Amps	150mV pk-pk	0.4~4mps	±1.0%	±3.0%	±5.0%
	12 Volts(DC)	2.0 Amps	120mV pk-pk	0.1~2Amps	±1.0%	±6.0%	±6.0%



125W Triple Output Switching Power Supply

RT125 series

INPUT SPECIFICATIONS

Input Voltage Range	88~132 VAC / 176~264VAC selected by switch 248~373VDC
Frequency Range	47-63 Hz
Inrush Current, typ: (cold start)	40Amps / 230VAC
Input Current	3.0 Amps. @ 115VAC 2.0 Amps. @ 230VAC
Leakage current	< 2mAmps / 240VAC

OUTPUT SPECIFICATIONS

Voltage and Current	See Selection Chart
Line Regulation (Note 3)	See Selection Chart
Load Regulation (Note 4)	See Selection Chart
Voltage Tolerance (Note 2)	See Selection Chart
Ripple/Noise (Note 1)	See Selection Chart
Hold Up Time @ FL	25mS/230VAC 30mS/115VAC
Setup, Rise Time @ FL	500ms, 20m/230VAC 1200mS, 30mS/115VAC
Over Voltage Protection	5Volts only: : 5.75 ~ 6.75VDC Hiccup mode, auto recov
Over Current Protection	110 ~ 150% rated output power Hiccup mode, auto recov
DC Volt Adjust	5Volts only: 4.75 ~ 5.5Volts(DC)

GENERAL SPECIFICATIONS

Safety	UL60950-1, TUV EN60950-1 Approved
Insulation Resistance	≥ 100MΩ / 500Volts (DC)
EMI	Compliance to EN55022 (CISPR22) Class B
Harmonic Current	Compliance to EN61000-3-2,-3
Efficiency	79% (RT125-A) 80% (RT125-B) 81% (RT125-C) 82% (RT125-D)
Isolation	3000VAC Input - Output 1500VAC Input - Ground 500VAC Output - Ground

All specifications are typical at nominal input, full load, and 25°C unless otherwise noted

EMS	Compliance to EN61000-4-2, 3, 4, 5, 6, 8, 11; ENV50204, EN61000-6-2(EN50082-2) Heavy Industry Level, Criteria A
-----	--

ENVIRONMENTAL SPECIFICATIONS

Oper. Temperature	-25°C to +70°C (See Derate Curve)
Storage Temperature	-40°C to +85°C, 10~95%RH
Relative Humidity	20~90% RH non cond
Temperature Coefficient	0.03% / °C (0-50°C) on +5V output
MTBF	209.3 KHrs min, MIL-HDBK-217(25 °C)
Vibration	10~500Hz, 5G10min./1cycle, period for 60min. each along X, Y, Z axes

PHYSICAL SPECIFICATIONS


Size	
Millimeters	199 x 98 x 38
Inches	7.83" x 3.86" x 1.50"
Weight	24.69 oz (700g)

NOTE

1. Ripple & noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1uf & 47uf parallel capacitor.
2. Tolerance : includes set up tolerance, line regulation and load regulation.
3. Line regulation is measured from low line to high line at rated load.
4. Load regulation is measured from 20% to 100% rated load, and other output at 60% rated load.
5. Each output can work within current range. But total output power can't exceed rated output power.

■ Mechanical Specification


Case No. 902A Unit:mm

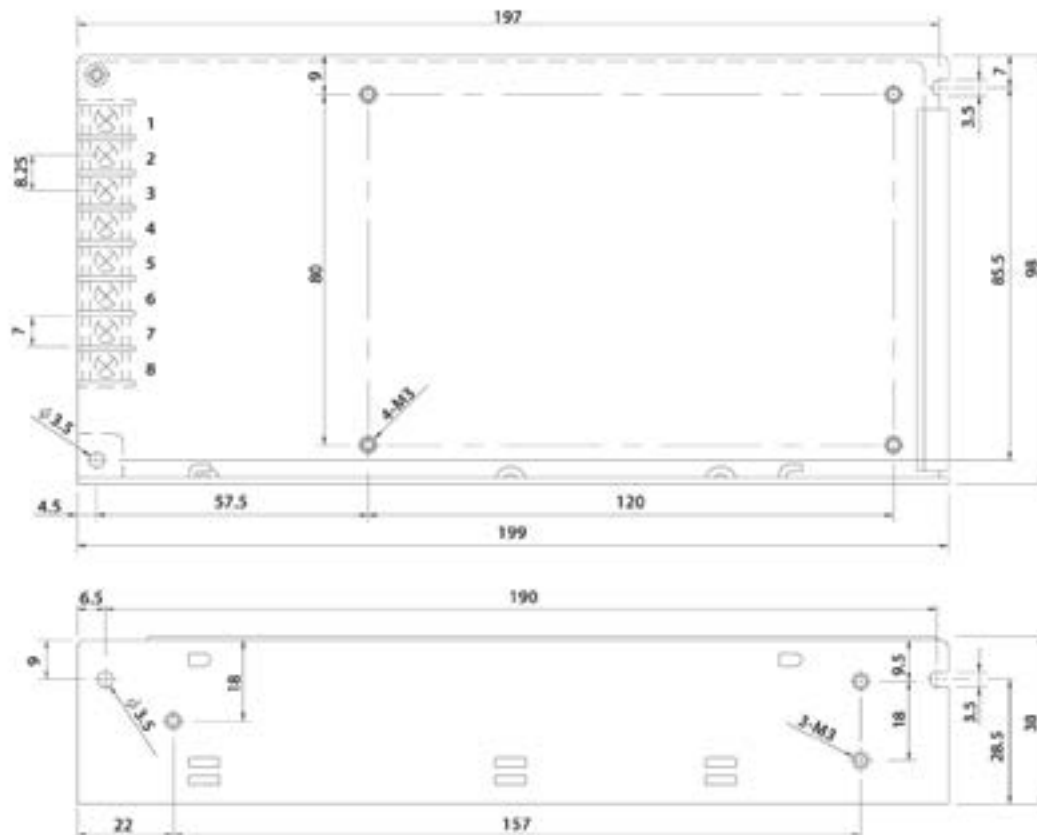

Terminal Pin No. Assignment

Pin No.	Assignment	Pin No.	Assignment	Pin No.	Assignment
1	AC/L	4	NC	7	DC OUTPUT COM
2	AC/N	5	DC OUTPUT V3	8	DC OUTPUT +V1
3	FG $\div$	6	DC OUTPUT +V2		

■ Derating Curve

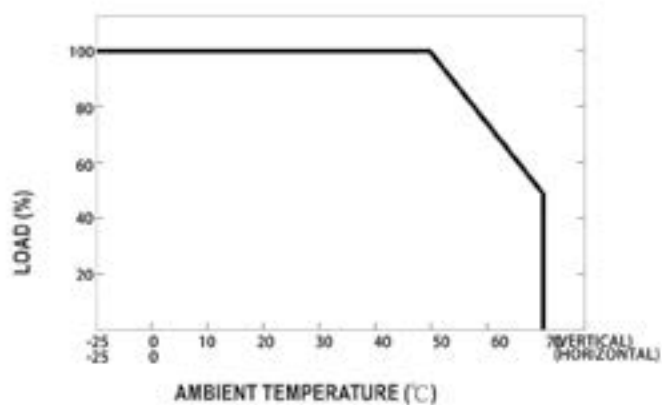

■ Static Characteristics

