

- Universal 90-264VAC Input
- High Efficiency
- Regulated Outputs
- 3000V Isolation
- Single Outputs
- UL60950 & EN60950 Approved

2.75"W x 1.89"L x 0.91"H



Model Number	Output Voltage	Output Amps(max)	Ripple pk-pk	Efficiency
<b>SINGLE OUTPUT</b>				
LFM15-3.3	3.3 VDC	3A	50mV	70%
LFM15-5	5 VDC	3A	1%	73%
LFM15-9	9 VDC	1.67A	1%	75%
LFM15-12	12 VDC	1.25A	1%	80%
LFM15-15	15VDC	1A	1%	80%
LFM15-24	24VDC	0.63A	1%	82%

**INPUT SPECIFICATIONS**

Input Voltage Range	90-264 VAC
Frequency Range	47-63 Hz
Inrush Current, typ:	20A@100V, 40A@200V Input *
Leakage Current	0.25mA

**OUTPUT SPECIFICATIONS**

Voltage and Current	See Selection Chart
Load Regulation (10%-FL)	+/- 1%
Line Regulation (LL-HL, FL)	+/- 0.5%
Voltage Accuracy	+/- 1%
Temperature Coefficient	+/-0.05%/°C
Ripple/Noise	See Selection Chart
Short Circuit Protection	Continuous
Hold Up Time	16 mS, typ @ 115VAC

**GENERAL SPECIFICATIONS**

Input-Out Isolation	3000VAC
Efficiency	See Selection Chart
Safety	UL60950, EN60950

**PHYSICAL SPECIFICATIONS**

Size	2.75" x 1.89" x 0.91"
Construction	Open Frame
Weight	2.5oz (71g)


**ENVIRONMENTAL SPECIFICATIONS**

Oper. Temperature	0 to +40°C
Cooling	Free Air Convection
Storage Temperature	-20 to +85°C *

All specifications are typical at nominal input, full load, and 25DegC unless otherwise noted

\* These are stress ratings. Exposure of the devices to any of these conditions may adversely affect long term reliability. Proper operation under conditions other than the standard operating conditions is neither warranted nor implied.

**MECHANICAL SPECIFICATIONS**

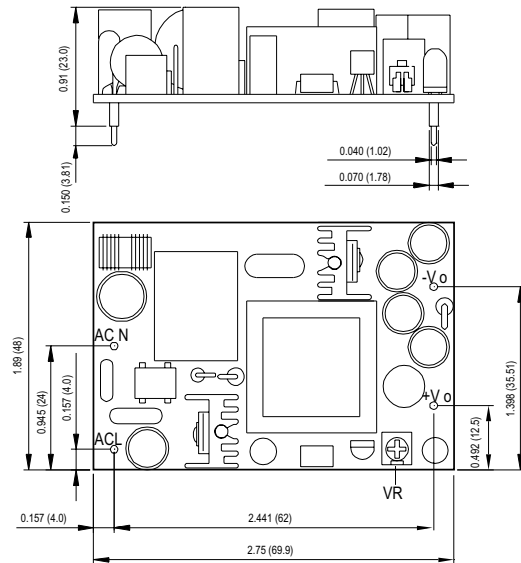

**NOTES:**

- 1) Add a 0.1uF ceramic capacitor and a 10uF E.L.capacitor to output for Ripple & Noise (R & N) measuring @ 20MHz BW.