



CSS124P Series SMD WIRE WOUND POWER INDUCTORS (SHIELDED)




Rev. A

A. Electrical Specifications:

P/N	Marking	Inductance (μ H)	Test Freq. (KHz)	DCR Max. (m Ω)	Rated Current (A)
CSS124P-3R9M	3R9	3.9	100	15	6.50
CSS124P-4R7M	4R7	4.7	100	18	5.70
CSS124P-6R8M	6R8	6.8	100	23	4.90
CSS124P-8R2M	8R2	8.2	100	26	4.60
CSS124P-100M	100	10	100	28	4.50
CSS124P-120M	120	12	100	38	4.00
CSS124P-150M	150	15	100	50	3.20
CSS124P-180M	180	18	100	57	3.10
CSS124P-220M	220	22	100	66	2.90
CSS124P-270M	270	27	100	80	2.80
CSS124P-330M	330	33	100	97	2.70
CSS124P-390M	390	39	100	132	2.10
CSS124P-470M	470	47	100	150	1.90
CSS124P-560M	560	56	100	190	1.80
CSS124P-680M	680	68	100	220	1.50
CSS124P-820M	820	82	100	260	1.30
CSS124P-101M	101	100	100	308	1.20
CSS124P-121M	121	120	100	380	1.10
CSS124P-151M	151	150	100	530	0.95
CSS124P-181M	181	180	100	620	0.85
CSS124P-221M	221	220	100	700	0.80
CSS124P-271M	271	270	100	870	0.60
CSS124P-331M	331	330	100	990	0.50

B. Dimensions: mm (Inch)

Series	a	b	c	d	e	f	g	h
CSS124P	12.0 (0.472)	12.0 (0.472)	4.8 (0.189)	5.0 (0.197)	8.4 (0.331)	5.4 (0.213)	2.8 (0.110)	7.0 (0.276)
Tol.	± 0.3 (0.012)	± 0.3 (0.012)	Max.	Typ.	Typ.	Typ.	Typ.	Typ.



C. General Information:

1. CSS124P-xxx, "CSS124P" = P/N, "xxx" = Inductance, " _ " = Tolerance.
2. Tolerance " _ ": N = $\pm 30\%$, M = $\pm 20\%$, L = $\pm 15\%$.
3. Operating temperature range: -30°C to $+100^{\circ}\text{C}$ (Including self-heating).
4. Storage temperature: -40°C to $+85^{\circ}\text{C}$.
5. Inductance measured using the HP4284A and Chroma1320 & 3302.
6. DCR measured using Chroma 16502 milliohm meter.
7. Inductance drop no more than 25% of initial value at rated current, temperature rise $\Delta t < 40^{\circ}\text{C}$.
8. Inductance and Current range: From $3.9\mu\text{H}$ (6.50A) to $330.0\mu\text{H}$ (0.50A).
9. MSL: Level 1.

D. Applications:

1. Game Consoles
2. Set Top Boxes
3. Cables Modems
4. Computers
5. Mobile Communication Devices (Cell Phones, Radios, etc.)
6. PDA, LCD, DVD, BRP, HD.




CSS124P Series SMD WIRE WOUND POWER INDUCTORS (SHIELDED)

Rev. A

E. Characteristics Curve:

Inductance vs. Frequency

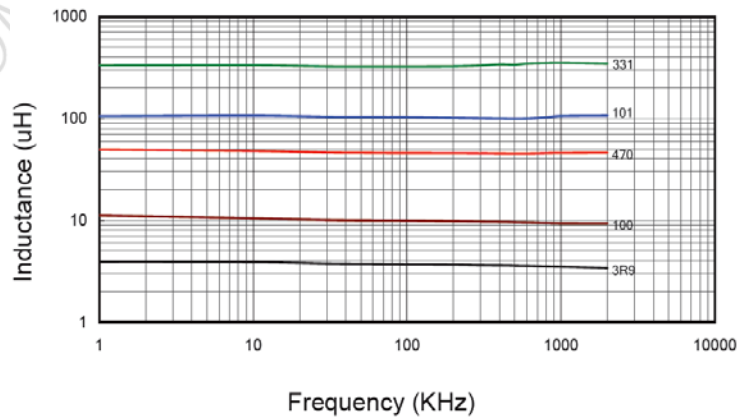

Inductance vs. DC Current

