



CSS0211P Series SMD WIRE WOUND POWER INDUCTORS (SHIELDED)





Rev. A

A. Electrical Specifications:

P/N	Marking	Inductance (μ H)	Test Freq. (KHz)	DCR Max. (m Ω)	Rated Current (mA)	I sat (mA)
CSS0211P-1R5N	1R5	1.5	100	68	1480	900
CSS0211P-2R2N	2R2	2.2	100	98	1270	780
CSS0211P-3R3N	3R3	3.3	100	123	1020	600
CSS0211P-4R7N	4R7	4.7	100	170	880	500
CSS0211P-6R8N	6R8	6.8	100	260	800	440
CSS0211P-100N	100	10.0	100	400	650	350

B. Dimensions: mm (Inch)

Series	a	b	c	d	e	f	g	h	i	k
CSS0211P	3.2 (0.126)	3.2 (0.126)	1.2 (0.047)	$\varnothing$ 2.1 (0.083)	3.3 (0.130)	1.0 (0.039)	1.3 (0.051)	1.7 (0.067)	1.3 (0.051)	4.3 (0.169)
Tol.	Max.	Max.	Max.	$\pm$ 0.1 (0.004)	Typ.	Typ.	Typ.	Typ.	Typ.	Typ.



C. General Information:

1. CSS0211P-xxx, "CSS0211P" = P/N, "xxx" = Inductance, "_" = Tolerance.
2. Tolerance "_": N: $\pm$ 30%, M: $\pm$ 20%, L: $\pm$ 15%.
3. Operating temperature range: -30°C to +100°C (Including self-generated heat).
4. Storage temperature: -40°C to +85°C.
5. Inductance measured using the HP4284A and Chroma1320 & 3302.
6. DCR measured using Chroma 16502 milliohm meter.
7. Inductance drop no more than 35% of initial value at Isat, temperature rise $\Delta t < 40^\circ\text{C}$ at rated current.
8. Inductance and Current range: From 1.5 μ H (1480 mA) to 10.0 μ H (650mA).
9. MSL: Level 1.

D. Applications:

1. Game Consoles
2. Set Top Boxes
3. Cables Modems
4. Computers
5. Mobile Communication Devices (Cell Phones, Radios, etc.)
6. PDA, LCD, DVD, BRP, HD.




CSS0211P Series SMD WIRE WOUND POWER INDUCTORS (SHIELDED)

Rev. A

E. Characteristics Curve:

Inductance vs. Frequency

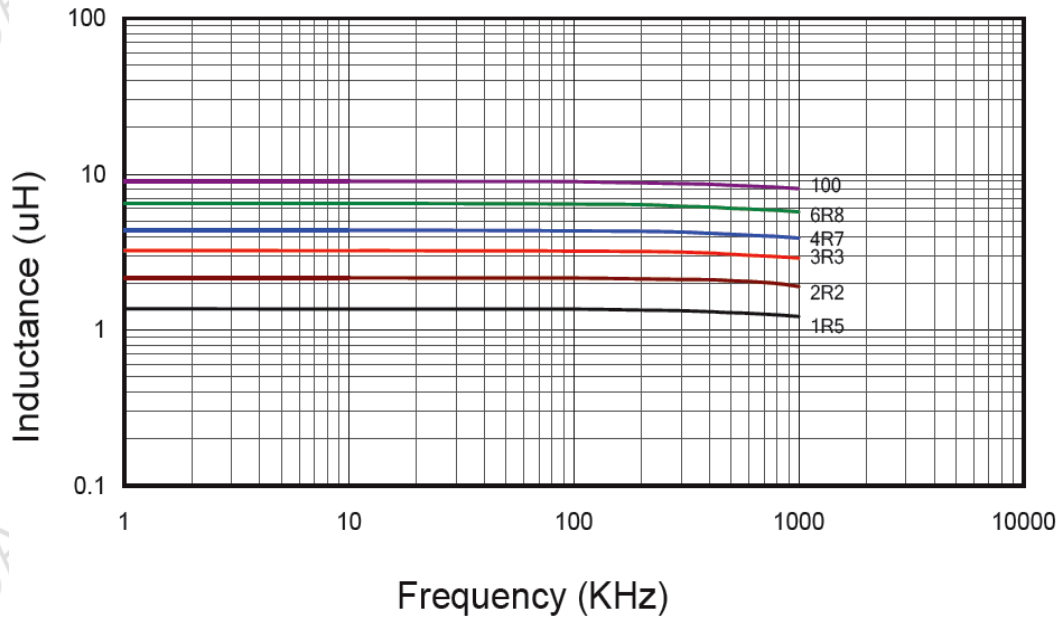

Inductance vs. DC Current

