



CSN043D Series SMD WIRE WOUND POWER INDUCTORS (UNSHIELDED)


Rev. A

A. Electrical Specifications:

P/N	Marking	Inductance (μ H)	Test Freq. (KHz)	DCR Max. (Ω)	Rated Current (A)
CSN043D-1R0M	1R0	1.0	100	0.0487	2.56
CSN043D-1R4M	1R4	1.4	100	0.0562	2.52
CSN043D-1R8M	1R8	1.8	100	0.0637	1.95
CSN043D-2R2M	2R2	2.2	100	0.0712	1.75
CSN043D-2R7M	2R7	2.7	100	0.0787	1.58
CSN043D-3R3M	3R3	3.3	100	0.0862	1.44
CSN043D-3R9M	3R9	3.9	100	0.0937	1.33
CSN043D-4R7M	4R7	4.7	100	0.1087	1.15
CSN043D-5R6M	5R6	5.6	100	0.1257	0.99
CSN043D-6R8M	6R8	6.8	100	0.1312	0.95
CSN043D-8R2M	8R2	8.2	100	0.1462	0.84
CSN043D-100M	100	10	100	0.182	1.04
CSN043D-120M	120	12	100	0.210	0.97
CSN043D-150M	150	15	100	0.235	0.85
CSN043D-180M	180	18	100	0.338	0.74
CSN043D-220M	220	22	100	0.378	0.68
CSN043D-270M	270	27	100	0.522	0.62
CSN043D-330K	330	33	100	0.540	0.56
CSN043D-390K	390	39	100	0.587	0.52
CSN043D-470K	470	47	100	0.844	0.44
CSN043D-560K	560	56	100	0.937	0.42
CSN043D-680K	680	68	100	1.117	0.37
CSN043D-331K	331	330	10	3.350	0.10

B. Dimensions: mm (Inch)

Series	a	b	c	d	e	f	g
CSN043D	4.0 (0.157)	4.5 (0.177)	3.2 (0.126)	1.2 (0.047)	4.5 (0.177)	1.5 (0.059)	1.75 (0.069)
Tol.	± 0.3 (0.012)	± 0.3 (0.012)	± 0.3 (0.012)	Typ.	Typ.	Typ.	Typ.

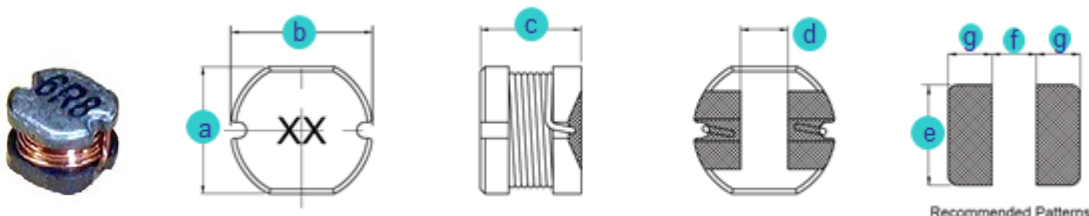

C. General Information:

1. CSN043D-xxx_, "CSN043D" = P/N, "xxx" = Inductance, "_" = Tolerance.
2. Tolerance "_": M: $\pm 20\%$, L: $\pm 15\%$, K = $\pm 10\%$.
3. Operating temperature range: -30°C to $+100^{\circ}\text{C}$ (Including self-heating).
4. Storage temperature: -40°C to $+85^{\circ}\text{C}$.
5. Inductance measured using the HP4284A and Chroma1320 & 3302.
6. DCR measured using Chroma 16502 milliohm meter.
7. Inductance drop no more than 10% of initial value at rated current, temperature rise $\Delta t < 40^{\circ}\text{C}$.
8. Inductance and Current range: From 1.0 μH (2.56A) to 330.0 μH (0.10A).
9. MSL: Level 1.

D. Applications:

1. Game Consoles
2. Set Top Boxes
3. Cables Modems
4. Computers
5. Mobile Communication Devices (Cell Phones, Radios etc.)
6. PDA, LCD, DVD, BRP, HD




CSN043D Series SMD WIRE WOUND POWER INDUCTORS (UNSHIELDED)

Rev. A

E. Characteristics Curve:

Inductance vs. Frequency

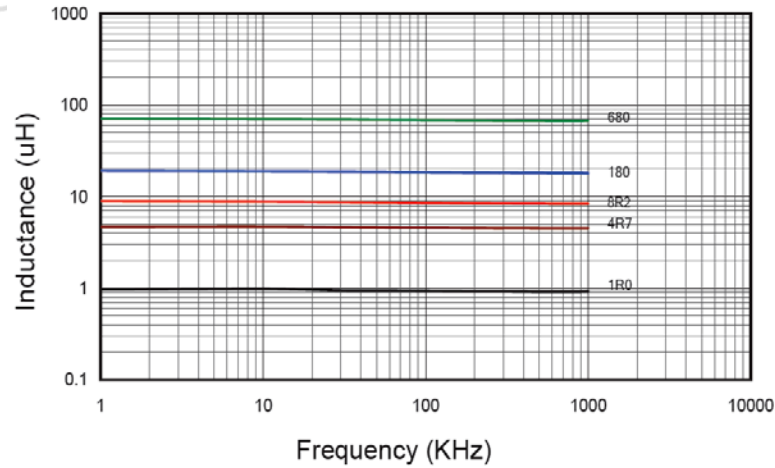

Inductance vs. DC Current

