



AT2450A3104AT ANTENNA SPECIFICATION

Rev. A


PRODUCT FEATURES

1. Surface mount ceramic antenna with a small size of 8.0 X 1.0 X 0.8 mm.
2. Highly stable under temperature and humidity changes.
3. Superior performance in a compact size, RoHS compliant.

RF CHARACTERISTICS

PN AT2450A3104AT	Specification
Working Frequency Range	2.4-2.5GHz
Gain	2.0 dBi(Typical)
Return Loss	-10 dB min
Polarization	Linear
Radiation Pattern	Omni-directional
Impedance	50Ω
Rated Power	3W max
Operating Temperature	-40°C to +85°C

PHYSICAL DIMENSIONS

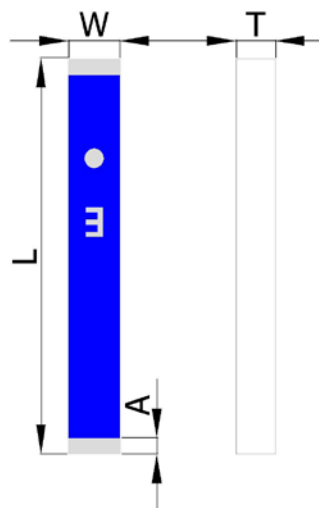


Symbol	Dimension (mm)
L	8.00 ± 0.20
W	1.05 ± 0.20
T	0.80 ± 0.10
A	0.30 ± 0.20

TERMINAL CONFIGURATION



PIN	Connection
P1	Feeding
P2	Soldering terminal

PCB DESIGN/LAYOUT CONSIDERATION

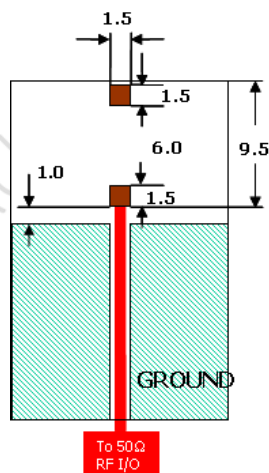

Unit : mm



Soldering Pad





Ground



50 Ω Transmission Line

TEST BOARD DESIGN

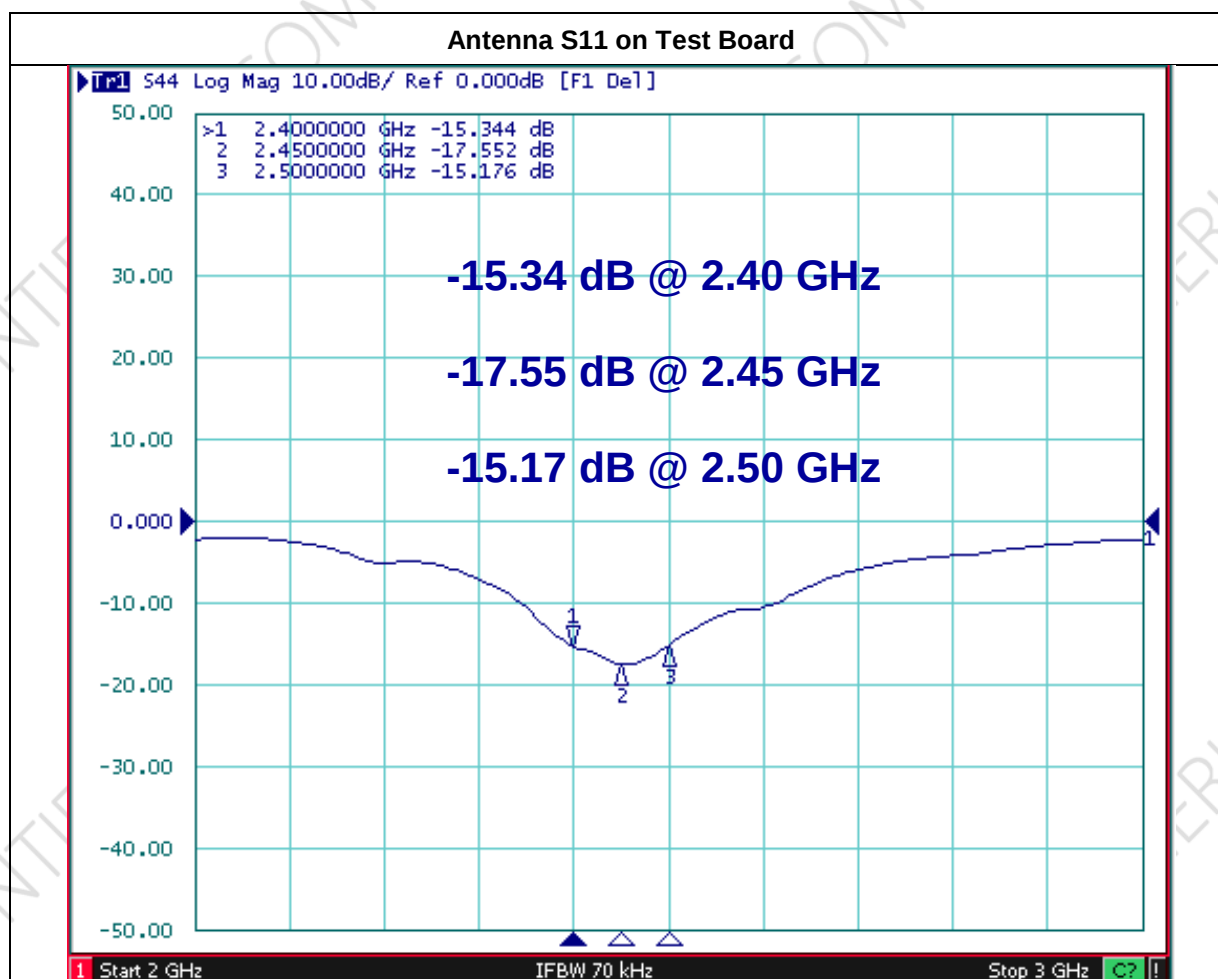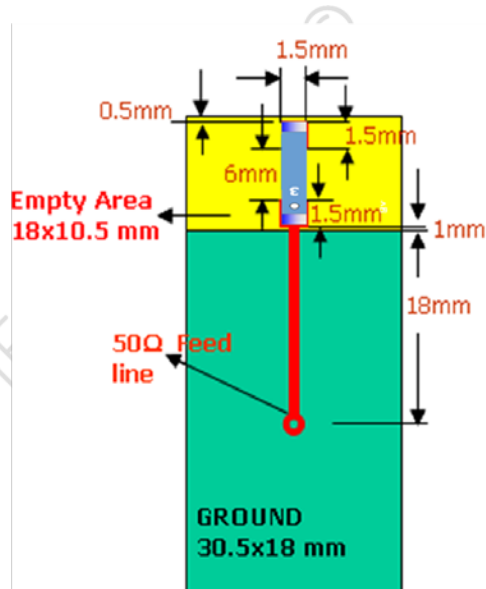



AT2450A3104AT ANTENNA SPECIFICATION

Rev. A

RADIATION PATTERNS

The test board orientation is defined as:

