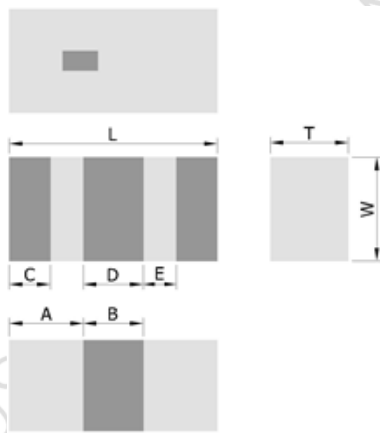


**PRODUCT FEATURES**


1. Surface mount band pass filter with a small size of 1.6 X 0.8 X 0.6 mm, RoHS compliant.
2. Provide low insertion loss, and high rejection rate.
3. Highly stable under temperature and humidity changes.

RF CHARACTERISTICS

P/N BP2500F0603AT	Specification
Frequency range	2400 - 2500 MHz
Insertion Loss (max)	2.5 dB max at +25°C 2.8 dB max at -40°C to +85°C
VSWR	2.0 max
Impedance	50 Ω
Attenuation (min.)	38 dB @ 880 - 915 MHz 40 dB @ 1710 - 1850 MHz 40 dB @ 1850 - 1910 MHz 35 dB @ 1920 - 1990 MHz 25 dB @ 2170 MHz 30 dB @ 4800 - 5000 MHz 20 dB @ 7200 - 7500 MHz
Operating temperature range	-40°C to +85°C

PHYSICAL DIMENSIONS


Symbol	Dimension (mm)
L	1.60 $\pm$ 0.15
W	0.80 $\pm$ 0.15
T	0.60 $\pm$ 0.10
A	0.55 $\pm$ 0.15
B	0.50 $\pm$ 0.15
C	0.35 $\pm$ 0.15
D	0.50 $\pm$ 0.15
E	0.20 $\pm$ 0.15

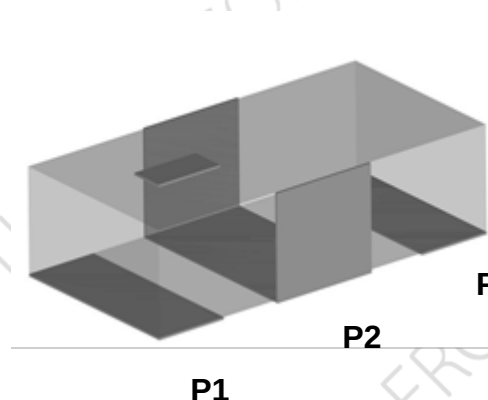TERMINAL CONFIGURATION

PIN	Definition
P1	INPUT
P2	GND
P3	OUTPUT



PCB DESIGN/LAYOUT CONSIDERATION

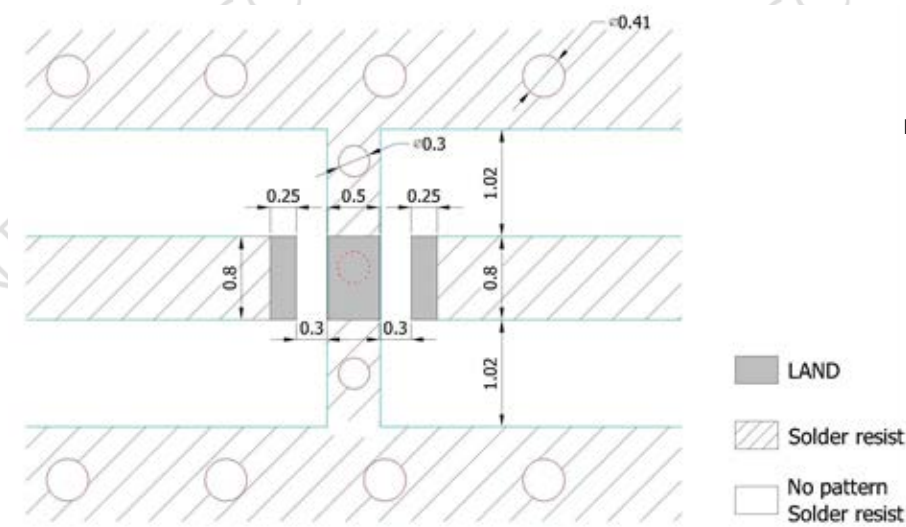

Typical RF Performance

