




PRODUCT FEATURES

1. Surface mount band pass filter with a small size of 2.5 X 2.0 X 1.0 mm, RoHS compliant.
2. Provide low insertion loss and high rejection rate.
3. Highly stable under temperature and humidity changes.

RF CHARACTERISTICS


P/N BP2500A1008GT	Specification
Frequency range	2400 - 2500 MHz
Insertion Loss (max)	2.0 dB at +25°C
VSWR	2.0 max
Impedance	50 Ω
Attenuation (min.)	40dB @ 900MHz 30dB @ 1990 MHz 20dB @ 2100 MHz 35dB @ 3200 MHz 40dB @ 4800 MHz 25dB @ 7200 MHz (reference)
Operating temperature range	-40°C to +85°C

PHYSICAL DIMENSIONS

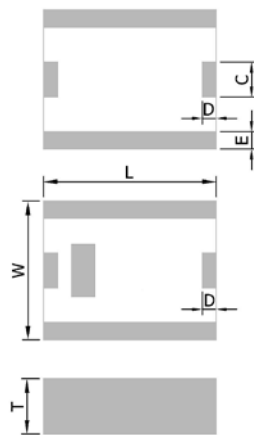


Symbol	Dimension (mm)
L	2.50 $\pm$ 0.20
W	2.00 $\pm$ 0.20
T	1.00 $\pm$ 0.10
A, E	0.20 $\pm$ 0.20
B	0.55 $\pm$ 0.20
C	0.50 $\pm$ 0.20
D	0.25 $\pm$ 0.20

TERMINAL CONFIGURATION




PIN	Definition
P1	Input/Output
P2	GND
P3	Output/Input
P4	GND

PCB DESIGN/LAYOUT CONSIDERATION

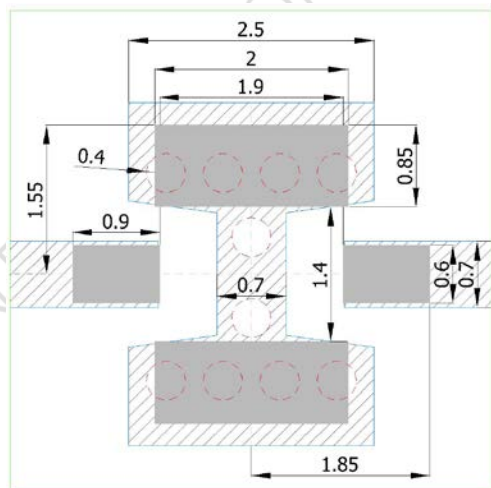

Unit:mm



Note:

- Design trace width to be 50 Ω impedance.



Typical RF Performance

