


1000 BASE -T DUAL PORT MAGNETICS MODULES

P/N: VP4015 LF DATA SHEET

Page : 1/2

Feature

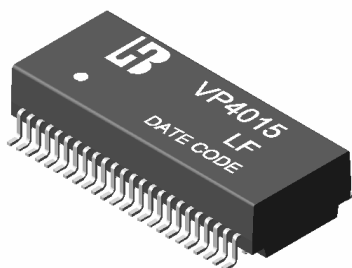

- IEEE 802.3af/ANSI X3.263 compliant performance.
- Suitable for End-span POE applications with 350mA current capability.
- Cable interface for isolation and low common mode emissions.
- Comply with RoHS requirements-whole part No Cd, No Hg, No Cr6+, No PBB and PBDE and No Pb on external pins.
- Operating temperature range: 0°C to +70°C.
- Storage temperature range: -25°C to +125°C.


Electrical Specifications @ 25°C

Part Number	Turns Ratio (±5%)		OCL (uH Min) @100KHz/0.1V with 8mA DC Bias	Cross talk Attenuation (dB Min)			HI-POT (Vrms)
	TX	RX		30MHz	60MHz	100MHz	
VP4015 LF	1CT:1CT	1CT:1CT	350	-40	-35	-30	1500

Continue

Part Number	Insertion Loss (dB Max)	Return Loss (dB Min)@ Load 100Ω					DCMR (dB Min)		
	1-100MHz	1-30MHz	40MHz	50MHz	60-80MHz	100MHz	30MHz	60MHz	100MHz
VP4015 LF	-1.0	-18	-14.4	-13.1	-12	-10	-43	-37	-33

Schematic

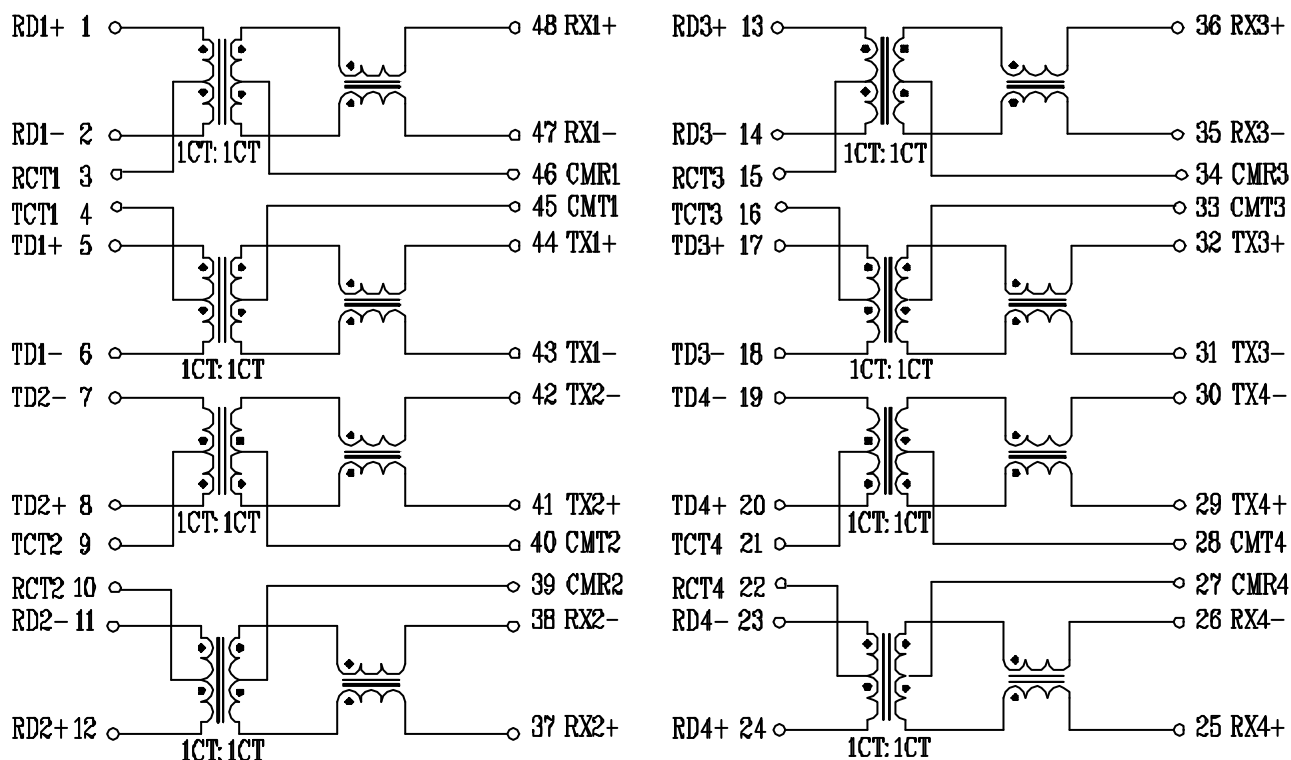


A8(08/01)

1000 BASE -T DUAL PORT MAGNETICS MODULES

P/N: VP4015 LF DATA SHEET

Page : 2/2

Mechanical

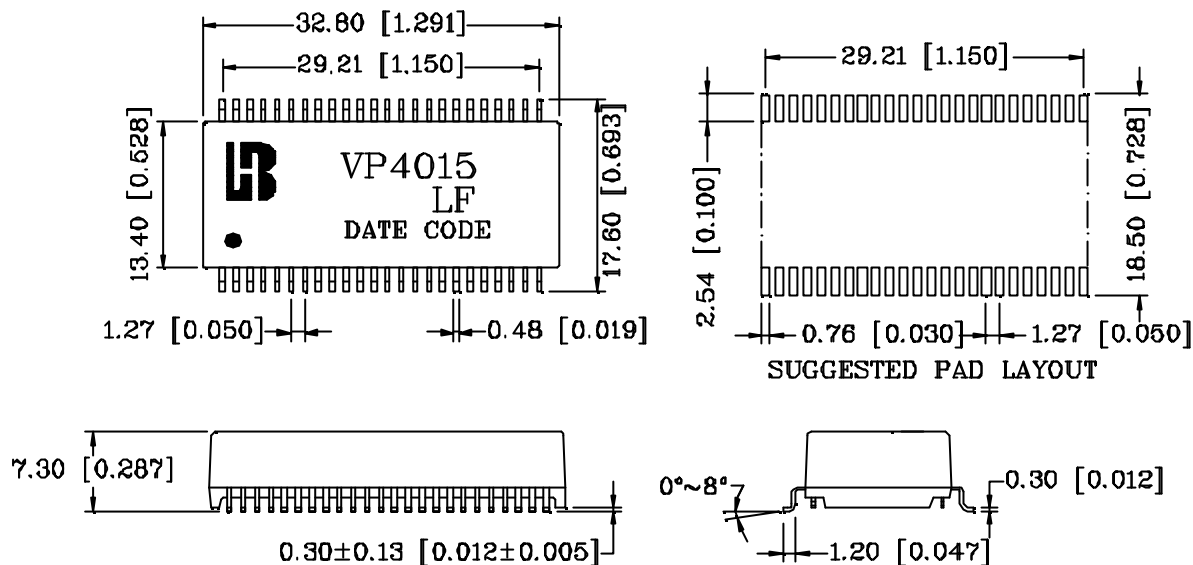

Units: mm[Inches] all Tolerance xx.x0±0.25[0.010]

0.xx±0.05[0.002]