

External Wireless Dipole Desktop LTE Antenna



DBS6950 EXTERNAL WIRELESS DIPOLE DESKTOP LTE ANTENNA

The DBS6950 Antenna is designed for LTE (Long Term Evolution) applications, which provides a new high performance air interface for cellular mobile communication systems. It is the last step toward the 4th generation (4G) of radio technologies, which is designed to increase the capacity and speed of mobile telephone networks. Laird's external desktop type antennas feature wide bandwidth as that covers the 700 MHz to 960 MHz and 1700 MHz to 5000 MHz frequency bands. The antenna is the ideal choice when multiple band widths are required in various regional and global applications. The desktop antenna is designed with a minimal detuning effect when placed on a ground plane.

FEATURES

- Covers 698 - 960 MHz and 1700 - 5000 MHz frequency bands
- Operates simultaneously in more than eleven frequency bands supporting LTE, cellular, Quadband GSM+UMTS / 3G, AWS, WLAN, WISP, WiMAX and Public Safety Radio.
- Coaxial cable pigtail with various connector choices
- Omnidirectional gain patterns
- Conformance to RoHS

MARKETS

- LTE
- GSM 850 / 900
- GSM 1800 / 1900
- UMTS / WCDMA (3G)
- 802.11 b/g/n WLAN application
- Bluetooth® devices
- WiMAX MMDS / 3.5 GHz
- Public Safety Radio

TYPICAL ELECTRICAL SPECIFICATIONS

PARAMETER	SPECIFICATION
Frequency	698 – 862 MHz 824 – 894 MHz 880 – 960 MHz 1710 – 1880 MHz 1850 – 1990 MHz 1920 – 2170 MHz 2300 – 2400 MHz 2400 – 2500 MHz 2500 – 2690 MHz 3400 – 3600 MHz 4940 – 4990 MHz
Gain	3.0 dBi (698 – 960 MHz) 4.9 dBi (1700 – 5000 MHz)
Average Efficiency	73% (698 – 960 MHz) 68% (1700 – 5000 MHz)
Polarization	Vertical, Omnidirectional Radiation Pattern
Nominal Impedance	50 Ohms
VSWR	< 2.5 : 1 (698 – 960 MHz) < 2 : 1 (1700 – 5000 MHz)
Size	175 x 34 mm

Note: There will be some variance of spec with different type of cable, different length of cable and connector. Contact Laird for detail specification.

Americas: +1.847 839.6907
IAS-AmericasEastSales@lairdtech.com


Europe: +44.1628.858941
IAS-EUSales@lairdtech.com

Asia: +86.21.5855.0827.127
IAS-AsiaSales@lairdtech.com


www.lairdtech.com

DBS6950 External Wireless Dipole Desktop LTE Antenna


TYPICAL RADIATION PATTERNS (AZIMUTH PLANE – THETA 90°)

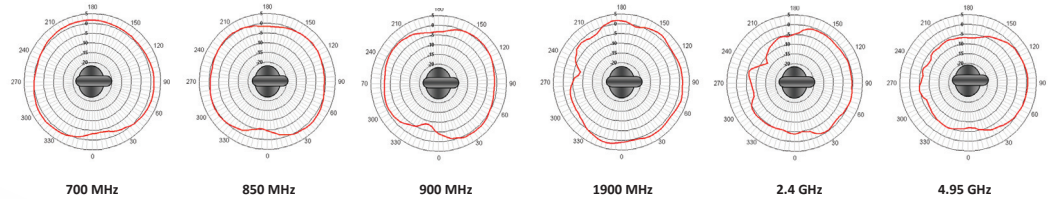

TYPICAL RADIATION PATTERNS (ELEVATION° PLANE – PHI 0°)

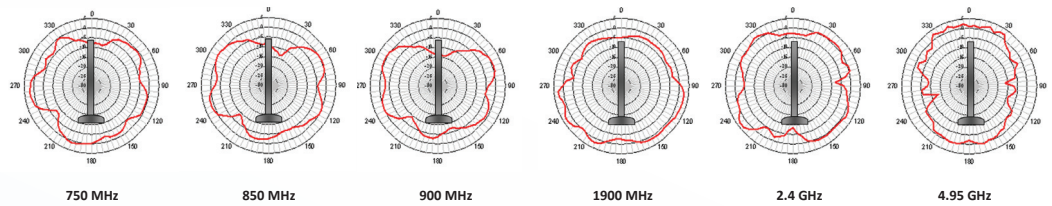

TYPICAL RADIATION PATTERNS (ELEVATION 90° PLANE – PHI 90°)

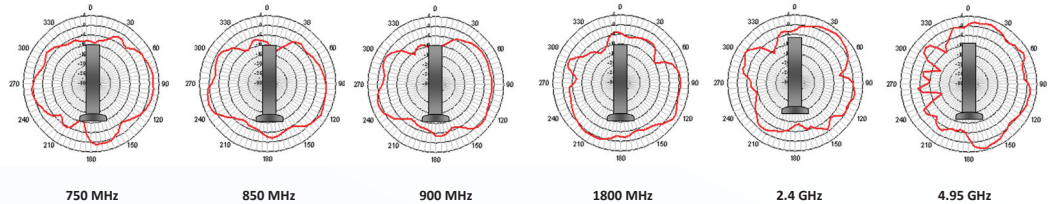

CABLES AND CONNECTORS

PART No.	CABLE	CONNECTOR
DBS6950D1-50MMCP	50cm, RG174	MMCX

Americas: +1.847 839.6907
IAS-AmericasEastSales@lairdtech.com
Europe: +44.1628.858941
IAS-EUSales@lairdtech.com
Asia: +86.21.5855.0827.127
IAS-AsiaSales@lairdtech.com
www.lairdtech.com

ANT-DS-DBS6950 0315

Any information furnished by Laird Inc. and its agents is believed to be accurate and reliable. All specifications are subject to change without notice. Responsibility for the use and application of Laird materials rests with the end user, since Laird and its agents cannot be aware of all potential uses. Laird makes no warranties as to the fitness, merchantability or suitability of any Laird materials or products for any specific or general uses. Laird shall not be liable for incidental or consequential damages of any kind. All Laird products are sold pursuant to the Laird Terms and Conditions of sale in effect from time to time, a copy of which will be furnished upon request. © Copyright 2015 Laird Inc. All Rights Reserved. Laird, Laird Technologies, the Laird Logo, and other marks are trade marks or registered trade marks of Laird Inc. or an affiliate company thereof. Other product or service names may be the property of third parties. Nothing herein provides a license under any Laird or any third party intellectual property rights.