

SL24513P12SMF

Omni-directional Ceiling Mount Antenna



TRI-MODE, DUAL-BAND 802.11B/A/G CEILING MOUNT AND OMNI-DIRECTIONAL PANEL ANTENNA

The Laird Technologies SL24513P12SMF tri-mode, dual-band omni-directional panel antenna provides 3 dBi gain coverage for ceiling mount applications. The diminutive antenna integrates mounting clips for installation into its design. The sleek, low-profile antenna provides high performance with minimal aesthetic impact.

The antenna incorporates a single RF port that supports access point radio devices utilizing any combination of 802.11b/a/g multimode sets as well as 802.11b, 802.11a or 802.11g single mode chip sets. Extremely symmetrical and uniform omni-directional coverage makes the antenna best suited to support high performance, high capacity data connectivity systems where the identification of coverage zones optimizes overall system performance characteristics.

A plenum-rated coax pigtail and SMA female connector are standard, but any popular 802.11 access point connector option is available upon request.

FEATURES

- High performance omni in small package
- Mounting hardware adjusts height from ceiling
- Coax pigtail length can be modified
- Additional mounting options available

MARKETS

- Offices
- Shopping malls
- Warehouses
- Business and healthcare complexes
- Transportation centers

global solutions: local support.™

Americas: +1.847.839.6907
IAS-AmericasEastSales@lairdtech.com

Europe: +1.32.80.7866.12
IAS-EUSales@lairdtech.com

Asia: +1.65.6.243.8022
IAS-AsiaSales@lairdtech.com


www.lairdtech.com

SL24513P12SMF

Omni-directional Ceiling Mount Antenna

PARAMETER	SPECIFICATION
Frequency Range (MHz)	2400-2500, 5150-5350
Gain (dBi)	3 (Peak)
E-Plane 3 dB Beamwidth	120° / 80°
H-Plane 3 dB Beamwidth	Omnidirectional
Polarization	Linear
Weight lbs (kg) (with 12" cable)	0.15 (68)
VSWR	2.0:1
Mount Style	Ceiling grid
Dimensions in. (cm)	2.2" x 2.2" x 7" (5.1 x 5.1 x 1.8)
Enclosure	ABS/PVC
Power (Watts)	10
RF Connector	SMA (f)
Pigtail	12"

* Pattern data represents a ceiling mounted antenna

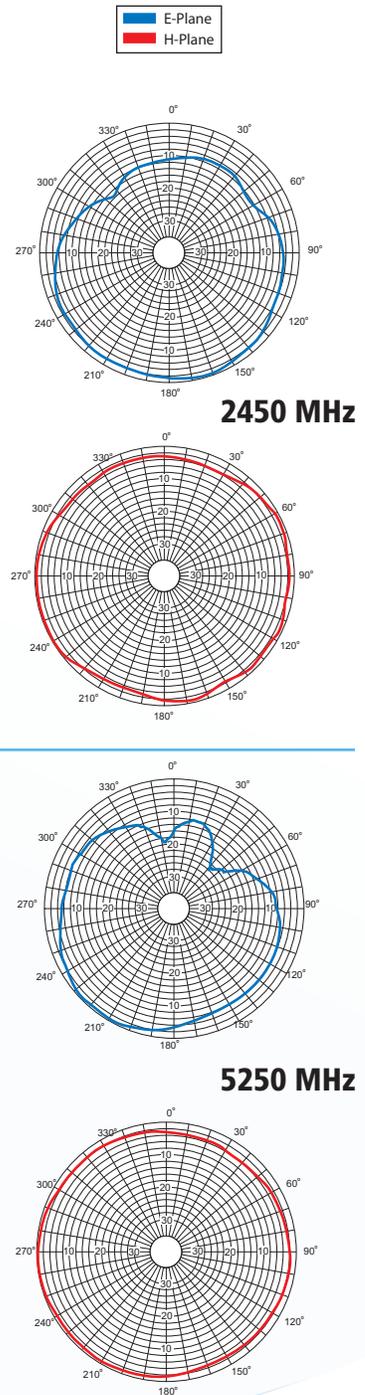

global solutions: local support™

Americas: +1.847.839.6907
IAS-AmericasEastSales@lairdtech.com

Europe: +1.32.80.7866.12
IAS-EUSales@lairdtech.com

Asia: +1.65.6.243.8022
IAS-AsiaSales@lairdtech.com

www.lairdtech.com

ANT-DS-SL24513P12SMF 0509

Any information furnished by Laird Technologies and its agents is believed to be accurate and reliable. Responsibility for the use and application of Laird Technologies materials rests with the end user since Laird Technologies and its agents cannot be aware of all potential uses. Laird Technologies makes no warranties as to the fitness, merchantability, or suitability of any Laird Technologies materials or products for any specific or general uses. Laird Technologies shall not be liable for incidental or consequential damages of any kind. All Laird Technologies products are sold pursuant to the Laird Technologies terms and conditions of sale in effect from time to time, a copy of which will be furnished upon request. All Laird Technologies products are sold pursuant to the Laird Technologies terms and conditions of sale in effect from time to time, a copy of which will be furnished upon request.

© 2009 All Rights Reserved. Laird Technologies is a registered trademark of Laird Technologies, Inc.