

# eTEG Series PG37,72,F2,0203,GG

## Thin Film Energy Harvester

The eTEG Series is a micro thermoelectric power generator that harvests waste heat and converts it to usable output DC power. Due to its size, output power generation and heat conversion to power ratio this device is suitable for use in applications to power wireless sensors and wireless sensor networks.

One eTEG PG37 can produce 130 milliWatts of output power and 2.5 volts in an open circuit at a temperature differential of 100°C all within a 10.3 mm<sup>2</sup> footprint. This unit is assembled with thin film semiconductor material, thermally conductive aluminum nitride ceramics and gold plated wire bondable pads. The eTEG Series is designed for low power output applications with tight geometric space constraints. Custom designs are available to accommodate metallization, pretin solder and ceramic patterns, however MOQ applies.

### FEATURES

- Micro Footprint
- High Output Power Density
- High Waste Heat Conversion Ratio
- Reliable Solid State Operation
- RoHS Compliant

### APPLICATIONS

- Wireless Sensors
- LED Lighting
- Battery Charging

| PERFORMANCE SPECIFICATIONS  | $\Delta T$ |      |       |
|-----------------------------|------------|------|-------|
|                             | 10°C       | 50°C | 100°C |
| Power Output (mW)           | 1.5        | 36   | 130   |
| Voltage Output (V)          | 0.13       | 0.6  | 1.25  |
| Current Output (mA)         | 12         | 60   | 105   |
| Voltage Open Circuit (V)    | 0.26       | 1.2  | 2.5   |
| Current, Short Circuit (mA) | 24         | 115  | 210   |

| THERMAL PARAMETERS  |           |
|---------------------|-----------|
| Thermal Resistance  | 13.1 K/W  |
| Thermal Conductance | 0.076 W/K |

| PACKAGE ASSEMBLY CONDITIONS |        |
|-----------------------------|--------|
| Max Time Exposure > 290°C   | 60 sec |
| Peak Assembly Temperature   | 325°C  |

| TEMPERATURE CONDITIONS    |       |
|---------------------------|-------|
| Max Operating Temperature | 150°C |

Performance maximized with matched electrical load

### global solutions: local support™

Americas: +1 888.246.9050



Europe: +46.31.420530

Asia: +86.755.2714.1166



clv.customerpos@lairdtech.com

www.lairdtech.com

### PERFORMANCE CURVES

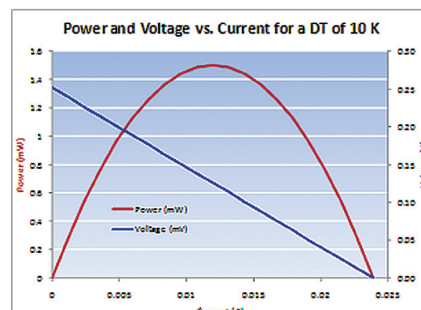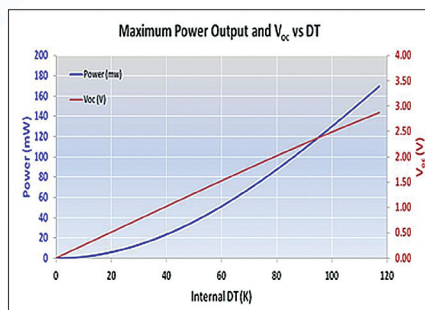

### ISOMETRIC DRAWING

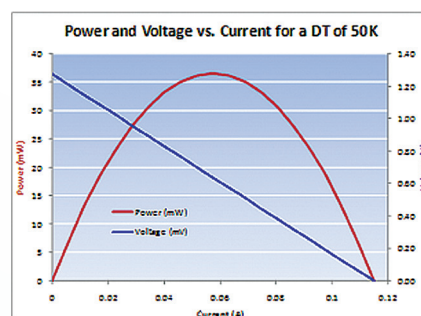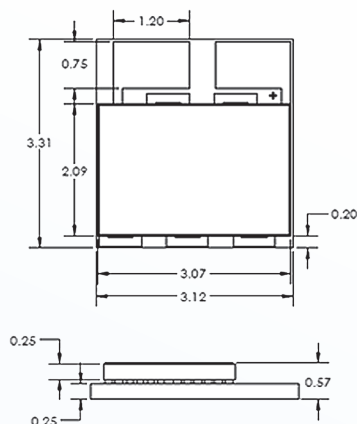

### Standard

Au metallization on exterior ceramic substrate surfaces

Au wire bondable pads on hot side ceramic for lead attachment

### Optional

Bare solder wires, 2.0 inches in length

### DEFINITIONS

**$P_{max}$**  The maximum amount of power created from the thermoelectric generator's Seebeck effect. This point occurs when the load resistance matches the device resistance resulting in an output voltage of  $\frac{1}{2} V_{oc}$ , where  $V_{oc}$  is the open circuit voltage.

**$\Delta T$**  Delta T is the temperature difference across the thermoelectric generator.