

BG14B

5-4000 MHz Cascadable InGaP HBT Gain Block



Device Features

- OIP3 = 35 dBm @ 1900 MHz
- Gain = 16 dB @ 1900 MHz
- Output P1 dB = 19.5 dBm @ 1900 MHz
- 50 Ω Cascadable
- Patented temperature compensation
- Lead-free/RoHS-compliant SOT-89 SMT package



Product Description

BeRex's BG14B is a high performance InGaP/GaAs HBT MMIC amplifier, internally matched to 50 Ohms and uses a patented **temperature compensation** circuit to provide stable current over the operating temperature range without the need for external components. The BG14B is designed for high linearity gain block applications that require excellent gain flatness. It is packaged in a RoHS-compliant with SOT-89 surface mount package.

Typical Performance¹

	Frequency						Unit
	70	500	900	1900	2450	3500	MHz
Gain	17.3	17.3	17.0	16.0	15.2	14.3	dB
S11	-20.0	-18.5	-17.5	-27.5	-19.0	-24.4	dB
S22	-13.0	-14.0	-15.0	-10.5	-10.0	-11.6	dB
OIP3 ²	37.0	37.5	36.5	35	33.5	29.0	dBm
P1dB	19.5	19.5	19.5	19.5	19.5	17.6	dBm
N. F	5.0	5.0	5.0	5.2	5.5	7.0	dB


¹ Device performance _ measured on a BeRex evaluation board at 25°C, 50 Ω system.

² OIP3 _ measured with two tones at an output of 9 dBm per tone separated by 1 MHz.

Applications

- Base station Infrastructure/RFID
- Commercial/Industrial/Military wireless system

Applications Circuit

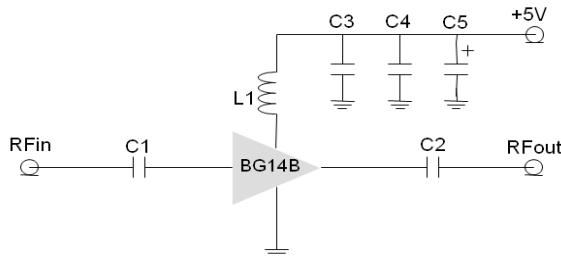

- *C1, C2, C3 = 100 pF \pm 5%; C4 = 1000 pF \pm 5%; C5 = 10uF; L1 = 39nH
- *40nH or higher value L1 improves RF performance at under 500MHz.
- *Optimum value of L1 may vary with board design.
- *C1,C2=8200pF, L1=1200nH for 70MHz application,
- Vcc=5.2V if 1200nH is used to compensate IR drop across L1.
- *L1:6.8nH, C1&C2:10pF for 3.5GHz Application.

	Min.	Typical	Max.	Unit
Bandwidth	5		4000	MHz
I _c @ (V _c = 5V)	70	75	85	mA
V _c		5.0		V
dG/dT		-0.004		dB/°C
R _{TH}		85		°C/W

Absolute Maximum Ratings

Parameter	Rating	Unit
Operating Case Temperature	-40 to +85	°C
Storage Temperature	-55 to +155	°C
Junction Temperature	+220	°C
Operating Voltage	+6.5	V
Supply Current	150	mA
Input RF Power	23	dBm


Operation of this device above any of these parameters may result in permanent damage.

BG14B


5-4000 MHz Cascadable InGaP HBT Gain Block



V-I Characteristics

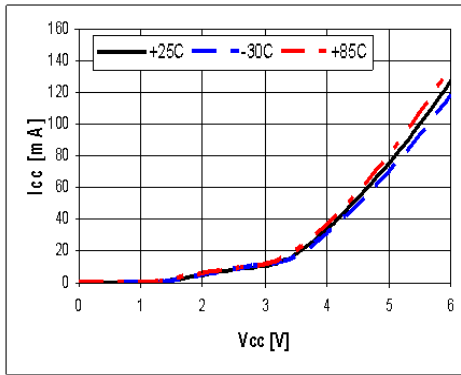

BeRex SOT89 Evaluation Board

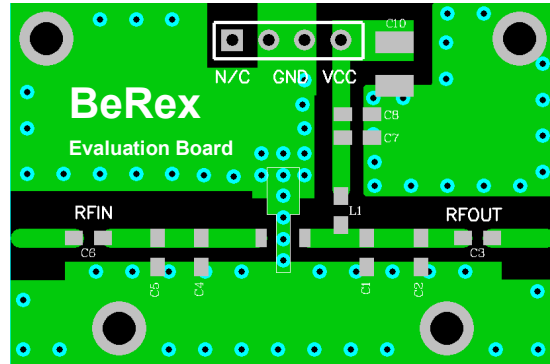


*Dielectric constant _ 4.2 *RF pattern width 52mil *31mil thick FR4 PCB

Typical Device Data


S-parameters (Vc=5V, Ic=75mA, T=25°C)

CH1 LOG 10 dB/ REF 0 dB
S11 1:-20.511 dB 500.000 000 MHz

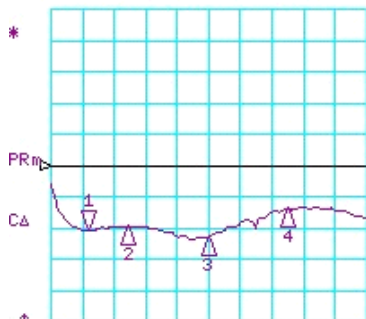


START 50.000 MHz STOP 4000.000 MHz

CH3 LOG 10 dB/ REF 0 dB
S13 1:-23.202 dB 500.000 000 MHz

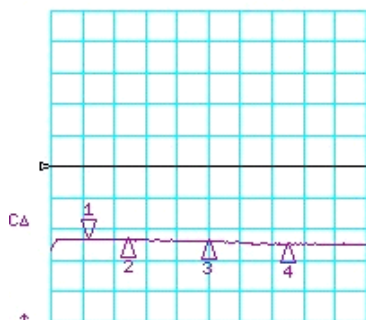


START 50.000 MHz STOP 4000.000 MHz

CH2 LOG 10 dB/ REF 0 dB
S31 1: 17.257 dB 500.000 000 MHz

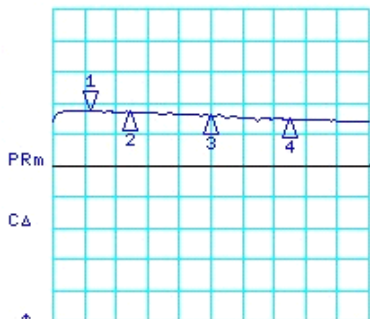

START 50.000 MHz STOP 4000.000 MHz

CH4 LOG 10 dB/ REF 0 dB
S33 1:-12.253 dB 500.000 000 MHz

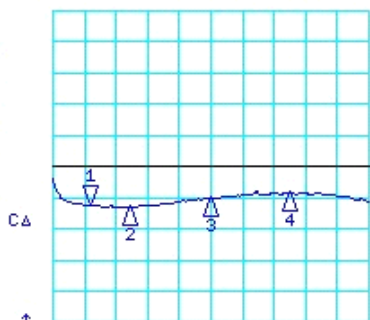

START 50.000 MHz STOP 4000.000 MHz

BG14B



5-4000 MHz Cascadable InGaP HBT Gain Block

S-Parameter

(Vdevice = 5.0V, Icc = 75mA, T = 25 °C, calibrated to device leads)

Freq [MHz]	S11 [Mag]	S11 [Ang]	S21 [Mag]	S21 [Ang]	S12 [Mag]	S12 [Ang]	S22 [Mag]	S22 [Ang]
100	0.111	169.412	7.453	173.539	0.070	-3.904	0.240	-7.438
500	0.121	131.454	7.321	148.756	0.069	-17.850	0.225	-36.290
1000	0.132	92.814	7.113	117.826	0.068	-36.333	0.208	-76.064
1500	0.105	44.732	6.803	87.310	0.066	-52.837	0.227	-113.848
2000	0.075	-27.875	6.494	57.759	0.063	-69.325	0.279	-143.207
2500	0.126	-101.268	6.088	29.213	0.061	-85.687	0.330	-164.117
3000	0.155	-124.373	5.832	1.324	0.058	-101.832	0.320	174.189
3500	0.154	-135.099	5.668	-26.222	0.058	-117.014	0.255	151.417
4000	0.158	-118.070	5.266	-55.209	0.059	-136.640	0.128	107.020

Typical Performance (Vd = 5V, Ic = 75mA, T = 25°C)

Freq	MHz	70	500	900	1900	2140	2450	3500
S21	dB	17.3	17.3	17.0	16.0	15.7	15.2	14.3
S11	dB	-20.0	-18.5	-17.5	-27.5	-23.0	-19.0	-24.4
S22	dB	-13.0	-14.0	-15.0	-10.5	-11.5	-10.0	-11.6
P1	dBm	19.5	19.5	19.5	19.5	19.5	19.5	17.6
OIP3	dBm	37.0	37.5	36.5	35.0	34.5	33.5	29.0
NF	dB	5.0	5.0	5.0	5.2	5.3	5.5	7.0

Typical Performance (Vd = 4.7V, Ic = 67mA, T = 25°C)

Freq	MHz	70	500	900	1900	2140	2450
S21	dB	16.8	17.1	16.9	15.9	15.7	15.1
S11	dB	-10.3	-24.8	-24.4	-25.4	-24.0	-25.4
S22	dB	-10.6	-11.0	-10.6	-9.7	-9.2	-9.8
P1	dBm	17.9	17.9	18.0	18.2	17.6	17.8
OIP3	dBm	35.5	33.5	33.5	33.0	32.5	32
NF	dB	5.0	5.0	5.0	5.2	5.3	5.5

BG14B



5-4000 MHz Cascadable InGaP HBT Gain Block

Typical Performance (Vd = 4.5V, Ic = 58mA, T = 25°C)

Freq	MHz	70	500	900	1900	2140	2450
S21	dB	16.6	17.0	16.8	15.8	15.8	15.1
S11	dB	-11.0	-26.1	-25.4	-25.3	-23.6	-25.1
S22	dB	-9.2	-10.3	-10.4	-9.5	-9.1	-9.7
P1	dBm	17.2	17.2	16.6	16.7	16.7	16.8
OIP3	dBm	33.0	33.0	32.0	31.5	31.5	30.5
NF	dB	5.0	5.0	5.0	5.2	5.3	5.5

Typical Performance (Vd = 4V, Ic = 37mA, T = 25°C)


Freq	MHz	70	500	900	1900	2140	2450
S21	dB	15.9	15.9	16.0	15.1	14.8	14.4
S11	dB	-11.7	-31.4	-29.5	-23.4	-21.8	-23.1
S22	dB	-8.6	-9.5	-9.6	-8.8	-8.5	-9.1
P1	dBm	12.2	12.6	12.6	12.9	12.3	11.8
OIP3	dBm	25.5	24.0	24.5	25.0	24.5	25.0
NF	dB	5.0	5.0	5.0	5.2	5.3	5.5

BG14B




5-4000 MHz Cascadable InGaP HBT Gain Block

WCDMA 4FA 2140 -60dBc

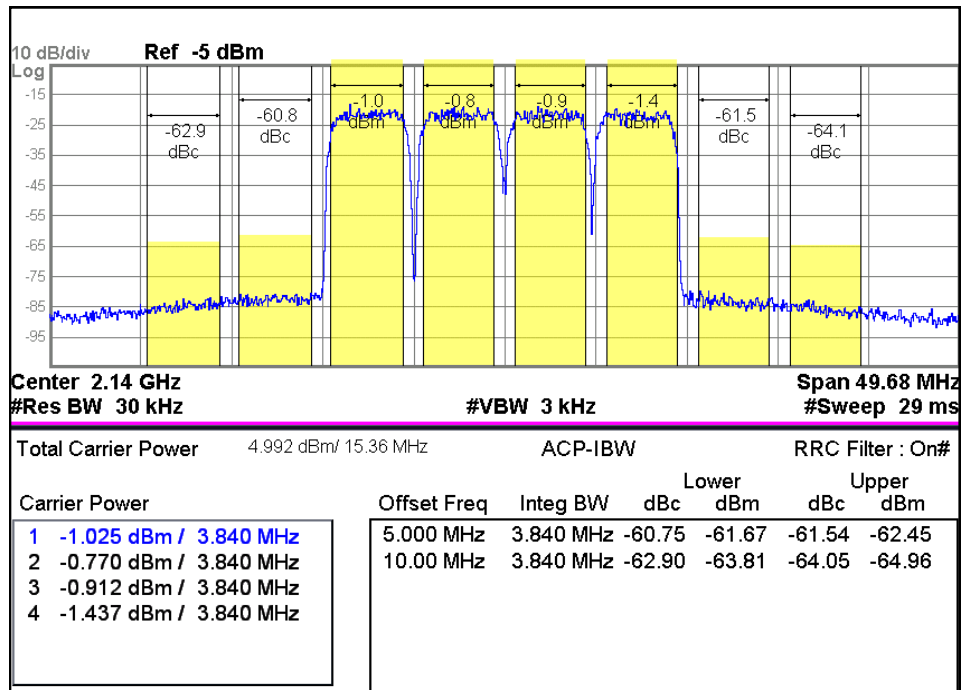

WCDMA 6FA 2140 -60dBc

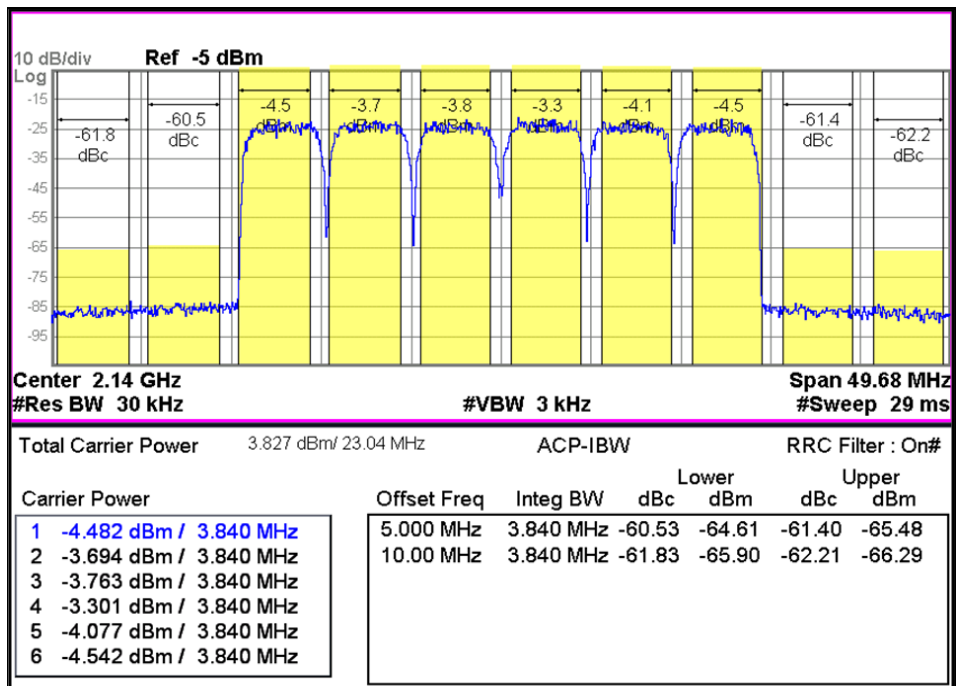


BG14B

5-4000 MHz Cascadable InGaP HBT Gain Block




ACLR

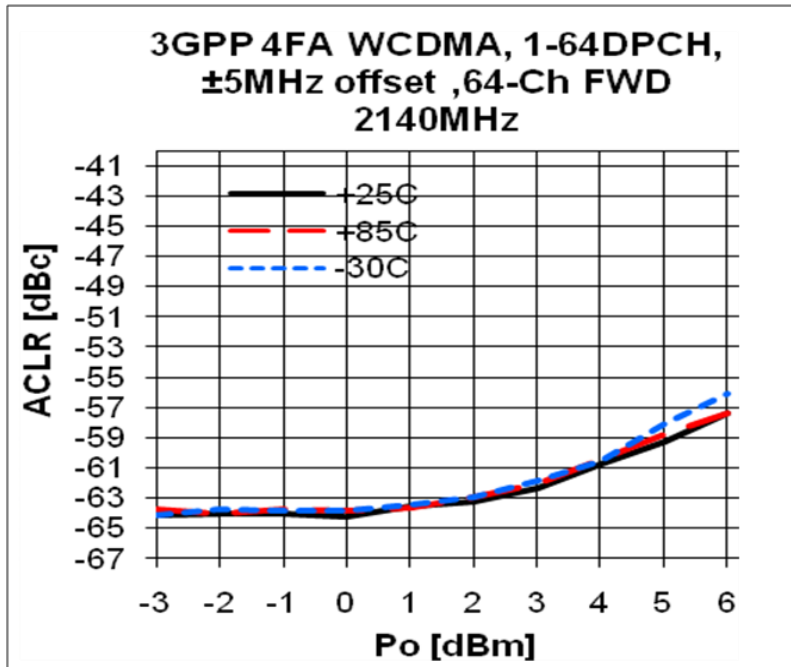


Device Performance

Pin-Pout-Gain

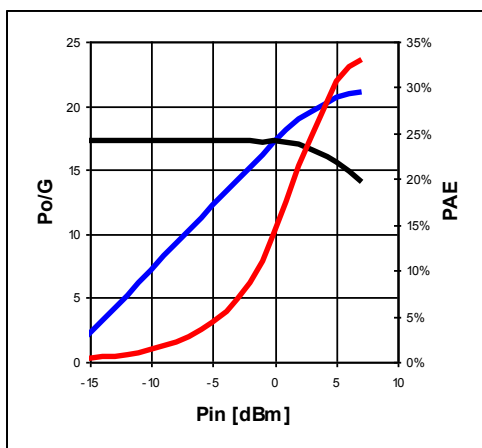

900MHz, 5V/75mA

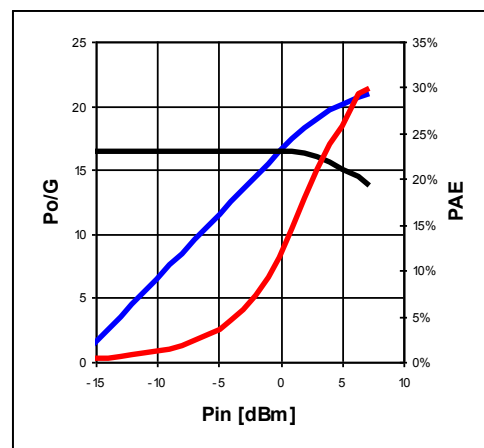







1900 MHz, 5V/75mA

BG14B

5-4000 MHz Cascadable InGaP HBT Gain Block



OIP3

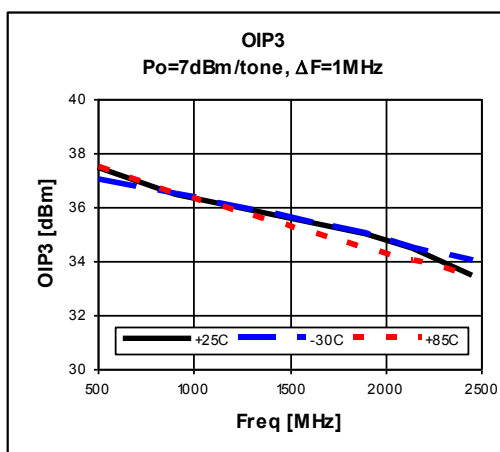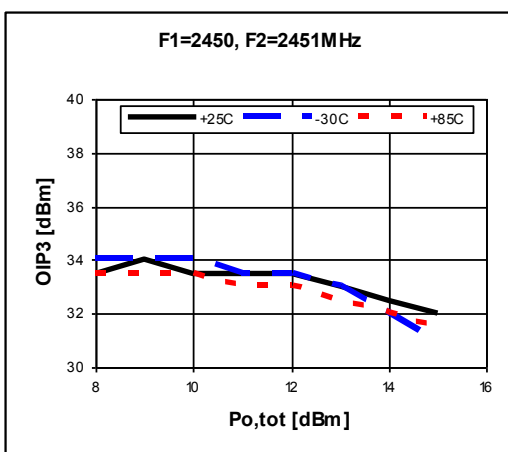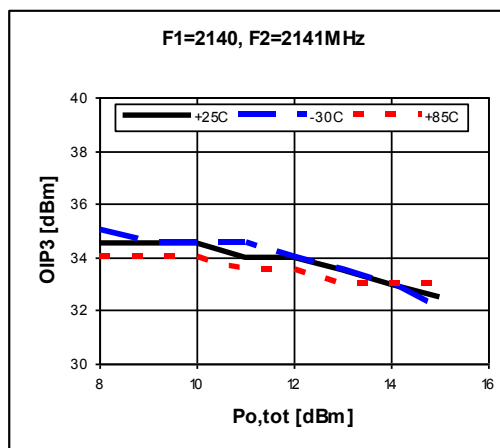
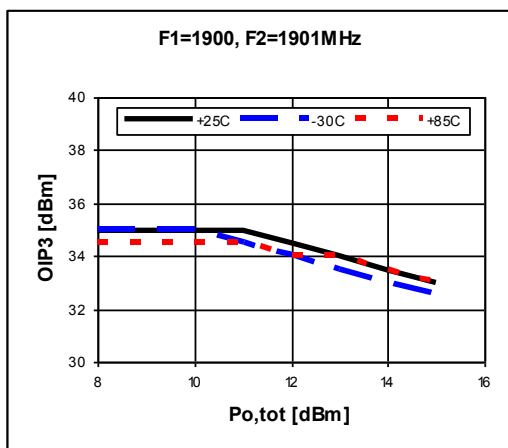
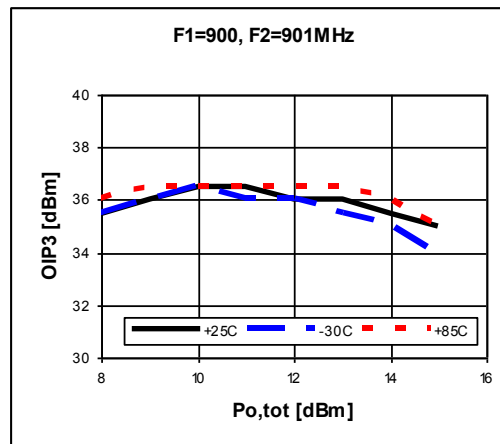
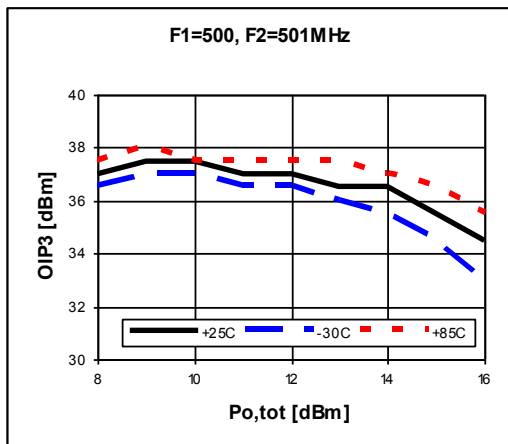


BG14B


5-4000 MHz Cascadable InGaP HBT Gain Block



ACPR

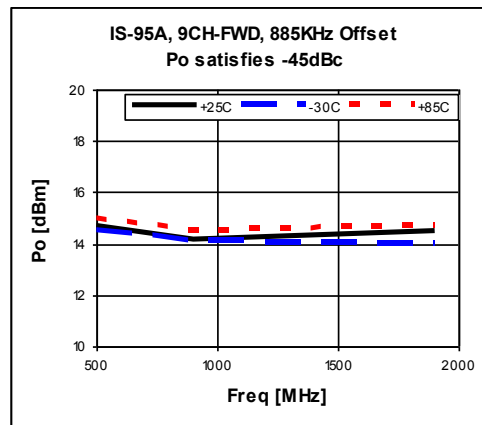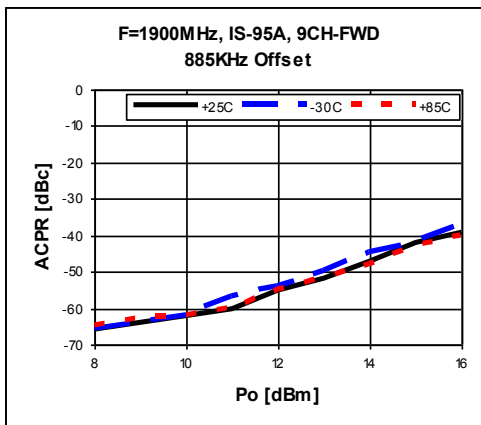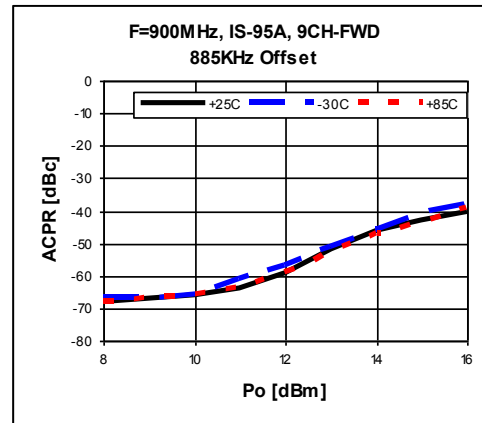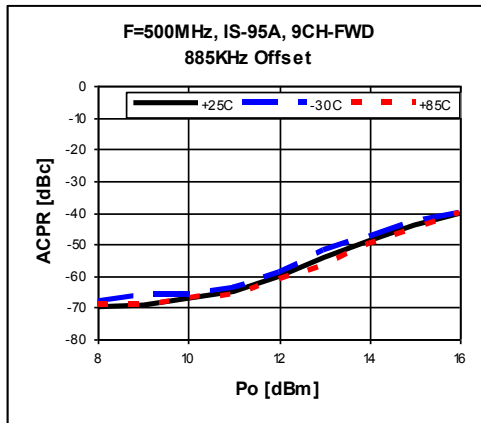

Gain Flatness

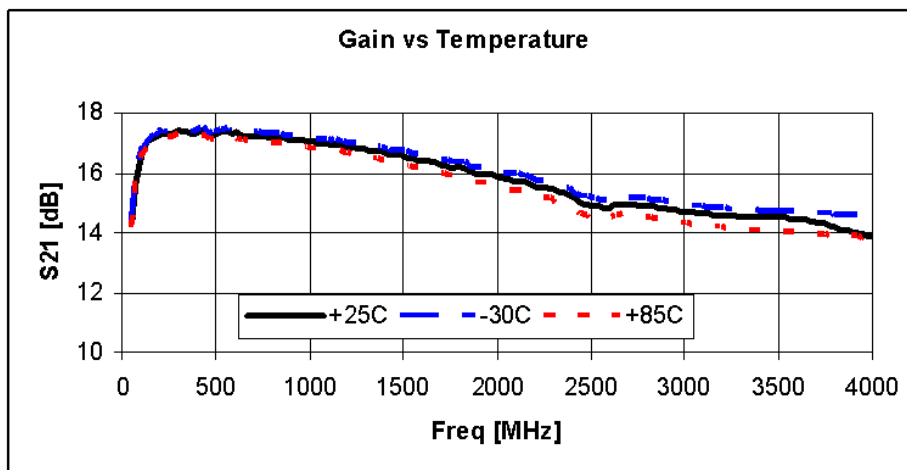


BG14B

5-4000 MHz Cascadable InGaP HBT Gain Block



Package Outline Dimension

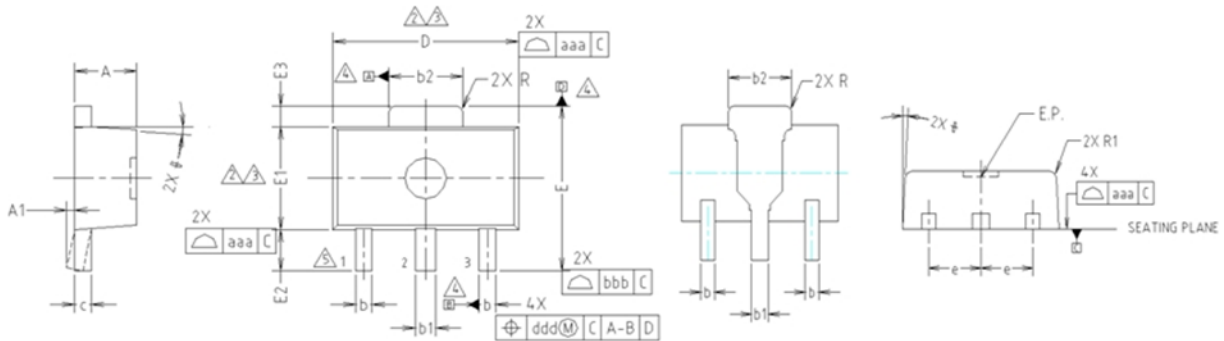


- NOTE:**
 1. DIMENSIONS IN MILLIMETERS.
- ⚠ DIMENSION D DOES NOT INCLUDE MOLD FLASH, PROTRUSIONS OR GATE BURRS. MOLD FLASH, PROTRUSIONS OR GATE BURRS SHALL NOT EXCEED 0.5mm PER END. DIMENSION E1 DOES NOT INCLUDE INTERLEAD FLASH OR PROTRUSION. INTERLEAD FLASH OR PROTRUSION SHALL NOT EXCEED 0.5mm PER SIDE.
 - ⚠ DIMENSIONS D AND E1 ARE DETERMINED AT THE OUTMOST EXTREMES OF THE PLASTIC BODY EXCLUSIVE OF MOLD FLASH, TIE BAR BURRS, GATE BURRS AND INTERLEAD FLASH, BUT INCLUDING ANY MISMATCH BETWEEN THE TOP AND BOTTOM OF THE PLASTIC BODY.
 - ⚠ DATUMS A, B AND D TO BE DETERMINED 0.18mm FROM THE LEAD TIP.
 - ⚠ TERMINAL NUMBERS ARE SHOWN FOR REFERENCE ONLY.

SYMBOL	MILLIMETERS			NOTE
	MINIMUM	NOMINAL	MAXIMUM	
A	1.40	1.50	1.60	
A1	0.00	—	0.10	
b	0.38	0.42	0.48	
b1	0.48	0.52	0.58	
b2	1.79	1.82	1.87	
c	0.40	0.42	0.46	
D	4.40	4.50	4.70	2,3
E	3.70	4.00	4.30	
E1	2.40	2.50	2.70	2,3
E2	0.80	1.00	1.20	
E3	0.40	0.50	0.60	
e	1.50 TYP.			
φ	4° TYP.			
R	0.15 TYP.			
R1	—	—	0.20	
SYMBOL	TOLERANCES OF FORM AND POSITION		NOTE	
aaa	0.15			
bbb	0.20			
ccc	0.10			
ddd	0.10			

Suggested PCB Land Pattern and PAD Layout


PCB Land Pattern

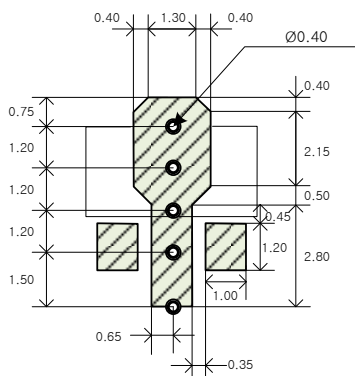

Note : All dimension _ millimeters

PCB lay out _ on BeRex website

PCB Mounting

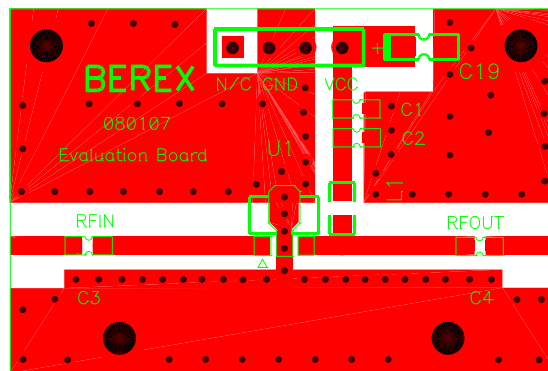


BG14B

5-4000 MHz Cascadable InGaP HBT Gain Block



Package Marking




Pin 1

YY = Year, WW = Working Week,
XX = Wafer No.

Tape & Reel

SOT89



Packaging information:

Tape Width (mm): 12
Reel Size (inches): 7
Device Cavity Pitch (mm): 8
Devices Per Reel: 1000

Lead plating finish

100% Tin Matte finish

(All BeRex products undergoes a 1 hour, 150 degree C, Anneal bake to eliminate thin whisker growth concerns.)

MSL / ESD Rating

ESD Rating:	Class 1C
Value:	Passes <2000V
Test:	Human Body Model (HBM)
Standard:	JEDEC Standard JESD22-A114B
MSL Rating:	Level 1 at +265°C convection reflow
Standard:	JEDEC Standard J-STD-020

NATO CAGE code:

2	N	9	6	F
---	---	---	---	---