

PRO-FACE OPERATOR INTERFACES

product data sheet



AGP3300-L1-D24-FN1M




AGP3300L FN1M Integrated HMI Controller

5.7" Integrated Control Operator Interface with Dual Channel Flex Network Port

- Crisp, Clear, Bright 320x240 Resolution Monochrome Display
- 64-bit RISC 133Mhz CPU for Ultra-Fast Screen Refresh and Data Sampling
- No Grid Analog Touch Panel for Improved Visibility and Precise Part Placement
- Supports Up to Two Protocol Drivers Simultaneously
- High Speed Application Transfer, 10 Times Faster than Conventional Operator Interfaces
- 10/100 Base-T Ethernet, USB, Serial (MPI) and CompactFlash™ Communication Interfaces
- High-Definition Part Images and Multi-Language Support

PRODUCT OVERVIEW

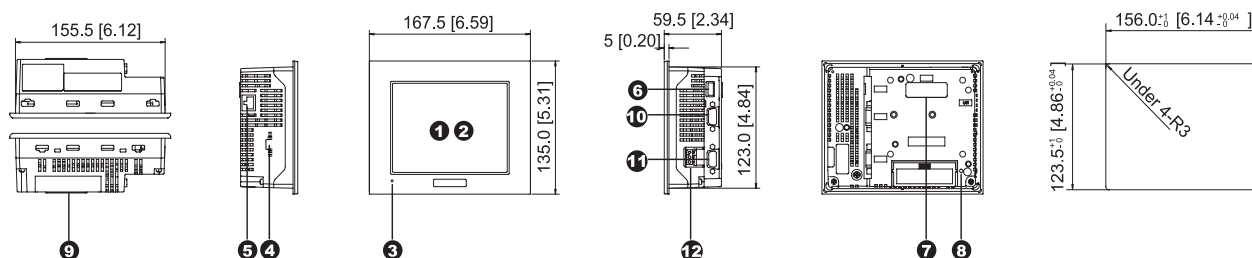


AGP3300T (AC type) unit shown.

- | | | |
|---|--|---|
| <p>1 Display</p> <p>2 Touch Panel</p> <p>3 Status LED</p> <p>4 FLEX NETWORK Interface
2 ch. Flex Network interface for use with FN-xxx distributed I/O modules.</p> <p>5 10/100 Base-T Ethernet Interface (LAN) (RJ45)</p> | <p>6 USB 1.1 Type A Interface (Host)
One Port for download, bar-code, printer or other USB device</p> <p>7 Optional Communication Module Interface 2</p> <p>8 CF Card Access LED</p> <p>9 CompactFlash™ Card Access Cover
(CF cards up to 512MB available)</p> | <p>10 Serial Interface (COM1)
RS-232C/RS-422 serial interface. D-sub 9-pin plug type connector. Communication method is switched via software.</p> <p>11 Serial Interface (COM2)
RS-422/RS-485 MPI (187kbps) serial interface. D-sub 9-pin socket type connector.</p> <p>12 Power Plug Connector</p> |
|---|--|---|

COMMUNICATION CAPABILITY

Simultaneous Multi-Protocol Support
Up to four different protocols can be active at one time.

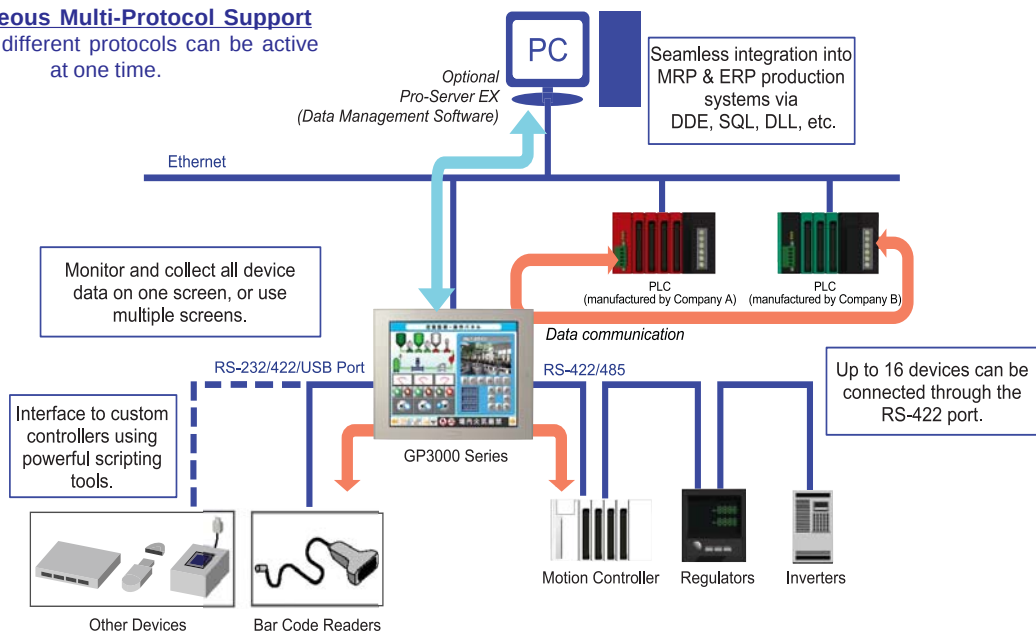

Pro-face
XYCOM

AGP3300L FN1M CONTINUED

INTEGRATED MONITOR CONTROL

ONLINE LOGIC PROGRAM MONITORING FEATURE




Detect Problems Faster

- View logic Programming on HMI while running.
"No need for a laptop!"
- Verify current values of all variables live
- Quickly identify sequential logic faults
- Helps optimize Programming & Processes
- View logic in English or Japanese

POWERFUL LOGIC PROGRAMMING

With GP-Pro EX, you can develop logic programs as well as screen creation. You can also import existing logic programs created with the GP-PRO/PBIII C-Package.

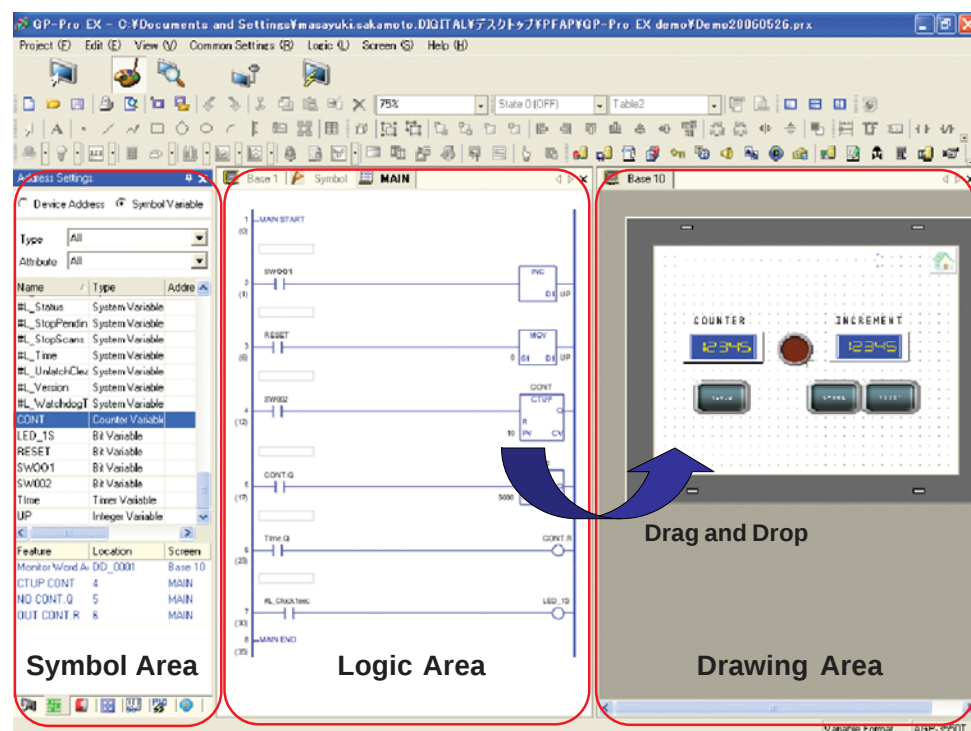

Time Saving Steps

Drag and Drop

Drag contact or coil to quickly create a graphical switch or lamp.

Re-usable sub-routines

Reduce steps for product programming development and maintenance using sub-routines.


Screen Editor
GP-Pro EX

DISTRIBUTED I/O MODULES

Features include: timers, counters, logical operations, mathematical, bit operation, etc. Mix and match any combination of analog and digital I/O modules.

63 Stations Max

- 256 Input Points Max
- 256 Output Points Max
- 64 Integer Inputs Max
- 64 Integer Outputs Max

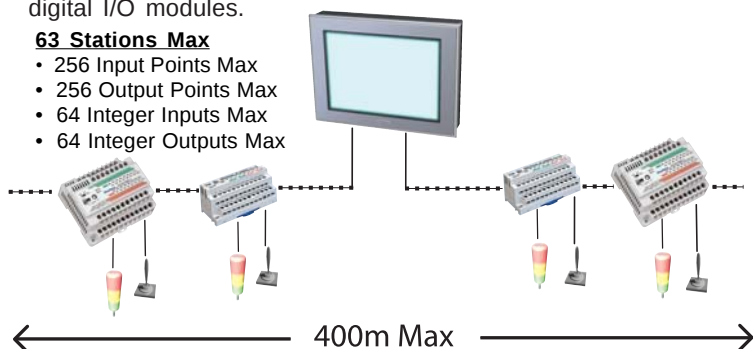

FLEX NETWORK MODULES

Monitor & Control

- For distributed I/O applications.
- Supports the Flex Network Analog and Discrete I/O Modules.



AGP3300L FN1M SPECIFICATIONS

FUNCTIONAL SPECIFICATIONS

Model	AGP3300-L1-D24-FN1M	
Display	Type	Monochrome LCD
	Colors	Black and White (16 shades)
	Backlight	CCFL Service life: 58,000 hrs. or more at 25°C (77°F) and 24 hrs. operation
	Resolution	320 x 240 pixels
	Brightness & Contrast Controls	8 levels of adjustment available via touch panel
Memory	Touch Panel	Resistive film analog 1024 x 1024 resolution
	Application	6 MB FEPRM
Interfaces	Data Backup	320KB SRAM
	Serial (COM 1) Interface	RS-232C/422/485 configurable, 9 pin D-sub plug, Data Transmission Speed: 2400 to 115.2 kbps
	Serial (COM 2) Interface	RS-422/485, 9 pin D-sub socket, Data Transmission Speed: 2400 to 115.2 kbps (MPI Direct 187.5 kbps)
	Ethernet Interface	Ethernet IEEE802.3, 10BASE-T/100BASE-TX, modular jack connector (RJ-45)
	USB Interface	1 Port USB1.1 Host I/F, USB TYPE-A connector
	Flex Network Interface	Connect to Flex Network distributed I/O modules: 2 channel, 200m per channel. Speed: 6Mbps, 12Mbps. Bit variable Input/Output: 512pts max. Integer Variable Input/Output: 128 pts max.
	CF Card Interface	1 slot CompactFlash™, TYPE II

GENERAL SPECIFICATIONS

Electrical	Rated Voltage	24V DC
	Rated Voltage Range	19.2V DC to 28.8V DC
	Power Consumption	26W or less
Environmental	Ambient Operating Temp.	0°C (32°F) to 50°C (122°F)
	Storage Temperature	-20°C (-4°F) to 60°C (140°F)
	Storage Humidity	10%RH to 90%RH (non-condensing, wet bulb temperature: 39°C (102°F) or less)
	Altitude Operation	800hPa to 1114hPa (2000 meters or lower)
	Vibration & Shock Resistance	IEC61131-2 compliant. 5Hz to 9Hz single amplitude 3.5mm, 9Hz to 150Hz fixed acceleration 9.8m/s ² , X,Y, Z directions for 10 times (80min.)
Structural	Ratings	Equivalent to IP65f, Nema #250 Type 4x/13 (Equivalent to NEMA 12 with the addition of "Oil or Coolant Spraying and Splashing")
	Certifications	CE, CSA, UL listed CI 1 Div 2
	External Dimensions	W167.4mm[6.59in.] x H135mm [5.31in.] x D59.5mm [2.34in.]
	Weight	1.0kg (2.2lb) or less

CUT-OUT COMPATIBILITY

16 Years of Cut-Out Compatibility



Old model

Panel cutout dimensions

Size (mm)	156x123.5 mm
Series	
GP77R Series	GP377R Series
GP2000 Series	GP2300/ GP2301 Series
GP3000 Series	GP-3300 Series

Investment Protection



AGP3000 model "Drop-in"

SOFTWARE COMPATIBILITY



POWERED BY:

Screen Editor
GP-Pro EX

HMI Development Software

ORDERING INFORMATION

ORDER NUMBER

AGP3300-L1-D24-FN1M

DESCRIPTION

5.7" Monochrome, 2 Serial, 1 USB, Ethernet, Flex Network, 24VDC

OPTIONAL ACCESSORIES

HMI-CAB-ETH	Ethernet Crossover Cable: HMI to PLC Ethernet port or to program HMI
CA3-USBCB-01	USB download cable, PC USB port to AGP USB port
CA3-DFS6-01	Overlay Screen protection sheet (5 sheets/pack)
PLC Cables & Accessories See AGP3000 Connectivity Document	

Xycom Automation
Ph: 734-429-4971
Fax: 734-429-1010
<http://www.xycom.com>

Customer Support Hotline:
734-944-0482



© 2006 Xycom Automation, LLC. Specifications may change without notice.

Xycom Automation is a trademark of Xycom Automation. Other brand or product names are the property of their respective owners.