

# The **DEETER** Group®

## RPS-409A-IS2

### Self-Contained Ultrasonic Sensor

Intrinsically Safe ultrasonic sensor with ANZEx, ATEX, cUL, & IECEx approvals for use in Hazardous (Classified) Locations



#### Features

- Intrinsically Safe
- Analog Voltage Output
- Sync/Tx Input Line
- Various Sensing Ranges
- Wide Temperature Range
- Temperature Compensation
- LED Indicator
- PPS Enclosure

Deeter House  
Valley Road  
Hughenden Valley  
Bucks HP14 4LW

Tel: +44 (0)1494 566 046  
Fax: +44 (0)1494 563 961  
Email: sales@deeter.co.uk




www.deeter.co.uk

# The DEETER Group®

## RPS-409A-IS2 Self-Contained Ultrasonic Sensor

The RPS-409A-IS2 is an intrinsically safe analog ultrasonic sensor available in a variety of ranges. The RPS-409A-IS2 sensors can be used in hazardous gas or dust environments classified as Zone 0, 1, 2, 20, 21, or 22 for ATEX/IECEX, and Class I, II, or III for UL/cUL when used with approved intrinsic safety barrier(s). See the RPS-409A-IS2 User Manual and Control Drawing No. Ex05021114 for further information on installation in hazardous locations.

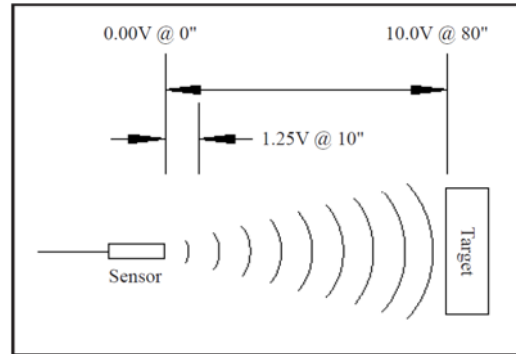

The sensor is self-contained in a 30mm barrel style enclosure, and is powered by 16 – 30 V dc with reverse polarity protection.

The RPS-409A-IS2 has a short circuit protected 0 - 10 V dc analog output. The analog voltage is a fixed volts per inch based on the maximum range of the unit. For example when using the RPS-409A-80-IS2, the output is a linear 0.125 V per inch. A target placed 10 inches from the sensor will result in an output of 1.25 V or a target placed at 80 inches from the sensor will result in an output of 10 V.

The RPS-409A-IS2 has built-in temperature compensation to provide accurate readings throughout the entire operating temperature range.

An LED indicator is provided. The LED is green with no target detected and changes to red when a target is detected. The sensor is completely sealed and connection must be made with a cable having a rating of IP67 or greater.

In addition to the analog output line the sensor also has a Sync/Tx line. This line can be used for connecting multiple sensors together (Sync) to prevent cross talk, or to control when the sensor transmits (Tx).

The RPS-409A-IS2 is designed to take advantage of today's PLC and computer analog input cards. The numerical values that are programmed into the PLC or computer will determine the zero and span of the sensor.

Deeter House  
Valley Road  
Hughenden Valley  
Bucks HP14 4LW

Tel: +44 (0)1494 566 046  
Fax: +44 (0)1494 563 961  
Email: sales@deeter.co.uk



www.deeter.co.uk

# The DEETER Group®

## RPS-409A-IS2 Self-Contained Ultrasonic Sensor

### Specifications:

<b>Model Number:</b>	<b>Sensor Range:</b>	<b>Transducer Frequency:</b>	<b>Response Time:</b>	<b>Volts Per Inch:</b>
RPS-409A-40-IS2	4-40"	175kHz	85ms	0.250
RPS-409A-80-IS2	6-80"	135kHz	85ms	0.125
RPS-409A-144-IS2	10-144"	70kHz	175ms	0.069
RPS-409A-216-IS2	12-216"	70kHz	175ms	0.046

Entity Parameters	See Control Drawing No. Ex05021114
Power Input	16 - 30VDC Reverse Polarity Protected (A minimum of 24VDC must be applied to the power barrier)
Input Current	24mA maximum with 24VDC applied to the power barrier
Ambient Temperature	-40 - 60°C or -40 - 140°F
Humidity	0 - 95% Non-Condensing
Enclosure Material	Polyphenylene Sulfide (PPS) Enclosure with PPS and PTFE sensing face
Output	Analog Voltage Output 0 - 10V (Load 100k Ohms to infinity) Short Circuit Protected
Approvals	Australia and New Zealand - ANZEx 13.3010X Ex ia I Ma, Ex ia IIC T4 Ga, Ex ia IIIC T101°C Da  Canada and USA - UL/cUL File # E226209 CL I, GPS A,B,C,D; CL II, GPS E,F,G; and CL III  Europe (CENELEC) - DEMKO 12 ATEX 1103028X Ex I M1 / II 1 GD  IECEX - IECEX UL 12.0001X Ex ia I T4 Ma, Ex ia IIC T4 Ga, Ex ia IIIC T101°C Da

Deeter House  
Valley Road  
Hughenden Valley  
Bucks HP14 4LW


Tel: +44 (0)1494 566 046  
Fax: +44 (0)1494 563 961  
Email: sales@deeter.co.uk



www.deeter.co.uk

# The DEETER Group®

## RPS-409A-IS2 Self-Contained Ultrasonic Sensor

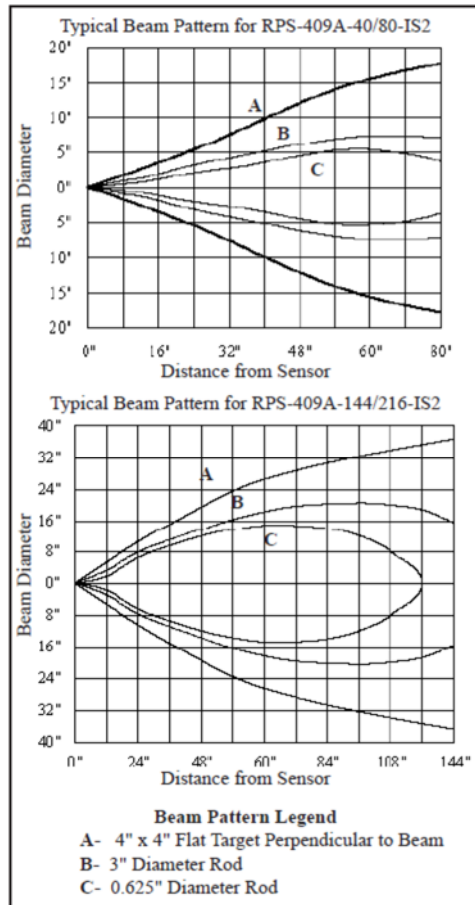

**M12 Receptacle  
Pin Out**  
(shown with European  
Color Code)



Pin 1 - Brown - Power  
Pin 2 - White - Analog Output  
Pin 3 - Blue - Ground  
Pin 4 - Black - Sync/Tx

Deeter House  
Valley Road  
Hughenden Valley  
Bucks HP14 4LW


Tel: +44 (0)1494 566 046  
Fax: +44 (0)1494 563 961  
Email: sales@deeter.co.uk



www.deeter.co.uk

# The DEETER Group®

## RPS-409A-IS2 Self-Contained Ultrasonic Sensor

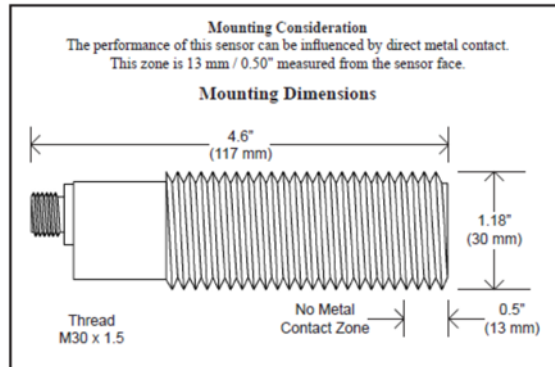

**Mounting Consideration:** The performance of this sensor can be influenced by direct metal contact. This zone is 12mm/0.50" measured from the sensor face. See Fig. D

### Ordering Code

Part Number	Range	Output/Description
RPS-409A-40-IS2	4 - 40"	0 - 10VDC Analog Output
RPS-409A-80-IS2	6 - 80"	0 - 10VDC Analog Output
RPS-409A-144-IS2	12 - 144"	0 - 10VDC Analog Output
RPS-409A-216-IS2	12 - 216"	0 - 10VDC Analog Output
F32-5496302		6' Cable, 4-PIN, IP68 / NEMA-6P, 18 AWG - Sold Separately
F32-5496305		16' Cable, 4-PIN, IP68 / NEMA-6P, 18 AWG - Sold Separately
ZSB-409A		3-Channel DC Positive Polarity Zener Safety Barrier

**All electrical equipment should be installed by a qualified/certified electrician.**

The Deeter Group follows a policy of continual development of its products and reserves the right to change specifications and/or features without notice

Deeter House  
Valley Road  
Hughenden Valley  
Bucks HP14 4LW

Tel: +44 (0)1494 566 046  
Fax: +44 (0)1494 563 961  
Email: sales@deeter.co.uk



www.deeter.co.uk